


## KVMP 24/9-Z12

Cable gland circular, brass, DIN 89280, M24-Pg9



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

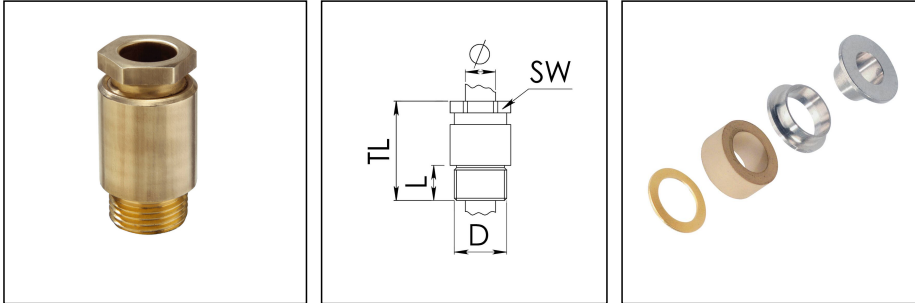

|                          |                       |
|--------------------------|-----------------------|
| Material cable gland     | Brass                 |
| Material sealing gasket  | EPDM                  |
| Material earthing insert | Brass chromium-plated |
| Temp. range min          | -40 °C                |
| Temp. range max          | 100 °C                |
| Protection class         | IP54                  |
| Thread type              | PG                    |
| Ø Connection thread D    | 9                     |
| Length screw-in thread L | 9 mm                  |
| Ø cable diameter min     | 10 mm                 |
| Ø cable diameter max     | 12,5 mm               |
| Key width SW             | 24 mm                 |
| Collar diameter (E)      | 27 mm                 |
| Total length TL          | 47 mm                 |
| Install. torques fitting | 10 N m                |
| Install. torques cap nut | 10 N m                |
| Surface                  | Bright                |
| Order no. bright         | 10010924              |
| Type                     | KVMP 24/9-Z12         |
| Packing unit             | 1                     |
| Tariff number            | 85369010              |
| EAN number               | 4007685109246         |

20.09.2026

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com