

KVMP 24/21-Z14

Cable gland circular, brass, DIN 89280, M24-Pg21



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



| | |
|---------------------------------|-----------------------|
| Material cable gland | Brass |
| Material sealing gasket | EPDM |
| Material earthing insert | Brass chromium-plated |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Protection class | IP54 |
| Thread type | PG |
| Ø Connection thread D | 21 |
| Length screw-in thread L | 9 mm |
| Ø cable diameter min | 12 mm |
| Ø cable diameter max | 14,5 mm |
| Key width SW | 24 mm |
| Collar diameter (E) | 27 mm |
| Total length TL | 47 mm |
| Install. torques fitting | 10 N m |
| Install. torques cap nut | 10 N m |
| Surface | Bright |
| Order no. bright | 10010953 |
| Type | KVMP 24/21-Z14 |
| Packing unit | 1 |
| Tariff number | 85369010 |
| EAN number | 4007685109536 |

23.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

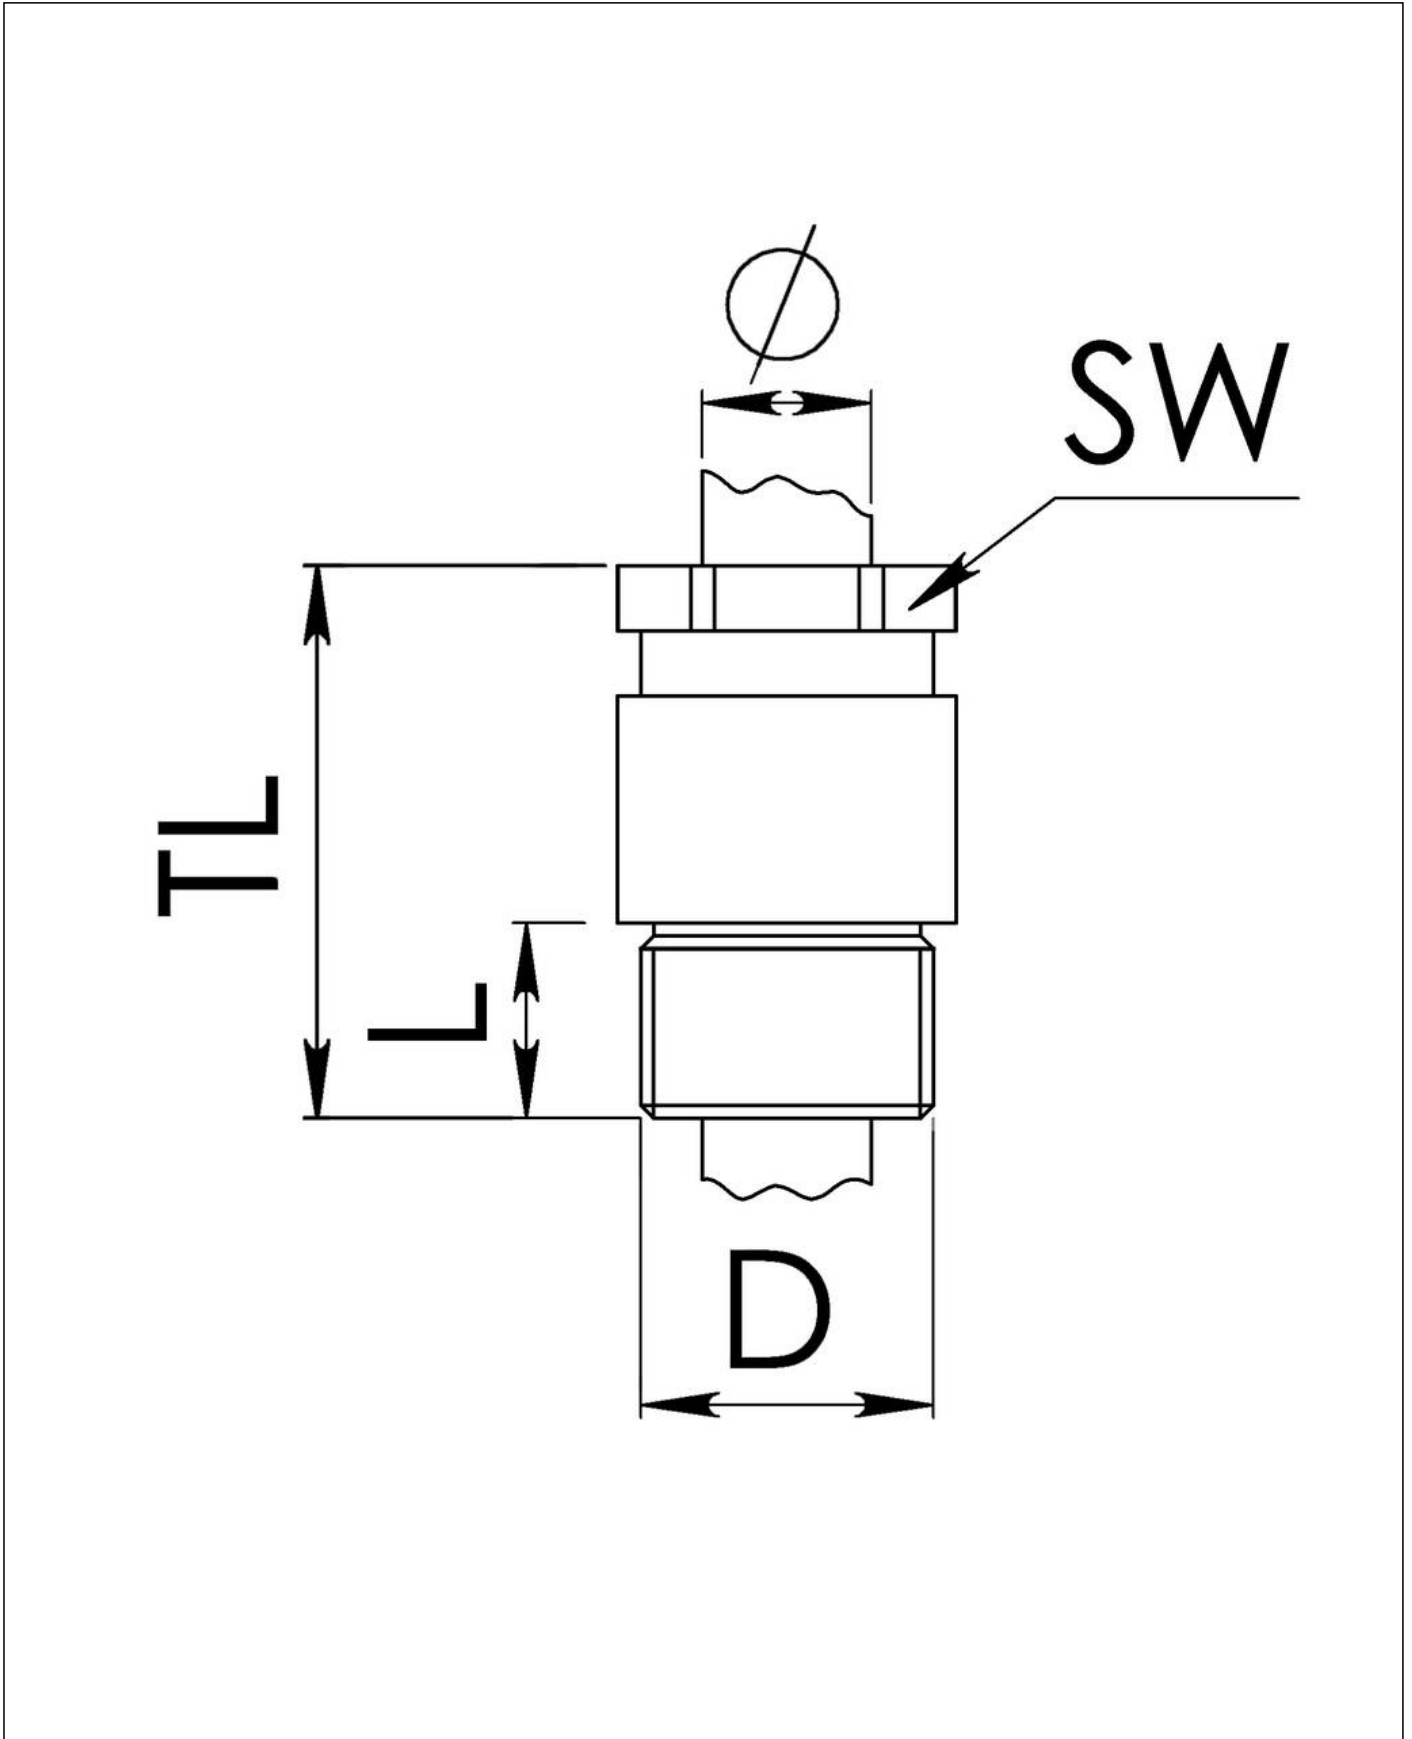

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com