

KVMP 72/48-Z48

Cable gland circular, brass, DIN 89280, M72-Pg48



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



Material cable gland	Brass
Material sealing gasket	EPDM
Material earthing insert	Brass chromium-plated
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	PG
Ø Connection thread D	48
Length screw-in thread L	12 mm
Ø cable diameter min	44 mm
Ø cable diameter max	48,5 mm
Key width SW	70 mm
Collar diameter (E)	75 mm
Total length TL	69 mm
Install. torques fitting	20 N m
Install. torques cap nut	15 N m
Surface	Bright
Order no. bright	10011023
Type	KVMP 72/48-Z48
Packing unit	1
Tariff number	85369010
EAN number	4007685110235

23.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

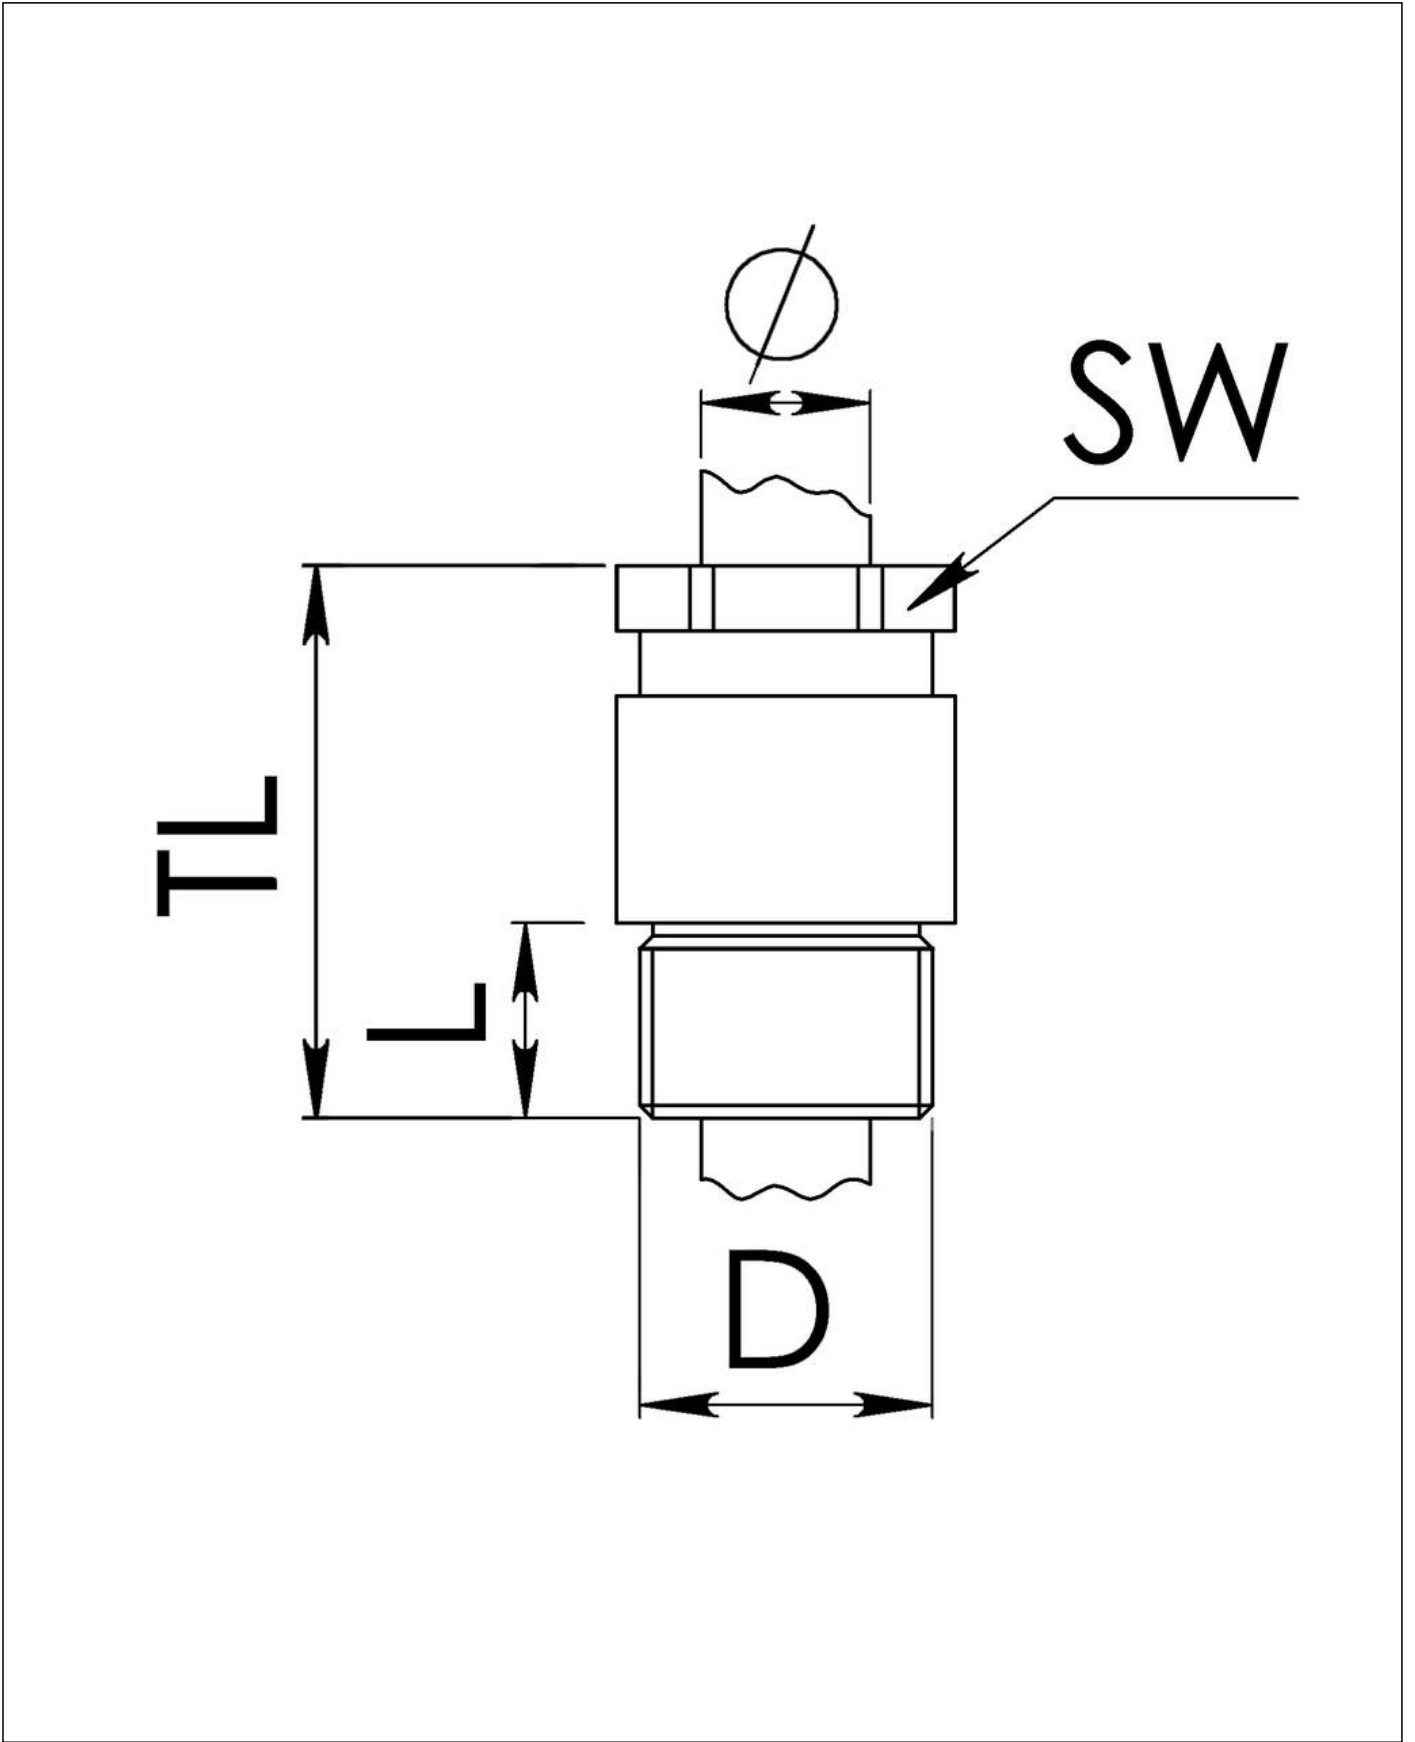

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com