


## KVMP 45/42-W30

Cable gland, brass according to DIN 89280, M45-Pg42



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

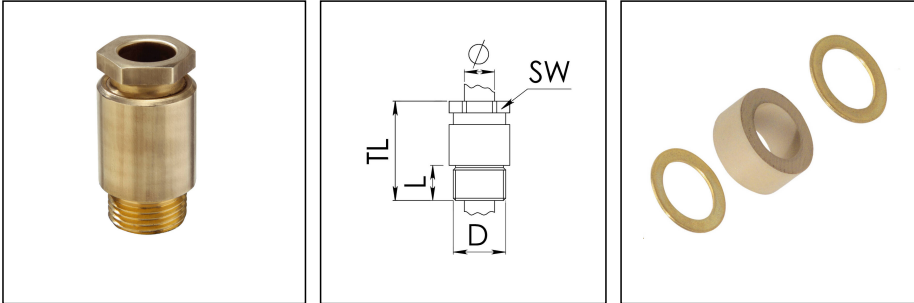

|                          |                |
|--------------------------|----------------|
| Material cable gland     | Brass          |
| Material sealing gasket  | EPDM           |
| Temp. range min          | -40 °C         |
| Temp. range max          | 100 °C         |
| Protection class         | IP54           |
| Thread type              | PG             |
| Ø Connection thread D    | 42             |
| Length screw-in thread L | 11 mm          |
| Ø cable diameter min     | 28 mm          |
| Ø cable diameter max     | 30,5 mm        |
| Key width SW             | 46 mm          |
| Collar diameter (E)      | 50 mm          |
| Total length TL          | 59 mm          |
| Install. torques fitting | 20 N m         |
| Install. torques cap nut | 15 N m         |
| Surface                  | Bright         |
| Order no. bright         | 10011122       |
| Type                     | KVMP 45/42-W30 |
| Packing unit             | 1              |
| Tariff number            | 74198090       |
| EAN number               | 4007685111225  |

28.07.2026


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

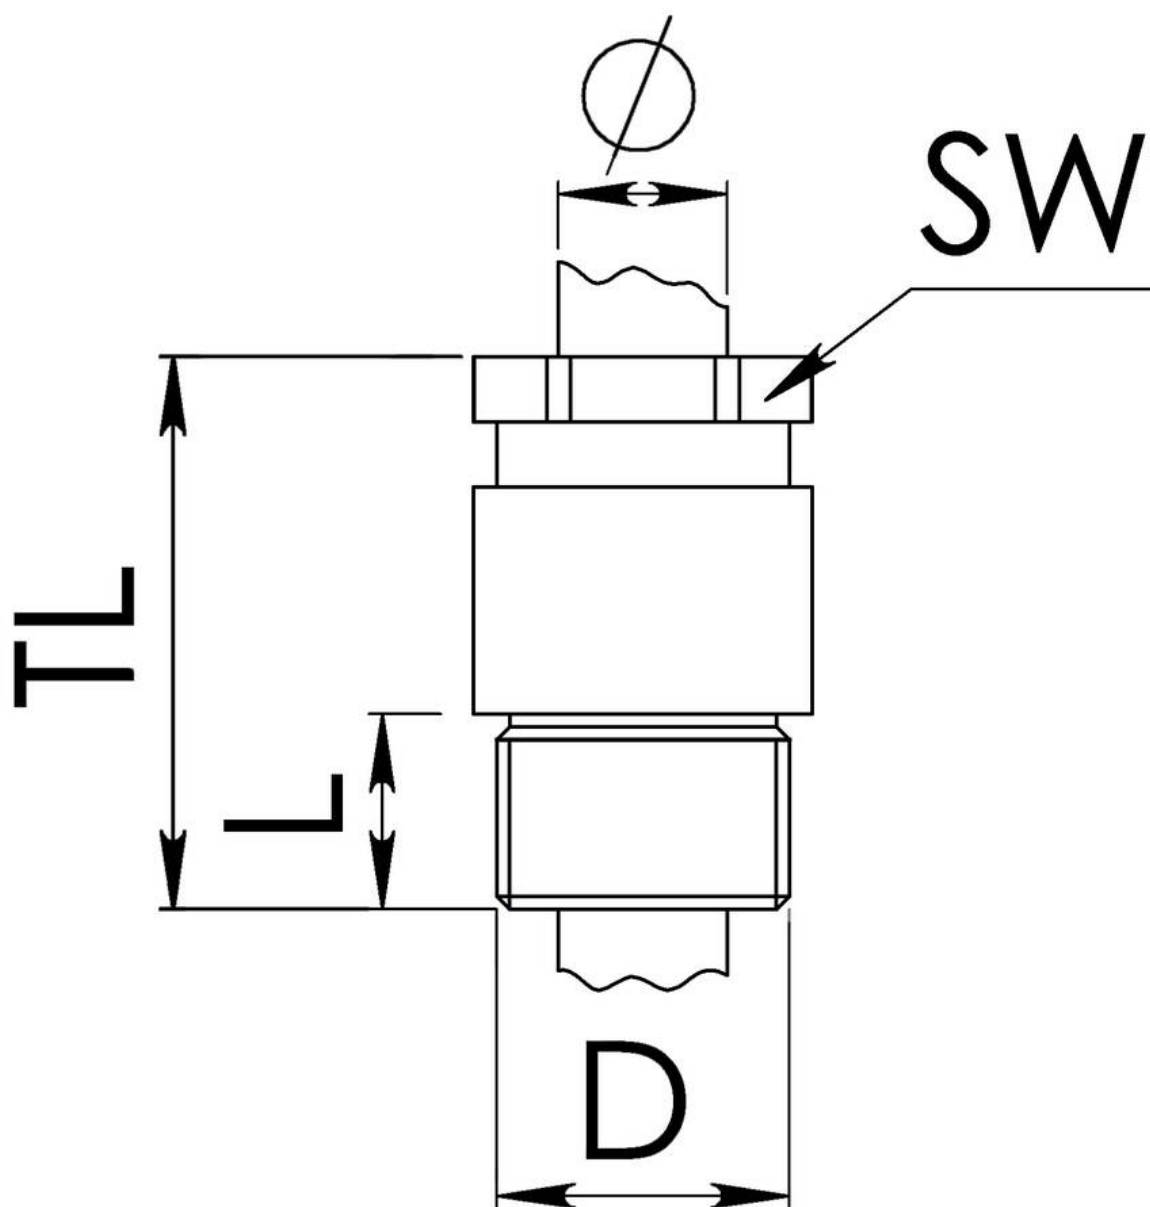

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com