


GM 56/Cr

Locknut, brass chromed-plated, according to DIN 89280, M56



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

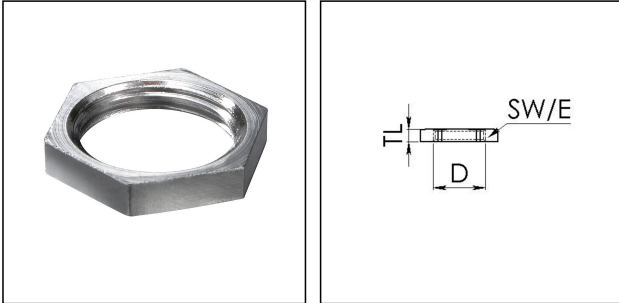

| | |
|--------------------------------|-----------------------|
| Material | Brass chromium-plated |
| Temp. range min | -150 °C |
| Temp. range max | 250 °C |
| Thread type | M |
| Ø Connection thread D | 56 |
| Lead | 2 |
| Key width SW | 65 mm |
| Collar diameter (E) | 70 mm |
| Total length TL | 9 mm |
| Advice | ** Octagonal |
| Surface | Chromium-plated |
| Order no. chrome-plated | 10011528 |
| Type | GM 56/Cr |
| Packing unit | 1 |
| ETIM-Classification | EC000940 |

23.05.2026

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com