


EVSG 50 LG

Stop end, polyamide, RAL 7035, M50



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

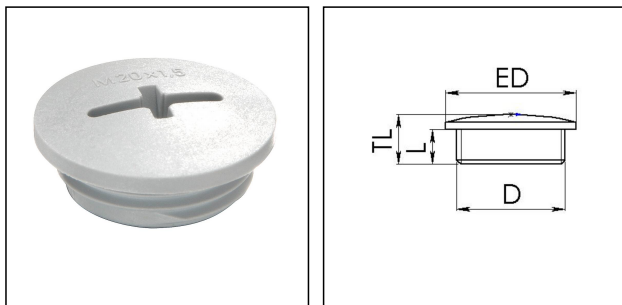

| | |
|---------------------------------|-----------------------------|
| Material | Polyamide, fibre reinforced |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Glow wire test | 650 °C |
| Protection class | IP56 |
| Advice | with sealing IP66/IP68 |
| Thread type | M |
| Ø Connection thread D | 50 |
| Lead | 1,5 |
| Length screw-in thread L | 10 mm |
| Total length TL | 15 mm |
| External diameter ED | 56 mm |
| Product Color | RAL 7035 |
| Order no. RAL 7035 | 10060630 |
| Type | EVSG 50 LG |
| Packing unit | 50 |
| EAN number | 4007685606301 |
| Tariff number | 39269097 |
| ETIM-Classification | EC000032 |

Recommended accessories

| | |
|-------------------|----------|
| EMUG 50 LG | 10060776 |
| EADR 50 | 10062807 |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

23.05.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com



Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice