


VS 16 LG

Stop end, polystyrene, RAL 7035, Pg16



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

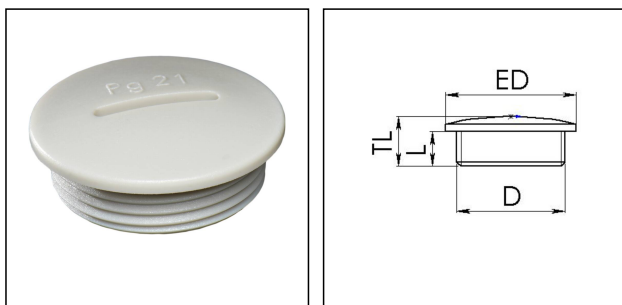

Material	Polystyrene, impact resistant
Temp. range min	-20 °C
Temp. range max	60 °C
Protection class	IP56
Advice	with sealing IP66/IP68
Thread type	PG
Ø Connection thread D	16
Length screw-in thread L	6 mm
Total length TL	9,5 mm
External diameter ED	27 mm
Product Color	RAL 7035
Order no. RAL 7035	10060712
Type	VS 16 LG
Packing unit	100
EAN number	4007685607124
Tariff number	39269097
ETIM-Classification	EC000032

Recommended accessories

MUG 16 LG	10060674
ADR 16	10061423

12.08.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

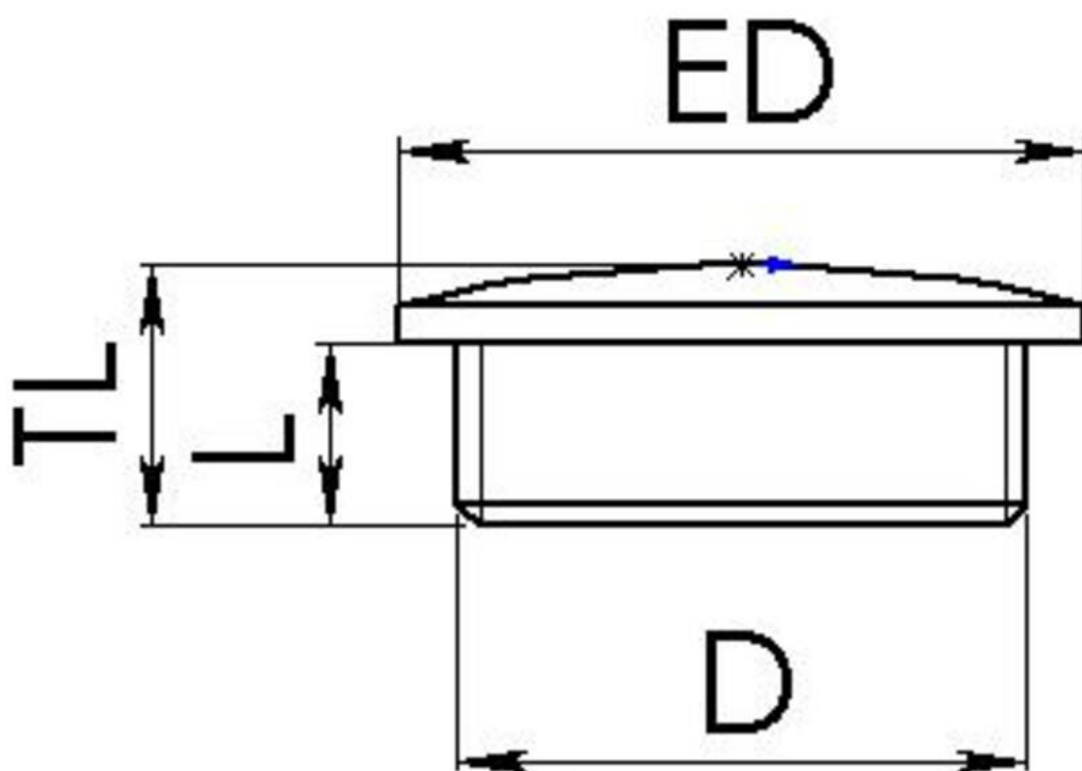

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice