


## EMUF 32 LG

Locknut flame-retardant, polyamide, RAL 7035, M32



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

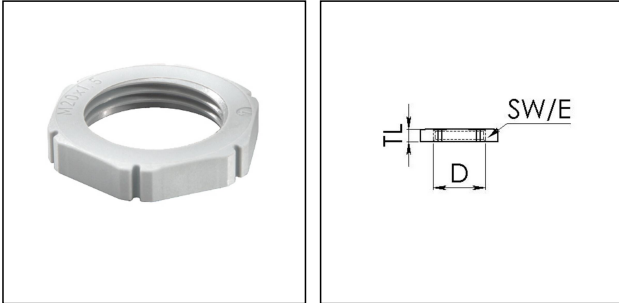

|                                   |                             |
|-----------------------------------|-----------------------------|
| <b>Material</b>                   | Polyamide UL94-V0           |
| <b>Temp. range min</b>            | -40 °C                      |
| <b>Temp. range max</b>            | 100 °C                      |
| <b>Glow wire test</b>             | 960 °C                      |
| <b>Hazard level EN acc. 45545</b> | R22=HL3 / R23=HL3 / R24=HL3 |
| <b>Thread type</b>                | M                           |
| <b>Ø Connection thread D</b>      | 32                          |
| <b>Lead</b>                       | 1,5                         |
| <b>Total length TL</b>            | 6 mm                        |
| <b>Key width SW</b>               | 40 mm                       |
| <b>Collar diameter (E)</b>        | 45 mm                       |
| <b>Product Color</b>              | RAL 7035                    |
| <b>Order no. RAL 7035</b>         | 10060814                    |
| <b>Type</b>                       | EMUF 32 LG                  |
| <b>Packing unit</b>               | 100                         |
| <b>EAN number</b>                 | 4007685608145               |
| <b>Tariff number</b>              | 39269097                    |
| <b>ETIM-Classification</b>        | EC000940                    |

12.08.2026


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

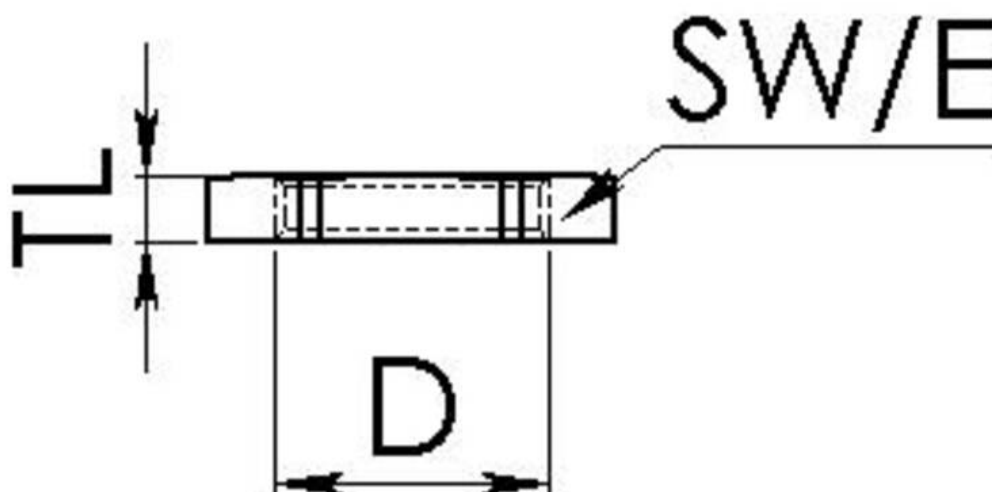

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice