


EVSG 20 BK

Stop end, polyamide, RAL 9005, M20



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

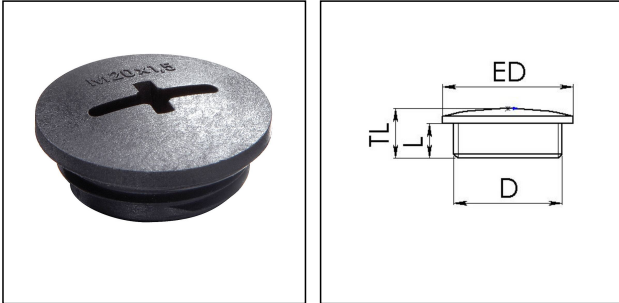

| | |
|---------------------------------|-----------------------------|
| Material | Polyamide, fibre reinforced |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Glow wire test | 650 °C |
| Protection class | IP56 |
| Advice | with sealing IP66/IP68 |
| Thread type | M |
| Ø Connection thread D | 20 |
| Lead | 1,5 |
| Length screw-in thread L | 6 mm |
| Total length TL | 9,5 mm |
| External diameter ED | 24 mm |
| Product Color | RAL 9005 |
| Order no. RAL 9005 | 10061832 |
| Type | EVSG 20 BK |
| Packing unit | 100 |
| EAN number | 4007685618328 |
| Tariff number | 39269097 |
| ETIM-Classification | EC000032 |

Recommended accessories

| | |
|-------------------|----------|
| EMUG 20 BK | 10061782 |
| EADR 20 | 10062803 |

Your Contact:

WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com

23.05.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
 +49-4191-508-0 ·  +49-4191-508-209
contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com