


EVSG 40 SG

Stop end, polyamide, RAL 7001, M40



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

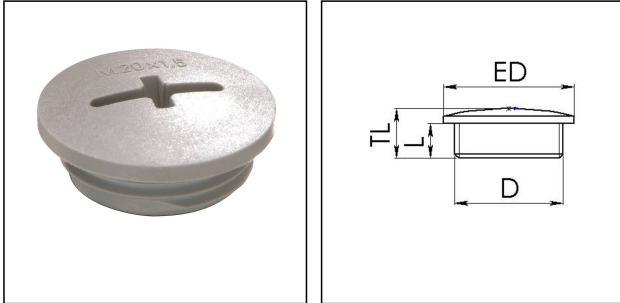

| | |
|---------------------------------|-----------------------------|
| Material | Polyamide, fibre reinforced |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Glow wire test | 650 °C |
| Protection class | IP56 |
| Advice | with sealing IP66/IP68 |
| Thread type | M |
| Ø Connection thread D | 40 |
| Lead | 1,5 |
| Length screw-in thread L | 8 mm |
| Total length TL | 13 mm |
| External diameter ED | 46 mm |
| Product Color | RAL 7001 |
| Order no. RAL 7001 | 10062519 |
| Type | EVSG 40 SG |
| Packing unit | 50 |
| EAN number | 4007685625197 |
| Tariff number | 39269097 |
| ETIM-Classification | EC000032 |

Recommended accessories

| | |
|-------------------|----------|
| EMUG 40 SG | 10062717 |
| EADR 40 | 10062806 |

Your Contact:

WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com

23.05.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
 +49-4191-508-0 ·  +49-4191-508-209
contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com