


EVSG 50 SG

Stop end, polyamide, RAL 7001, M50



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

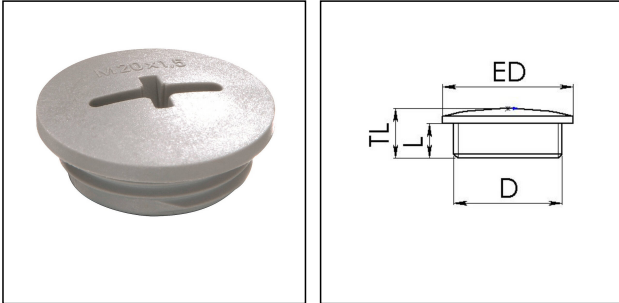

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Protection class	IP56
Advice	with sealing IP66/IP68
Thread type	M
Ø Connection thread D	50
Lead	1,5
Length screw-in thread L	10 mm
Total length TL	15 mm
External diameter ED	56 mm
Product Color	RAL 7001
Order no. RAL 7001	10062520
Type	EVSG 50 SG
Packing unit	50
EAN number	4007685625203
Tariff number	39269097
ETIM-Classification	EC000032

Recommended accessories

EMUG 50 SG	10062718
EADR 50	10062807

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

08.07.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

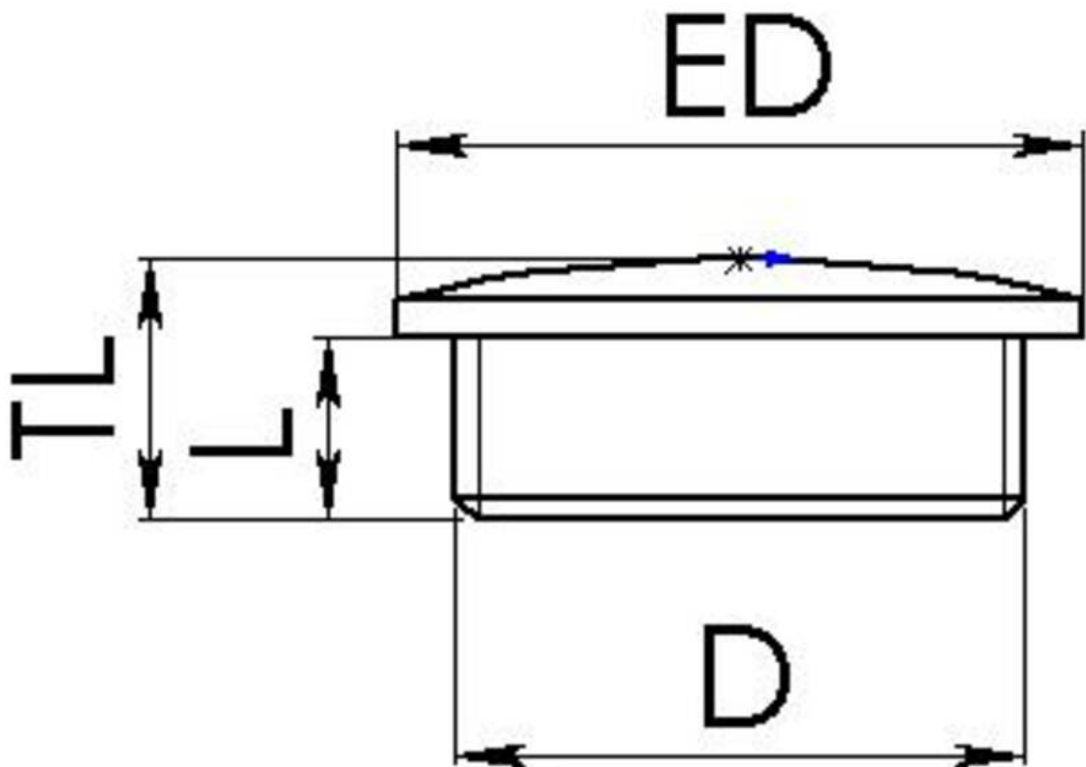

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com