


EVSF 12 LG

Stop end flame-retardant, polyamide, RAL 7035, M12



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

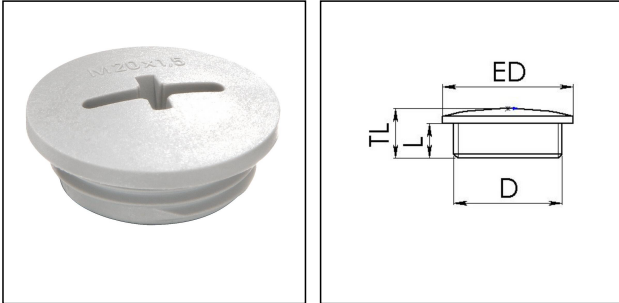

Material	Polyamide UL94-V0
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	960 °C
Protection class	IP56
Hazard level EN acc. 45545	R22=HL3 / R23=HL3 / R24=HL3
Advice	with sealing IP66/IP68
Thread type	M
Ø Connection thread D	12
Lead	1,5
Length screw-in thread L	6 mm
Total length TL	8 mm
External diameter ED	15 mm
Product Color	RAL 7035
Order no. RAL 7035	10064666
Type	EVSF 12 LG
Packing unit	100
EAN number	4007685646666
Tariff number	39269097
ETIM-Classification	EC000032

Recommended accessories

EMUF 12 LG	10060810
-------------------	----------

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

23.05.2026

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com