


## SH300 -575-K(220)-P14-R01-I01

Searchlight with metal halide lamp Ø 300mm 575W 230V

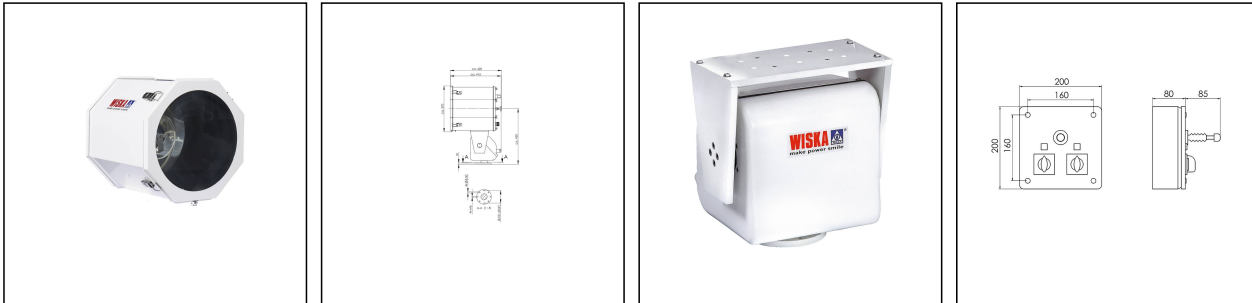

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

|                                |  |
|--------------------------------|--|
| <b>WISKA-Order no.</b>         | 10100823                                 |
| <b>Type</b>                    | SH300 -575-K(220)-P14-R01-I01            |
| <b>P/T-Type</b>                | FL20/230VAC                              |
| <b>Horizontal °/s</b>          | 5 °/sec                                  |
| <b>Vertical °/s</b>            | 2,4 °/sec                                |
| <b>Rotation horizontal</b>     | 330 °                                    |
| <b>Rotation vertical</b>       | +50 ° / -70 °                            |
| <b>Control unit</b>            | RCU-A                                    |
| <b>Material</b>                | Stainless steel                          |
| <b>Wattage</b>                 | 575 W                                    |
| <b>Colour</b>                  | RAL 9016                                 |
| <b>Surface</b>                 | Powder coated                            |
| <b>Voltage</b>                 | 230 V                                    |
| <b>Type of Voltage</b>         | AC                                       |
| <b>Frequence</b>               | 50/60 Hz                                 |
| <b>Protection class</b>        | IP56                                     |
| <b>Operational areas</b>       | Outdoor                                  |
| <b>Reflector</b>               | Glass                                    |
| <b>Focusing</b>                | manuel                                   |
| <b>Lightsource</b>             | Metal halide lamp                        |
| <b>Lightsource incl.</b>       | Yes                                      |
| <b>Colour temperature</b>      | 6000 K                                   |
| <b>Luminous flux</b>           | 49000 lm                                 |
| <b>Average lamp durability</b> | 750 h                                    |
| <b>Light performance</b>       | immediately, Maximum light after 45 sec. |

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

|                               |                              |
|-------------------------------|------------------------------|
| <b>Range (1 lux)</b>          | 2280 m                       |
| <b>Light intensity mio/cd</b> | 5,2                          |
| <b>Divergence</b>             | 6°/10                        |
| <b>Lampholder</b>             | SFc10-4                      |
| <b>Number of lampholder</b>   | 1 ST                         |
| <b>Temp. range min</b>        | -25 °C                       |
| <b>Temp. range max</b>        | 45 °C                        |
| <b>Power supply, standard</b> | PSUH: HMI, 575W, 230VAC      |
| <b>Type of cable gland</b>    | ESKVS 20                     |
| <b>Material cable gland</b>   | Polyamide                    |
| <b>Type of cable</b>          | non-armoured                 |
| <b>Power cable</b>            | H07RN-F 3x1,5mm <sup>2</sup> |
| <b>Ø cable diameter min</b>   | 6 mm                         |
| <b>Ø cable diameter max</b>   | 13 mm                        |
| <b>Globe colour</b>           | Clear                        |
| <b>Mounting</b>               | Upside                       |
| <b>Weight</b>                 | 52 kg                        |
| <b>Tariff number</b>          | 94054910                     |

Remarks:

SH300: Searchlight with metal halide lamp 575W, IP56 glass parabolic mirror 300mm  
575W

K(220):Power supply unit, conventional, PSUH, 575W, 220V

P14: Pan and Tilt unit FL20, 230V

R01: Remote control unit RCU-A, surface, 230V

I01: manuel,stepless focusing

Equipment:

- Toughened front glass
- Rubber sealing
- Quick fastening devices
- Ignition
- Connection cable 3m
- Anti dazzle screen

**Spare parts**

|   |          |
|---|----------|
| <b>SP-S-FL20 Motor (230VAC) Kit tilt (V)</b>    | 22000048 |
| <b>SP-S-FL20 Motor (230VAC) Kit pan (H)</b>     | 22000049 |
| <b>SP-S-Quick releases clamp (4 pcs)</b>        | 22000050 |
| <b>SP-S-RCU-Position control switch XD2-GE3</b> | 22000060 |

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

|  |          |
|--|----------|
| <b>SP-S-RCU-ON/OFF Switch</b>                  | 22000061 |
| <b>SP-S-RCU-Lamp on indicator 230V square</b>  | 22000062 |
| <b>SP-SW300-Front frame + Front glass cpl.</b> | 22000091 |
| <b>SP-SH/SKS-Metal halide discharge lamp</b>   | 22000107 |
| <b>SP-SH/SKS-Igniter type IG 575 KVG</b>       | 22000108 |
| <b>SP-SH/SKS-Lamp holder SFc10-4 for 575W</b>  | 22000109 |
| <b>SP-SH/SKS-Series impedance for 575W</b>     | 22000110 |
| <b>SP-SW-Gasket for searchlight housing</b>    | 22000116 |
| <b>SP-S-FL20 O-ring for casing lid</b>         | 22000598 |

12.05.2026


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

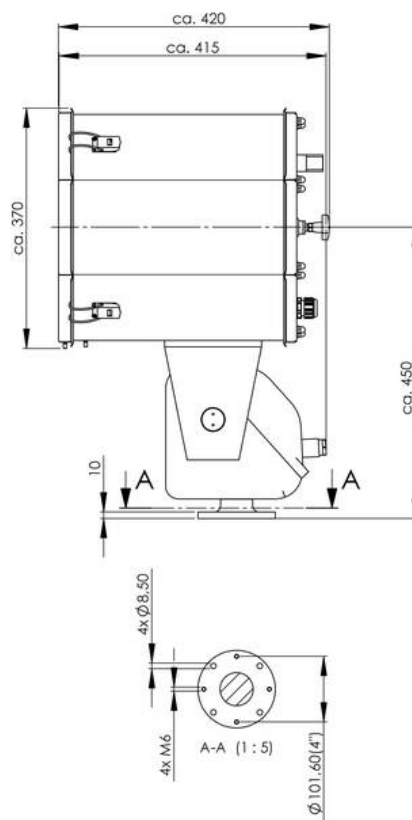


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

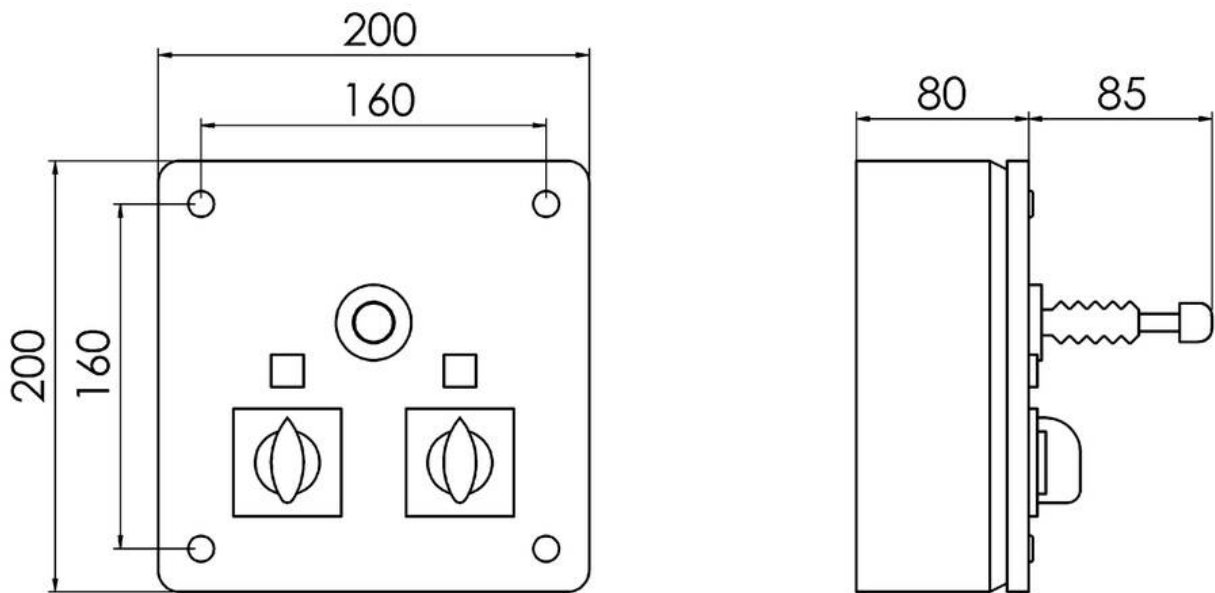

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com