


ESKE/1-L-i 32 LT

Ex-cable gland LowTemp, polyamide with long thread, RAL 9005/5012, M32



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

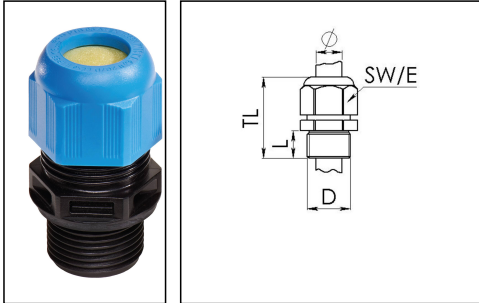

| | |
|--------------------------|--------------------------------|
| Material cable gland | Polyamide |
| Material sealing gasket | Silicone |
| Temp. range min | -60 °C |
| Temp. range max | 75 °C |
| Protection class | IP66 / IP68 (5 bar 30 min) |
| Type of protection | Ex eb, Ex tb |
| Ex-Certificate | IECEx, ATEX |
| Glow wire test | 750 °C |
| Thread type | M |
| Ø Connection thread D | 32 |
| Lead | 1,5 |
| Length screw-in thread L | 15 mm |
| Ø cable diameter min | 13 mm |
| Ø cable diameter max | 21 mm |
| Key width SW | 36 mm |
| Collar diameter (E) | 40 mm |
| Total length TL | 45 mm - 53 mm |
| Install. torques fitting | 4,5 N m |
| Install. torques cap nut | 3 N m |
| Equipment | Incl. connection thread gasket |
| Product Color | RAL 5012 / RAL 9005 |
| Order no. RAL 9005 | 10103457 |
| Type | ESKE/1-L-i 32 LT |
| Packing unit | 25 |
| EAN number | 4007685085359 |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

| | |
|----------------------------|----------|
| Tariff number | 39269097 |
| ETIM-Classification | EC000441 |

Recommended accessories

| | |
|-------------------|----------|
| EMUG 32 BK | 10061784 |
| RDE 32 LT | 10063934 |

12.05.2026

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com