


## EBFS-36-40-BG

Conduit fitting, straight, non-metallic, RAL 7031, NW 36 / M40



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

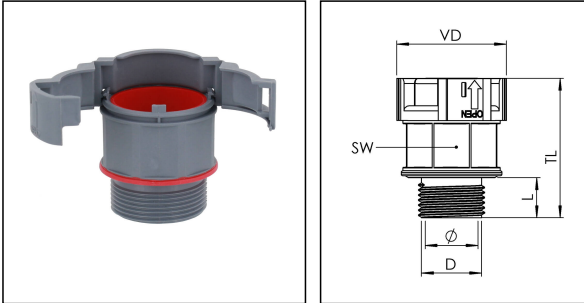

<b>Material Conduit fitting</b>	polyamide UL94-V0
<b>Material Connection thread</b>	polyamide UL94-V0
<b>Material sealing gasket</b>	TPU
<b>Protection class</b>	IP66, IP68
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Operational areas</b>	EN 45545 - Railway
<b>NW</b>	36
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	40
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	14 mm
<b>Ø closure VD</b>	55,7 mm
<b>Ø inside</b>	33,5 mm
<b>Key width SW</b>	50 mm
<b>Total length TL</b>	53,6 mm
<b>Type of conduit fitting</b>	straight
<b>UL 1696</b>	Yes
<b>Product Color</b>	RAL 7031
<b>Type</b>	EBFS-36-40-BG
<b>Order no. RAL 7031</b>	10106856
<b>Packing unit</b>	10
<b>EAN number</b>	4007686033021
<b>Tariff number</b>	39174000
<b>ETIM-Classification</b>	EC001176

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

**Remarks:**

UL approval only in conjunction with UL approved corrugated conduits

**Recommended accessories**

<b>BCA-S-36-BG</b>	10107085
<b>BCAV-S-36-BG</b>	10107102
<b>BCIV-S-36-BG</b>	10107118
<b>BCA-36-D-BG</b>	10107132
<b>BCAV-36-D-BG</b>	10107146
<b>BCAB-L-36-BG</b>	10109197
<b>BCAV-H-36-BG</b>	10109213
<b>BCIB-H-36-BG</b>	10109236

26.06.2026

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com