

EBFS-36-50-BK

Conduit fitting, straight, non-metallic, RAL 9005, NW 36 / M50



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



| | |
|-----------------------------------|--------------------|
| Material Conduit fitting | polyamide UL94-V0 |
| Material Connection thread | polyamide UL94-V0 |
| Material sealing gasket | TPU |
| Protection class | IP68, IP66 |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Operational areas | EN 45545 - Railway |
| NW | 36 |
| Thread type | M |
| Ø Connection thread D | 50 |
| Lead | 1,5 |
| Length screw-in thread L | 15 mm |
| Ø closure VD | 55,7 mm |
| Ø inside | 33,5 mm |
| Key width SW | 50 mm |
| Total length TL | 55,1 mm |
| Type of conduit fitting | straight |
| UL 1696 | Yes |
| Product Color | RAL 9005 |
| Type | EBFS-36-50-BK |
| Order no. RAL 9005 | 10106874 |
| Packing unit | 10 |
| EAN number | 4007686033397 |
| Tariff number | 39174000 |
| ETIM-Classification | EC001176 |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Remarks:

UL approval only in conjunction with UL approved corrugated conduits

Recommended accessories

| | |
|---------------------|----------|
| EMUF 50 BK | 10061776 |
| BCA-S-36-BK | 10107078 |
| BCAV-S-36-BK | 10107093 |
| BCIV-S-36-BK | 10107110 |
| BCA-36-D-BK | 10107125 |
| BCAV-36-D-BK | 10107139 |
| BCAB-L-36-BK | 10109188 |
| BCAV-H-36-BK | 10109205 |
| BCIB-H-36-BK | 10109227 |

23.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

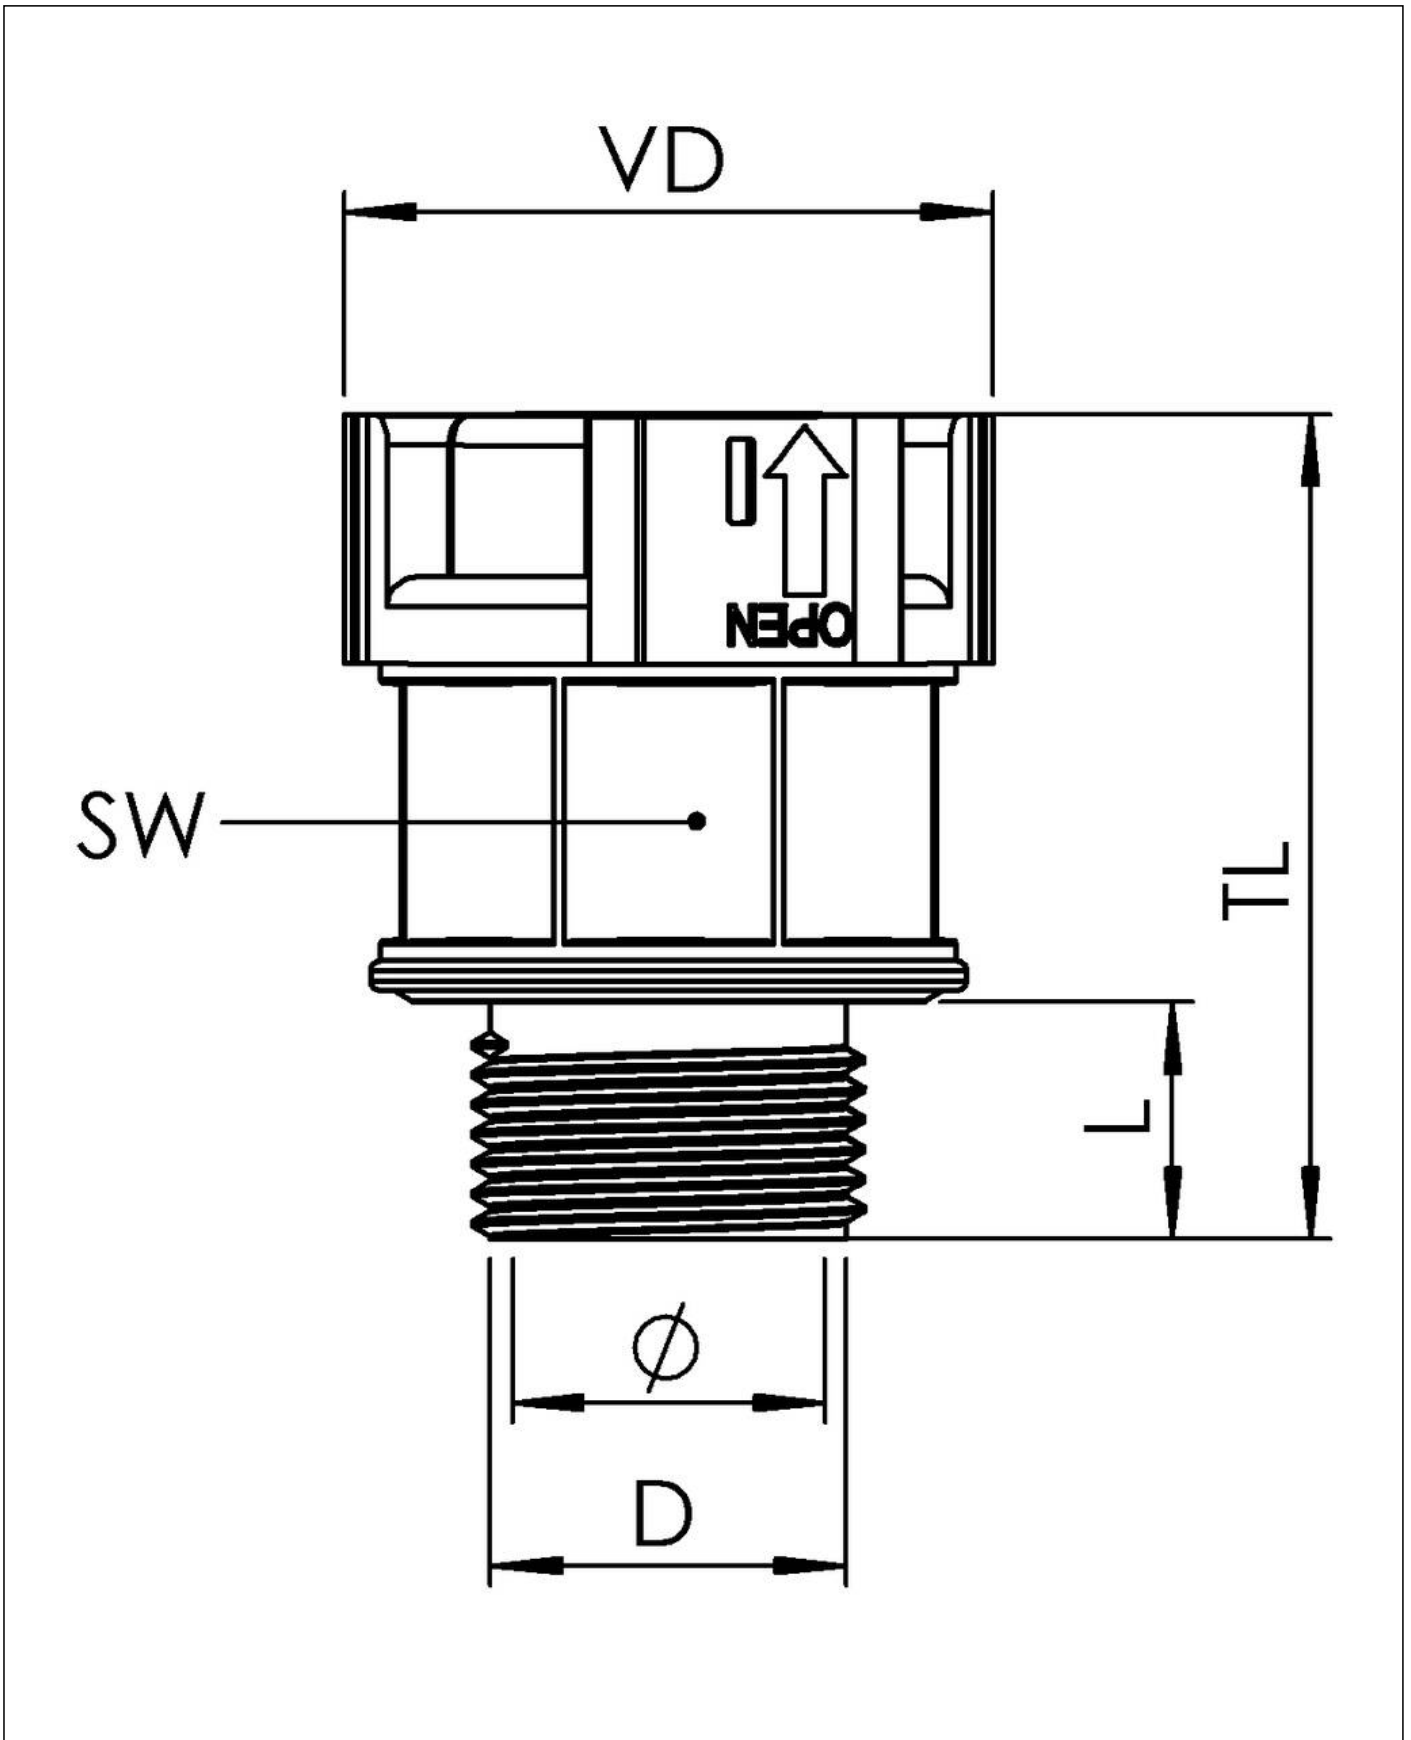

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com