


EMBFS-36-50-BG

Conduit fitting, straight, plastic/brass nickel-plated, RAL 7031, NW 36 / M50



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

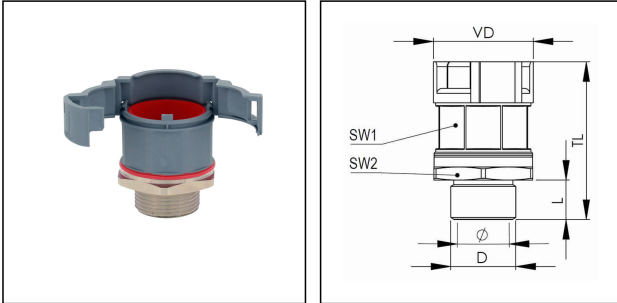

| | |
|-----------------------------------|---------------------|
| Material Conduit fitting | polyamide UL94-V0 |
| Material Connection thread | Brass nickel-plated |
| Material sealing gasket | TPU |
| Protection class | IP68, IP66 |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Operational areas | EN 45545 - Railway |
| NW | 36 |
| Thread type | M |
| Ø Connection thread D | 50 |
| Lead | 1,5 |
| Length screw-in thread L | 14 mm |
| Ø closure VD | 55,7 mm |
| Ø inside | 33,5 mm |
| Key width SW1 | 50 mm |
| Key width SW2 | 55 mm |
| Total length TL | 62,2 mm |
| Type of conduit fitting | straight |
| UL 1696 | Yes |
| Product Color | RAL 7031 |
| Type | EMBFS-36-50-BG |
| Order no. RAL 7031 | 10106890 |
| Packing unit | 10 |
| EAN number | 4007686033717 |
| Tariff number | 74122000 |

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

ETIM-Classification

EC001176

Remarks:

UL approval only in conjunction with UL approved corrugated conduits

Recommended accessories

| | |
|---------------------|----------|
| EMMU 50 | 10063147 |
| BCA-S-36-BG | 10107085 |
| BCAV-S-36-BG | 10107102 |
| BCIV-S-36-BG | 10107118 |
| BCA-36-D-BG | 10107132 |
| BCAV-36-D-BG | 10107146 |
| BCAB-L-36-BG | 10109197 |
| BCAV-H-36-BG | 10109213 |
| BCIB-H-36-BG | 10109236 |

26.06.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

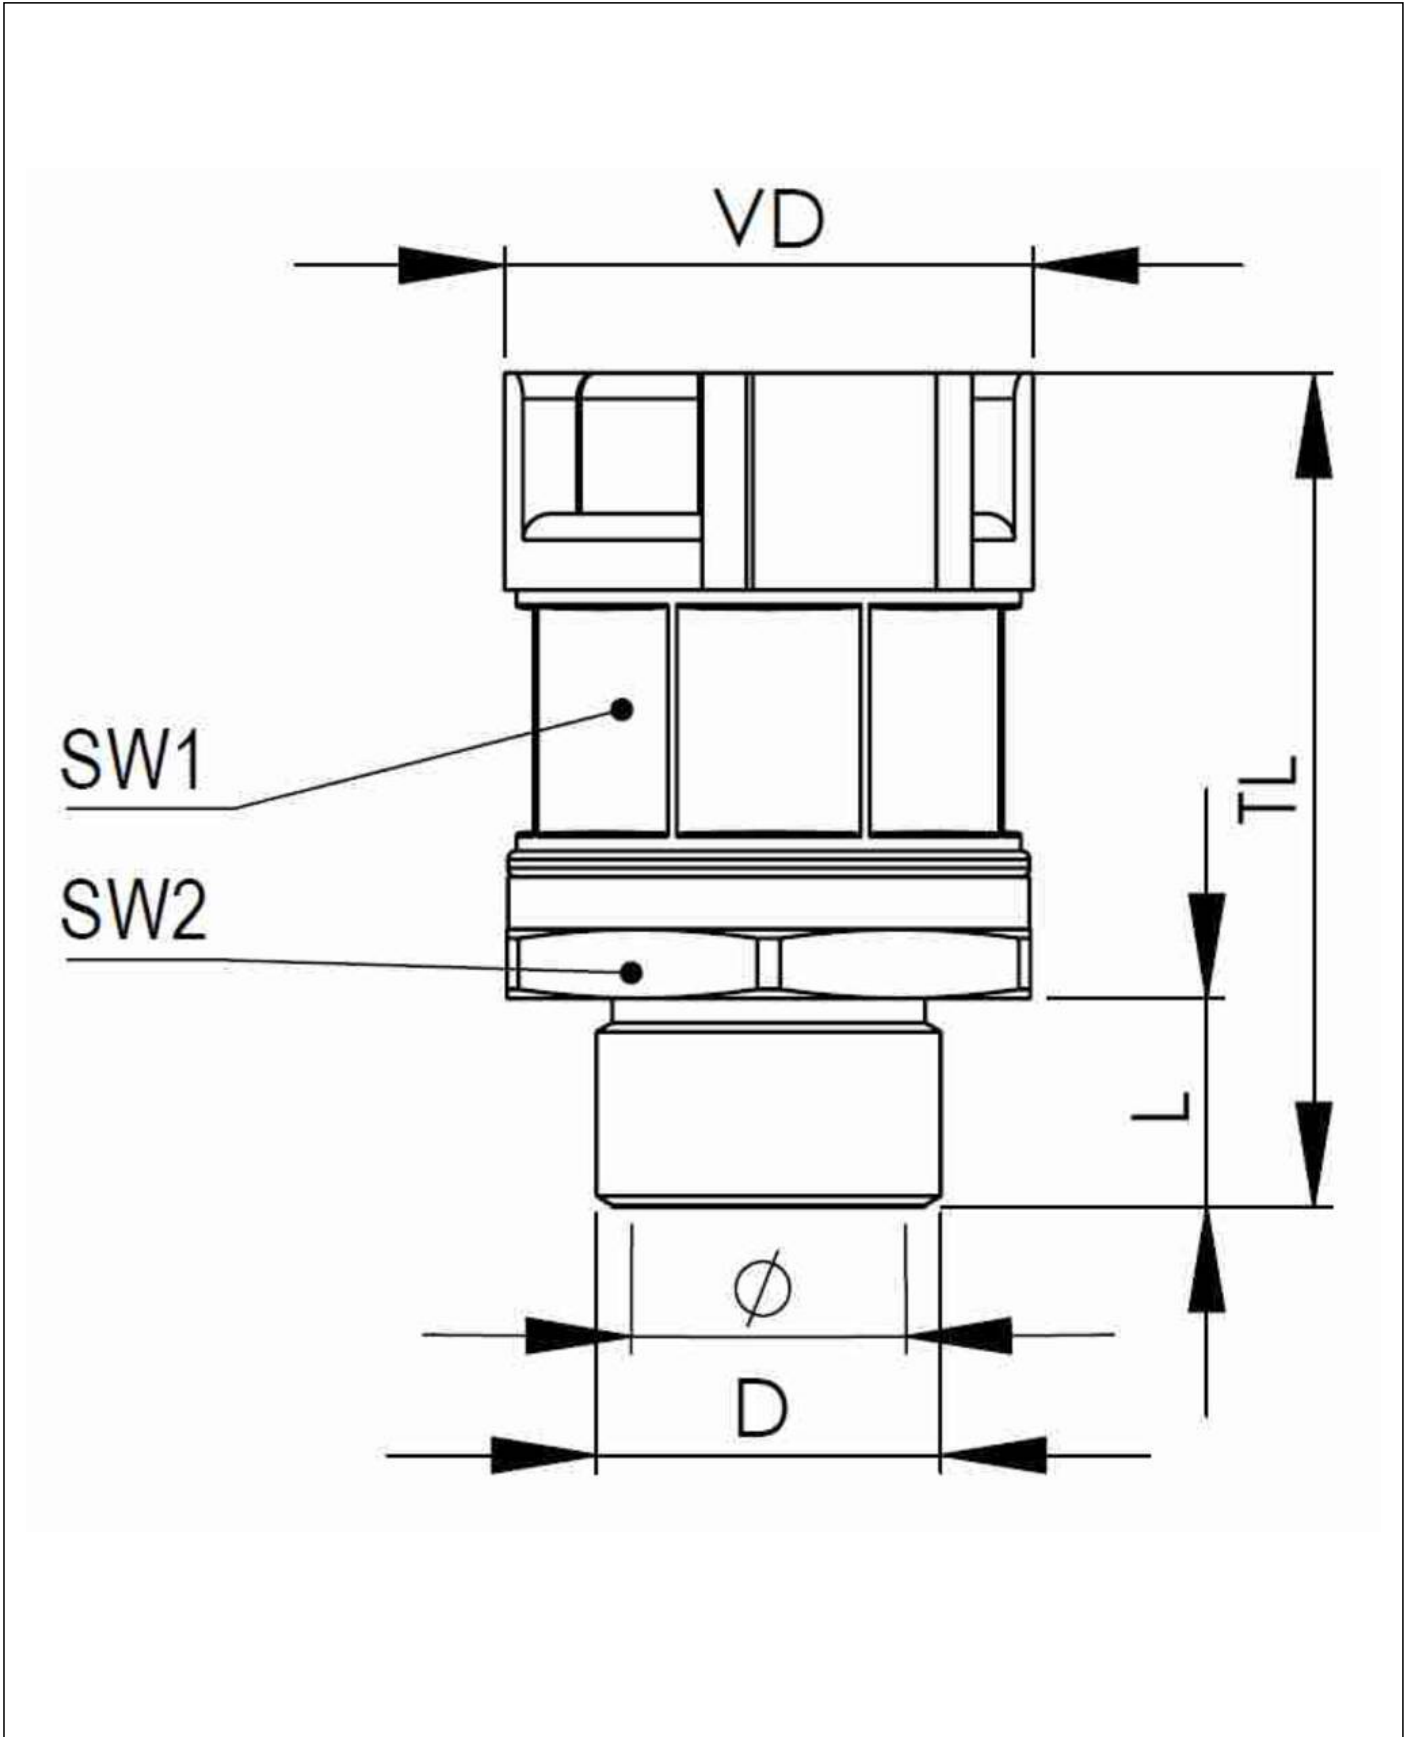

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com