

## BCAV-S-29-BG

Conduit PA6 UL94-V2, RAL 7031, NW29



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



<b>Material</b>	PA6 UL94-V2
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	125 °C
<b>Operational areas</b>	Mechanical plant engineering
<b>Product Color</b>	RAL 7031
<b>NW</b>	29
<b>External diameter ED</b>	34,5 mm
<b>Ø inside</b>	29 mm
<b>Profile width A</b>	3,4 mm
<b>Width B</b>	2,3 mm
<b>Bending radius R</b>	77 mm
<b>Wall thickness S</b>	0,4 mm
<b>Model</b>	Standard profile
<b>Type</b>	BCAV-S-29-BG
<b>Order no. RAL 7031</b>	10107101
<b>Packing unit</b>	25 m
<b>EAN number</b>	4007686037333
<b>Tariff number</b>	39173900
<b>ETIM-Classification</b>	EC001175

### Recommended accessories

<b>EBFS-29-32-BG</b>	10106854
<b>EBFS-29-40-BG</b>	10106855

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

<b>EMBFS-29-32-BG</b>	10106887
<b>EMBFS-29-40-BG</b>	10106888
<b>EMBFSI-29-32-BG</b>	10106919
<b>EBF45-29-32-BG</b>	10106953
<b>EBF90-29-32-BG</b>	10106971
<b>EMBF45-29-32-BG</b>	10106991
<b>EMBF45-29-40-BG</b>	10106992
<b>EMBF90-29-32-BG</b>	10107007
<b>EMBF90-29-40-BG</b>	10107008
<b>EMBF45I-29-32-BG</b>	10107337
<b>EMBF90I-29-32-BG</b>	10107360
<b>EMBFSCG-29-32-BG</b>	10107376
<b>EMBF45CG-29-32-BG</b>	10107990
<b>EMBF90CG-29-32-BG</b>	10108003
<b>EBF90-29-40-BG</b>	10108888

12.05.2026

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com




Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

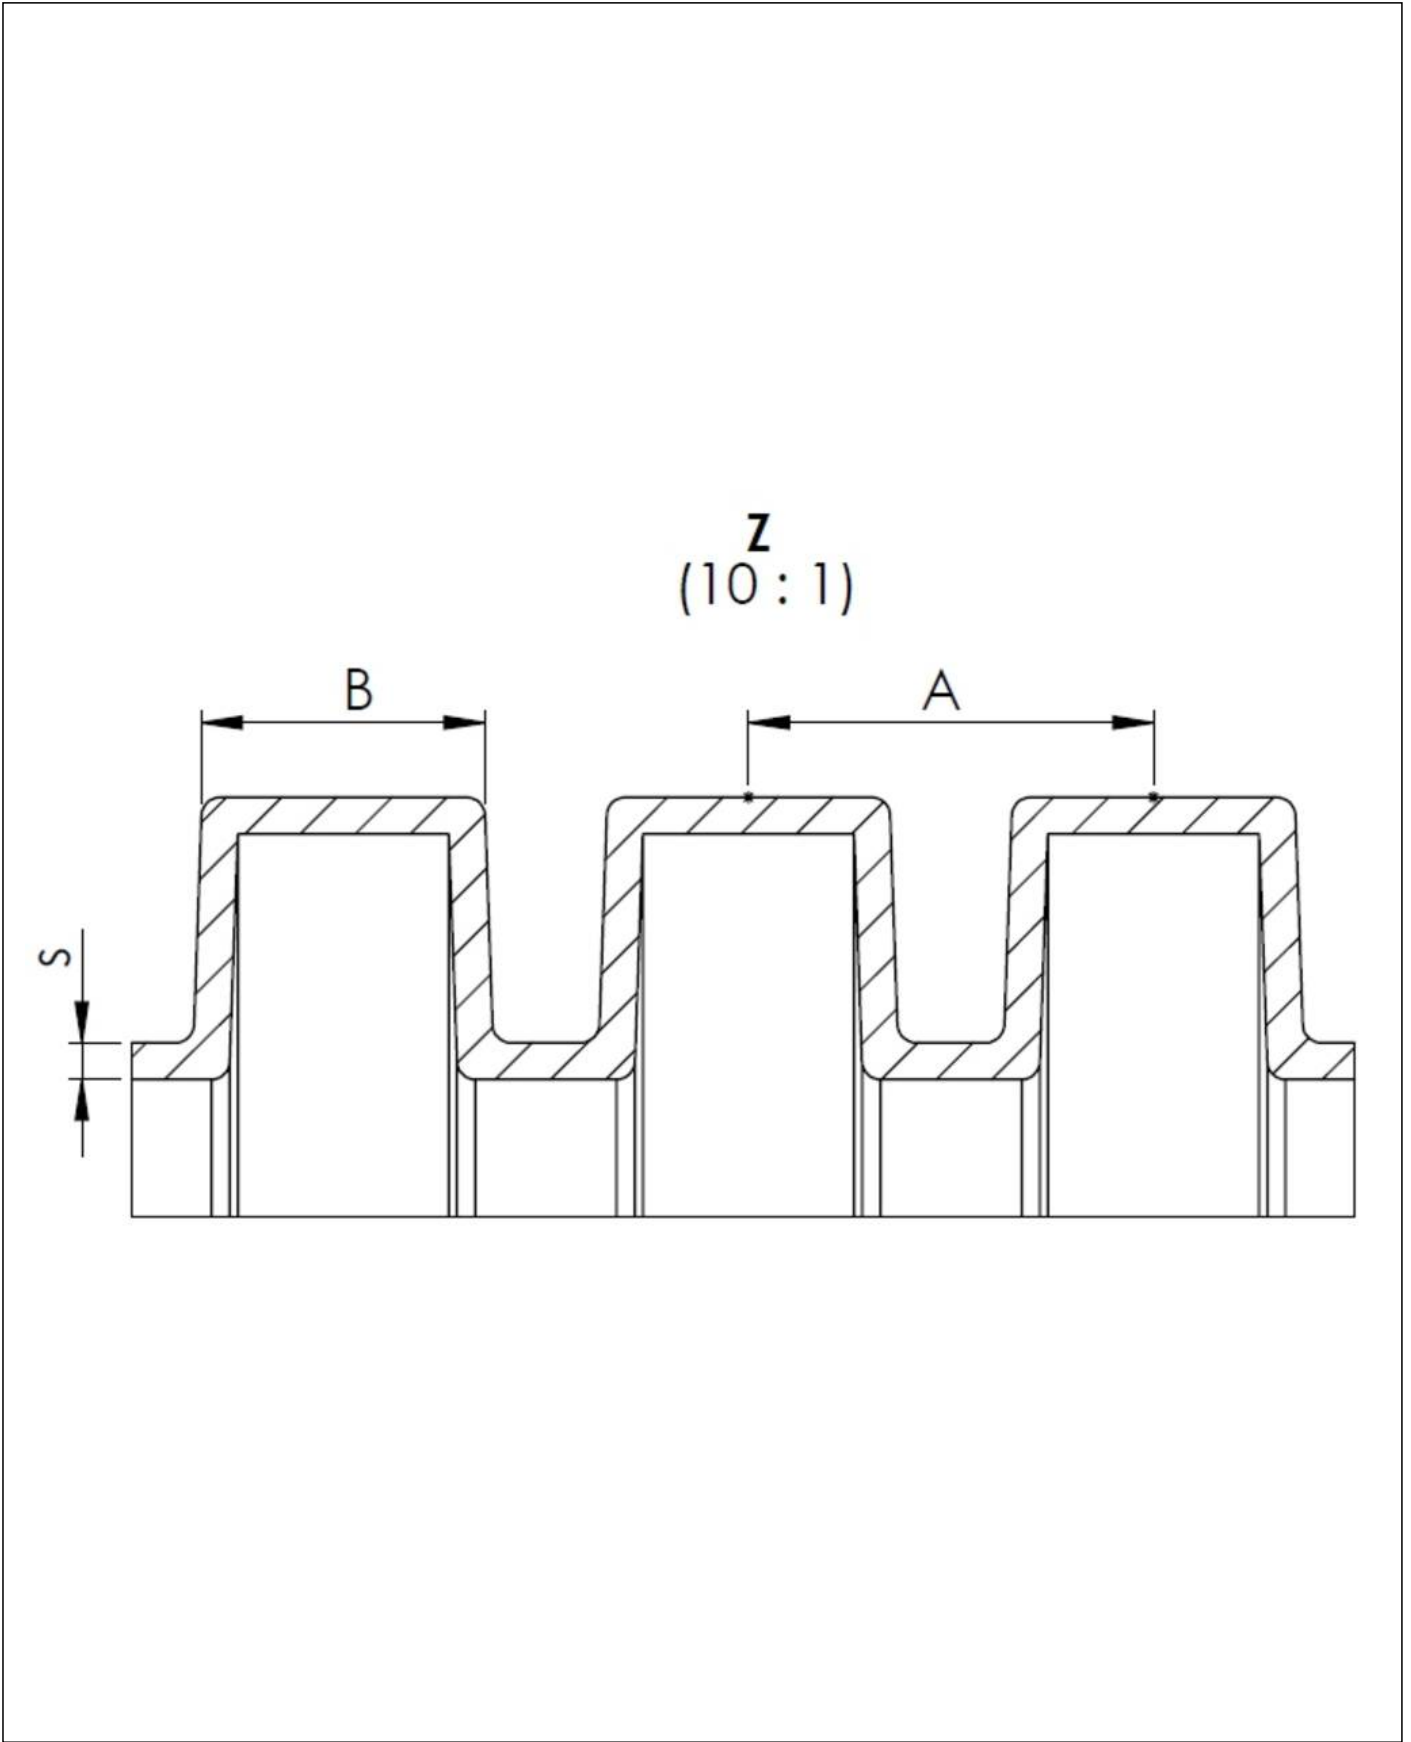

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com