


BMCG-PVC-C-12-LG

Conduit, galvanized steel, PVC coated, corrugated



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

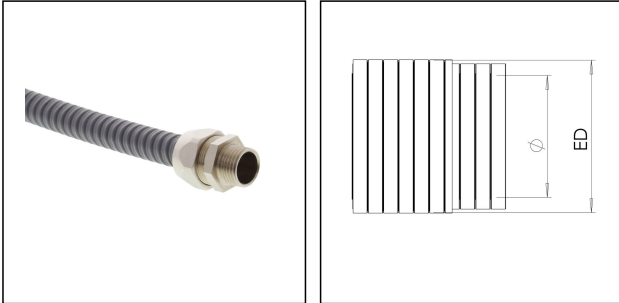

| | |
|---------------------------------------|------------------------------|
| Material | galvanized steel |
| Sheathing material 1st coating | PVC |
| Surface | corrugated |
| Product Color | RAL 7005 |
| Protection class | IP67 |
| Temp. range min | -15 °C |
| Temp. range max | 80 °C |
| Operational areas | Mechanical plant engineering |
| NW | 12 |
| External diameter ED | 15,7 mm |
| Ø inside | 12 mm |
| Bending radius R | 50 mm |
| Type | BMCG-PVC-C-12-LG |
| WISKA-Order no. | 10109016 |
| Packing unit | 30 m |
| EAN number | 4007686079265 |
| Tariff number | 83071000 |
| ETIM-Classification | EC001179 |

Recommended accessories

| | |
|-----------------------|----------|
| EMBMFS-C-12-16 | 10109092 |
| EMBMFS-C-12-20 | 10109094 |

23.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

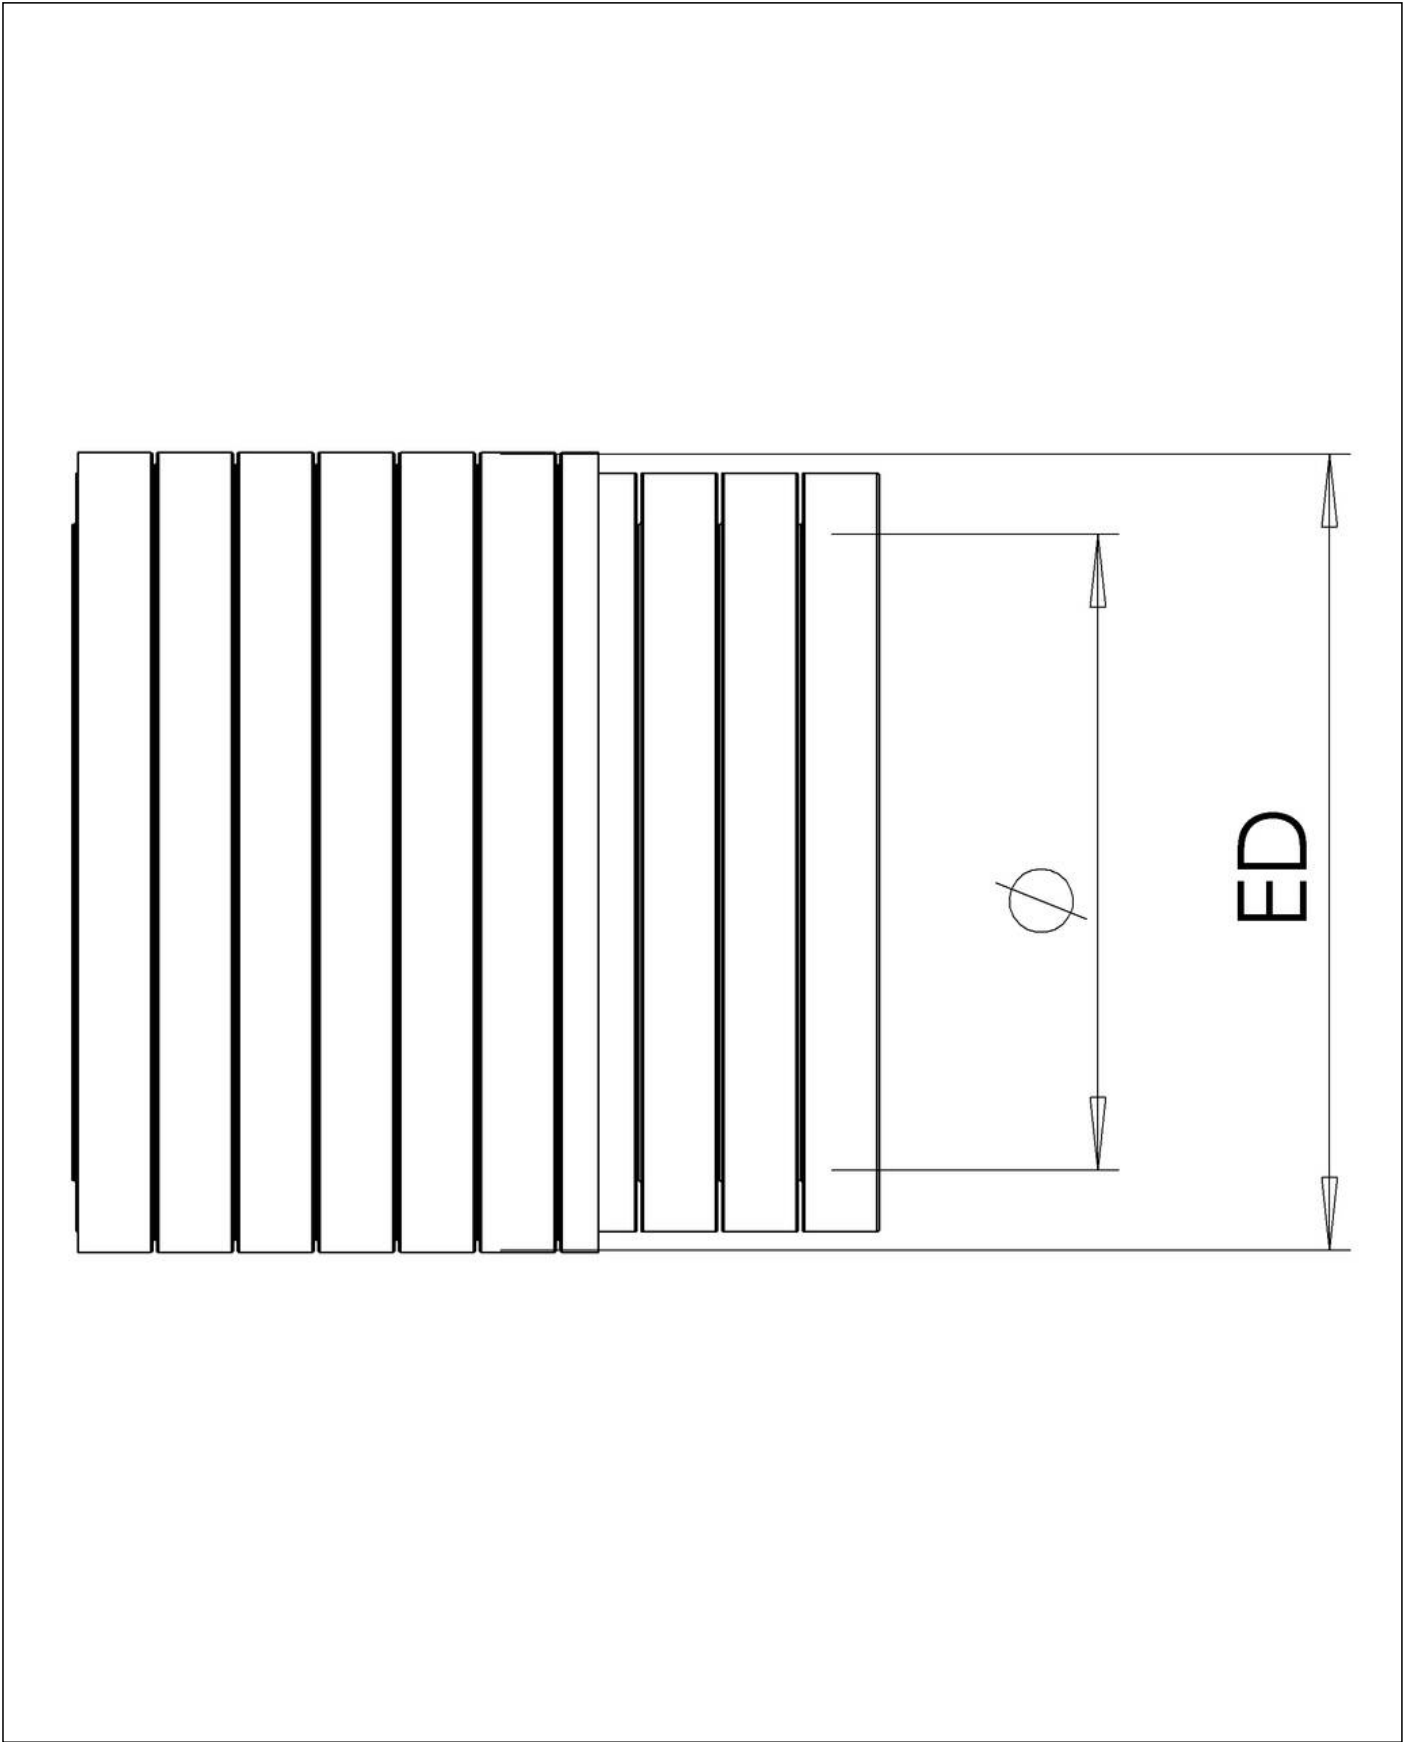

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com