


## BMCG-PVC-S-10-LG-GT

Conduit galvanized steel PVC coated greater temperature range RAL 7035 NW10



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

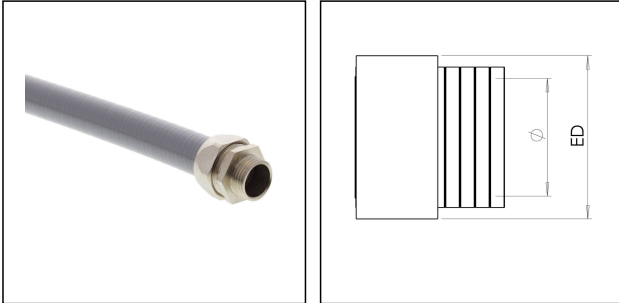

<b>Material</b>	galvanized steel
<b>Sheathing material 1st coating</b>	PVC
<b>Surface</b>	smooth
<b>Product Color</b>	RAL 7005
<b>Protection class</b>	IP67
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	105 °C
<b>Operational areas</b>	Mechanical plant engineering, Hygienic design
<b>NW</b>	10
<b>External diameter ED</b>	15,5 mm
<b>Ø inside</b>	10 mm
<b>Bending radius R</b>	50 mm
<b>Type</b>	BMCG-PVC-S-10-LG-GT
<b>WISKA-Order no.</b>	10109047
<b>Packing unit</b>	30 m
<b>EAN number</b>	4007686079852
<b>Tariff number</b>	83071000
<b>ETIM-Classification</b>	EC001179

### Recommended accessories

<b>EMBMFS-S-10-12</b>	10109087
<b>EMBMFS-S-10-16</b>	10109089

23.05.2026


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

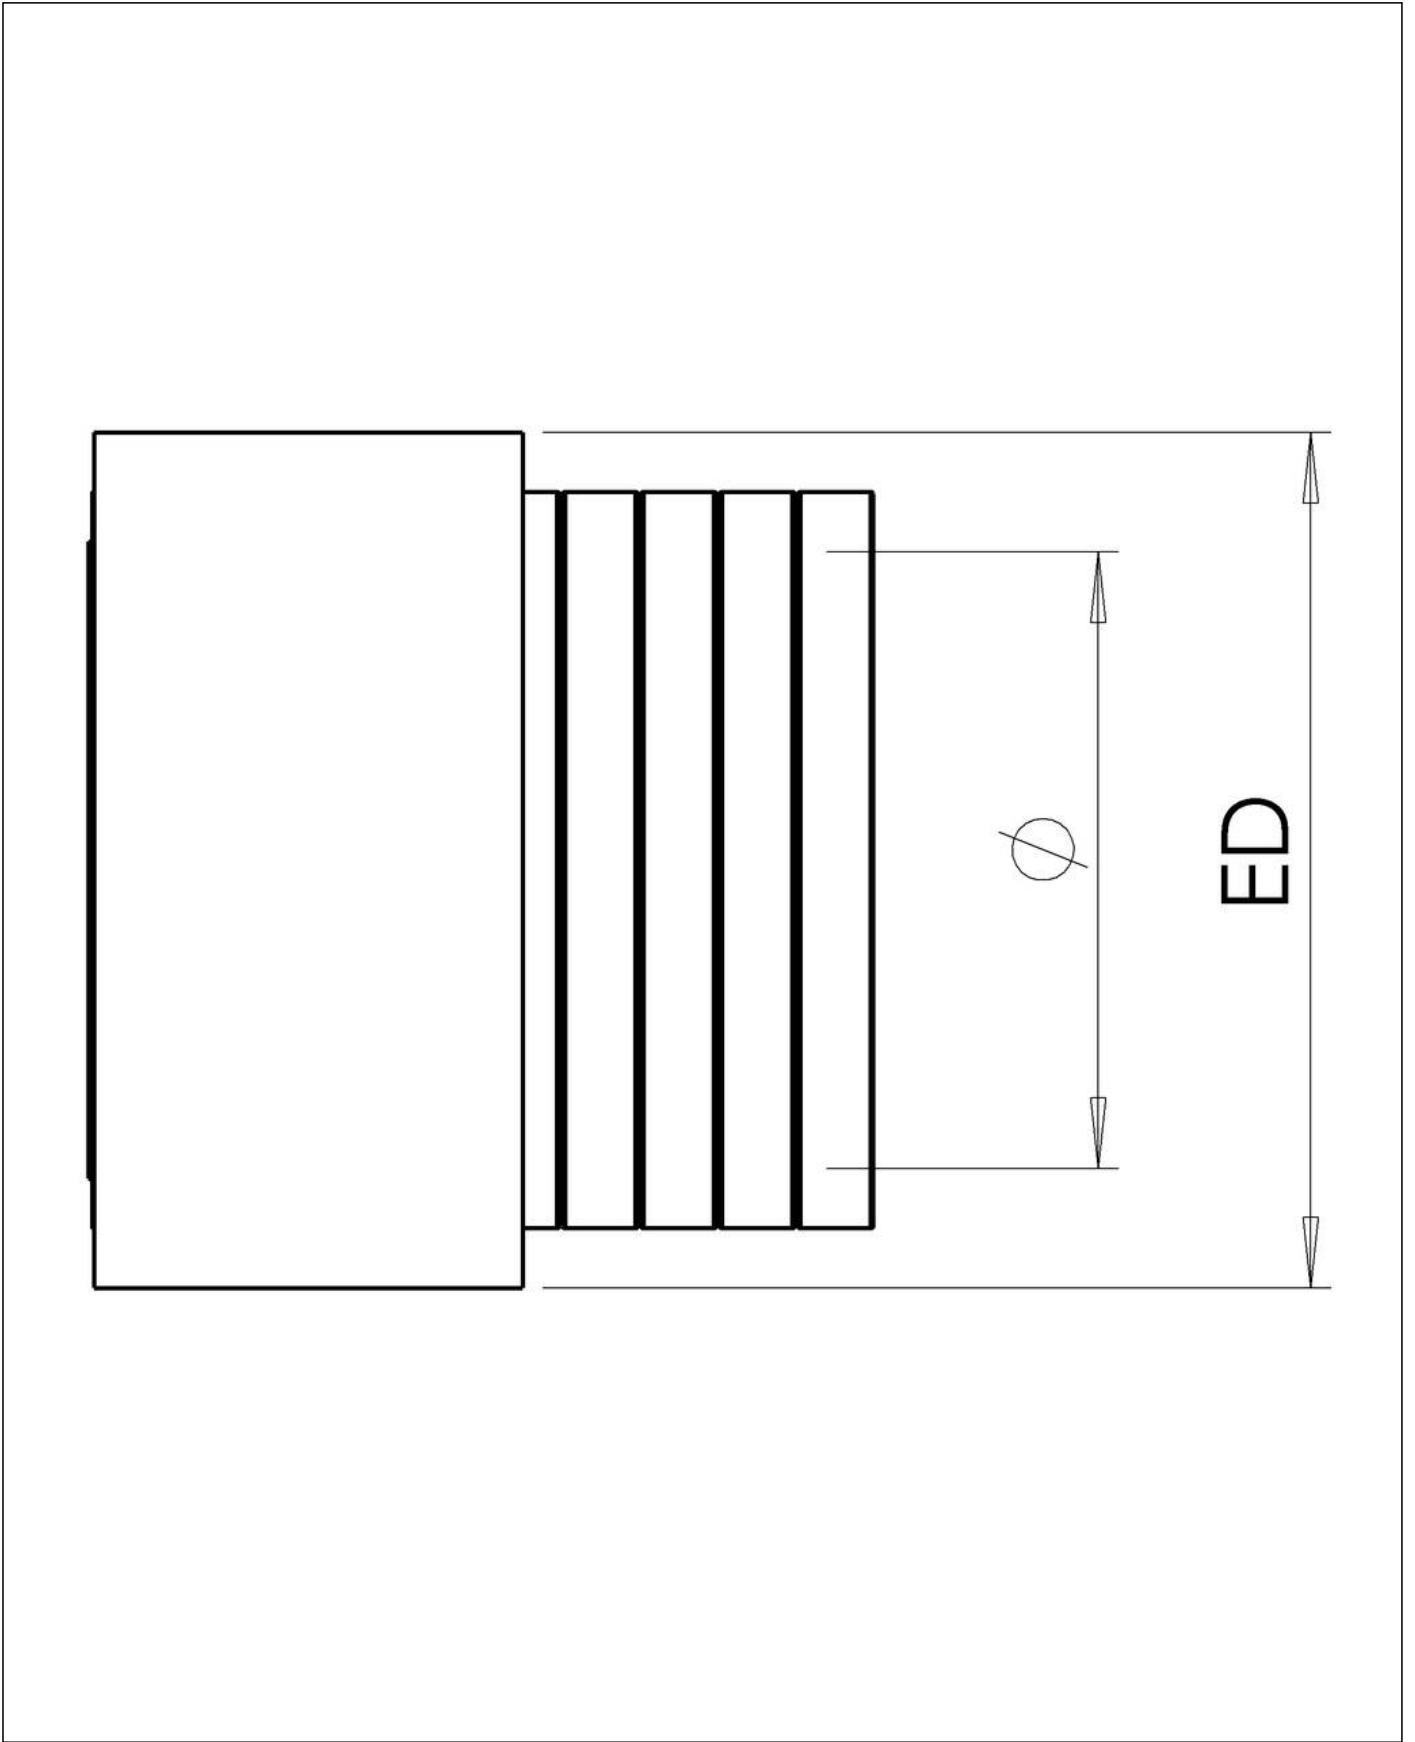

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com