


BMCG-PU-C-12-BK

Conduit, galvanized steel, PU coated, corrugated, RAL 9005, NW12



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

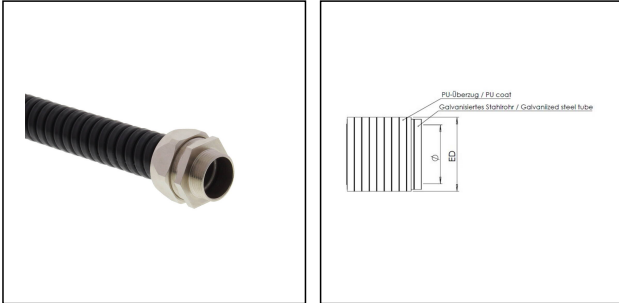

BRACE



Material	galvanized steel
Sheathing material 1st coating	PU
Surface	corrugated
Product Color	RAL 9005
Protection class	IP67
Temp. range min	-55 °C
Temp. range max	120 °C
Operational areas	EN 45545 - Railway
NW	12
External diameter ED	15,7 mm
Ø inside	12 mm
Bending radius R	50 mm
Type	BMCG-PU-C-12-BK
WISKA-Order no.	10109056
Packing unit	30 m
EAN number	4007686080032
Tariff number	83071000
ETIM-Classification	EC001179

Recommended accessories

EMBMFS-C-12-16	10109092
EMBMFS-C-12-20	10109094

23.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

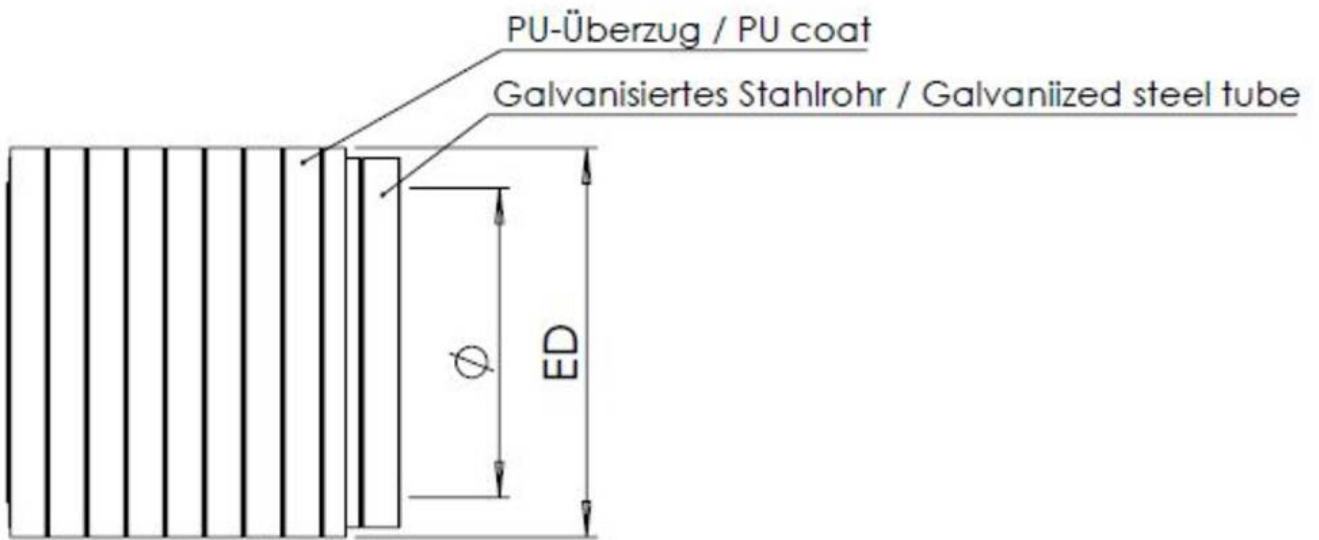

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com