


BMCG-PU-C-50-BK

Conduit, galvanized steel, PU coated, corrugated, RAL 9005, NW50

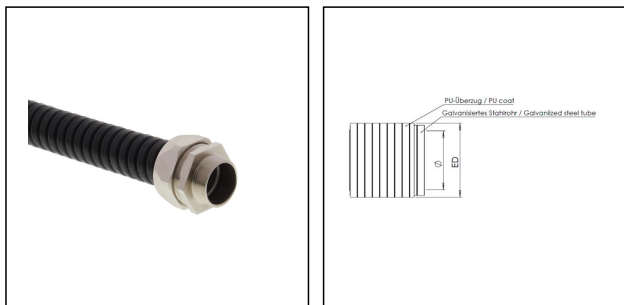

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.


BRACE


Material	galvanized steel
Sheathing material 1st coating	PU
Surface	corrugated
Product Color	RAL 9005
Protection class	IP67
Temp. range min	-55 °C
Temp. range max	120 °C
Operational areas	EN 45545 - Railway
NW	50
External diameter ED	56 mm
Ø inside	50,5 mm
Bending radius R	200 mm
Type	BMCG-PU-C-50-BK
WISKA-Order no.	10109062
Packing unit	25 m
EAN number	4007686080155
Tariff number	83071000
ETIM-Classification	EC001179

Recommended accessories

EMBMFS-C-50-50	10109118
EMBMFS-C-50-63	10109120

28.07.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

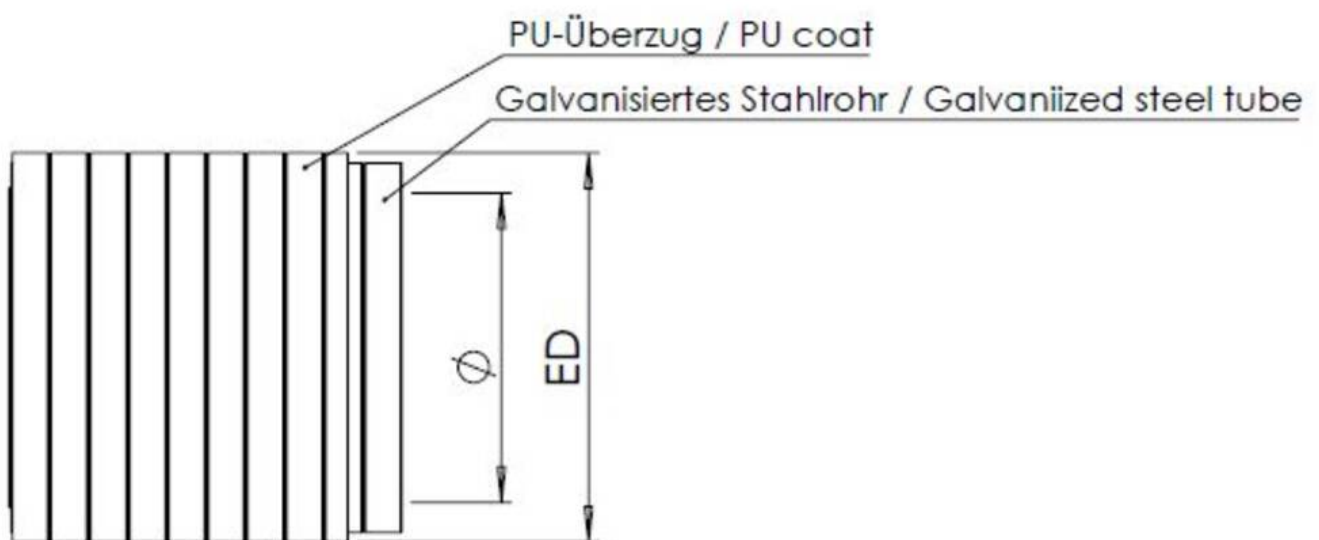

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice