


BMCG-PU-C-40-LG

Conduit, galvanized steel, PU coated, corrugated, RAL 7035, NW40



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

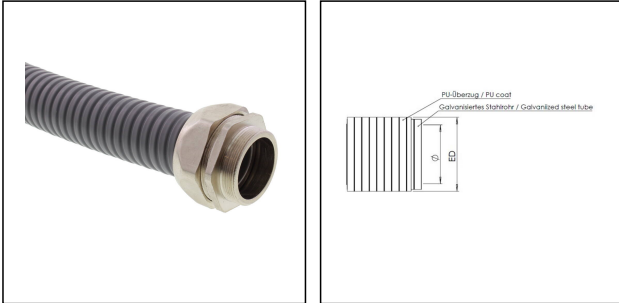

BRACE



Material	galvanized steel
Sheathing material 1st coating	PU
Surface	corrugated
Product Color	RAL 7005
Protection class	IP67
Temp. range min	-55 °C
Temp. range max	120 °C
Operational areas	EN 45545 - Railway
NW	40
External diameter ED	45 mm
Ø inside	39,5 mm
Bending radius R	160 mm
Type	BMCG-PU-C-40-LG
WISKA-Order no.	10109077
Packing unit	25 m
EAN number	4007686080438
Tariff number	83071000
ETIM-Classification	EC001179

Recommended accessories

EMBMFS-C-40-40	10109114
EMBMFS-C-40-50	10109116

23.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

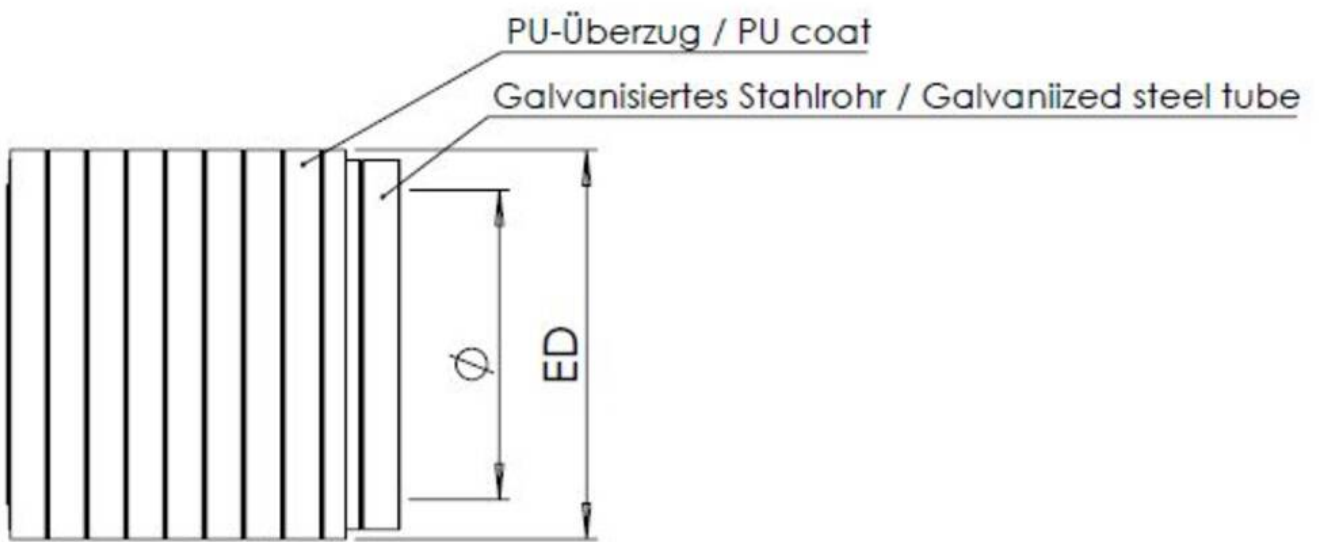

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com