


PushIn Mobile Extension 32A/25kA

Swichable extension for reefer sockets 25m 32A 25kA, stainless steel RAL 9016



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

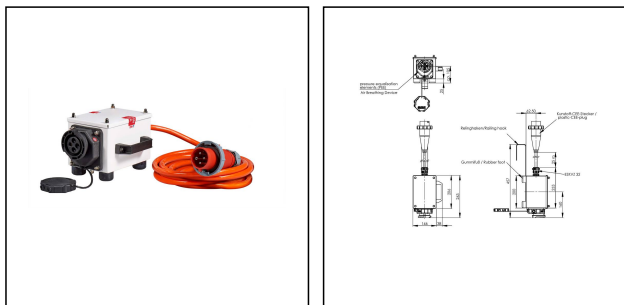

WISKA-Order no.

10109289

Type	PushIn Mobile Extension 32A/25kA
Material	Stainless steel 1.4301 (V2A)
Material protective cap	Polyamide
Socket insert	3 - poles + PE
Number of sockets	1
Clock face position	3h
Breaking capacity	25 kA
Voltage max. (V)	440 V
Type of Voltage	AC
Current	32 A
Protection class	IP56 / IP67
Operational areas	Outdoor
Temp. range min	-25 °C
Temp. range max	45 °C
Type of cable gland	M 32 x 1,5
Mounting	Surface mounting
External dimensions LxWxH	297x251x168mm
Colour	RAL 9016

Remarks:

- with mounting fixture set
- cable length: 25m ROFLEX 4G 6mm² orange
- Function check: LED
- Long-life: VentPLUG venting devices to avoid condensation water
- Carrier handle for transport

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Spare parts

SP-BC/FS-CEE/BELT/32A	22000403
SP-VARI-PI/SM/LED/DAE/25kA	22000717

11.08.2026

Your Contact:


WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

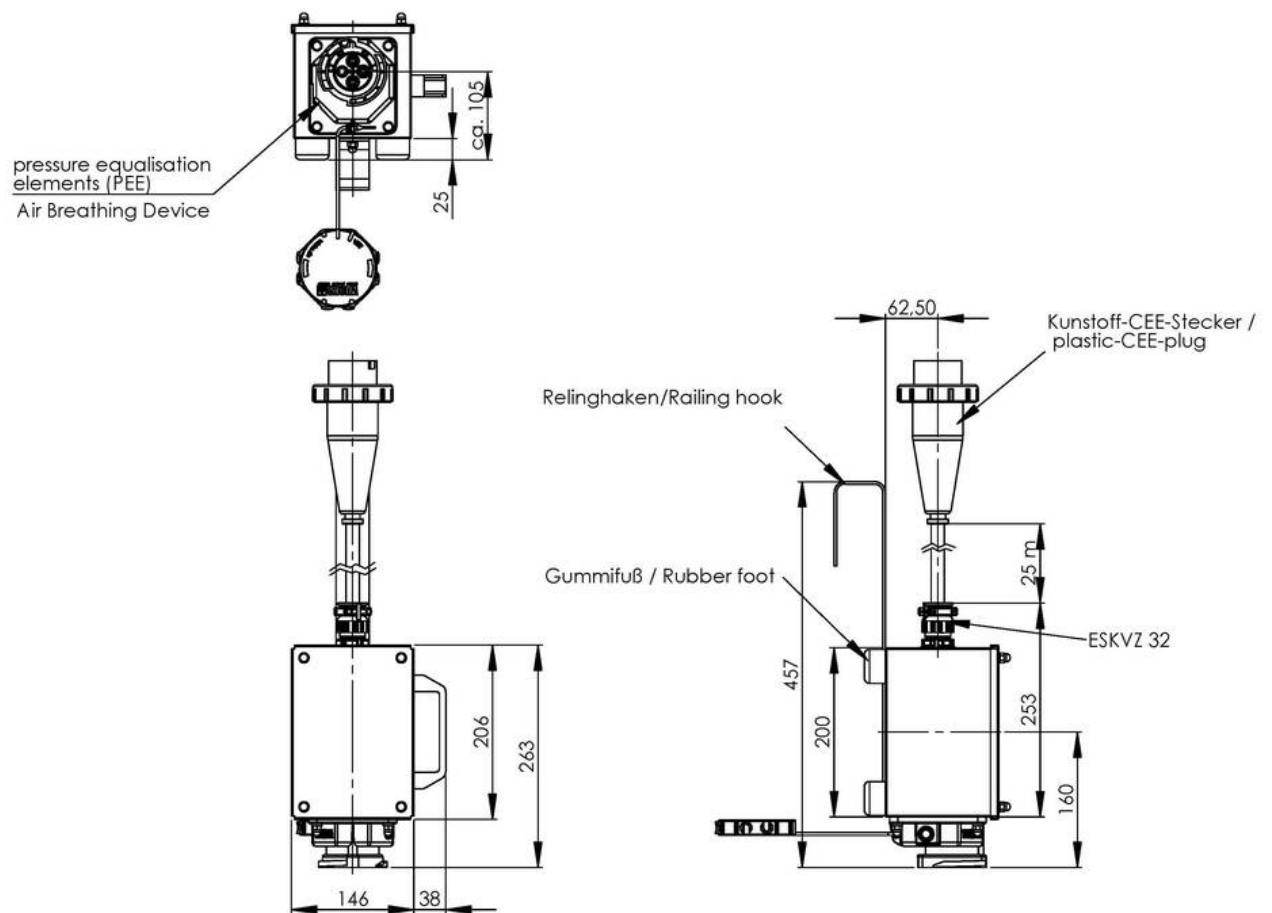

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com