

## BCI-S-29-BK

Conduit PA12 UL94-V1, RAL 9005, NW29



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



<b>Material</b>	WISKAmid PA12 V1 RW
<b>Temp. range min</b>	-50 °C
<b>Temp. range max</b>	120 °C
<b>Operational areas</b>	EN 45545 - Railway
<b>Product Color</b>	RAL 9005
<b>NW</b>	29
<b>External diameter ED</b>	34,5 mm
<b>Ø inside</b>	28,9 mm
<b>Profile width A</b>	3,4 mm
<b>Width B</b>	3,4 mm
<b>Bending radius R</b>	67 mm
<b>Wall thickness S</b>	0,4 mm
<b>Model</b>	Standard profile
<b>Type</b>	BCI-S-29-BK
<b>Order no. RAL 9005</b>	10109953
<b>Packing unit</b>	25 m
<b>EAN number</b>	4007686105100
<b>Tariff number</b>	39173900
<b>ETIM-Classification</b>	EC001177

12.05.2026


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

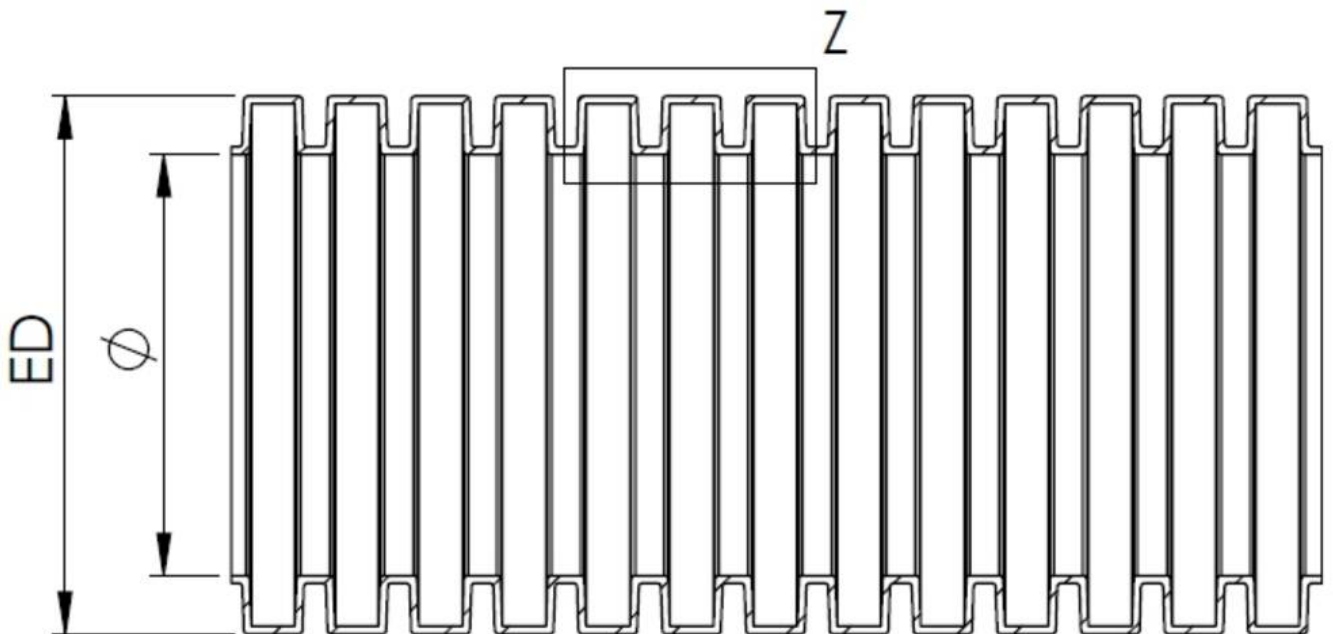


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

✉ contact@wiska.de · 🌐 www.wiska.com

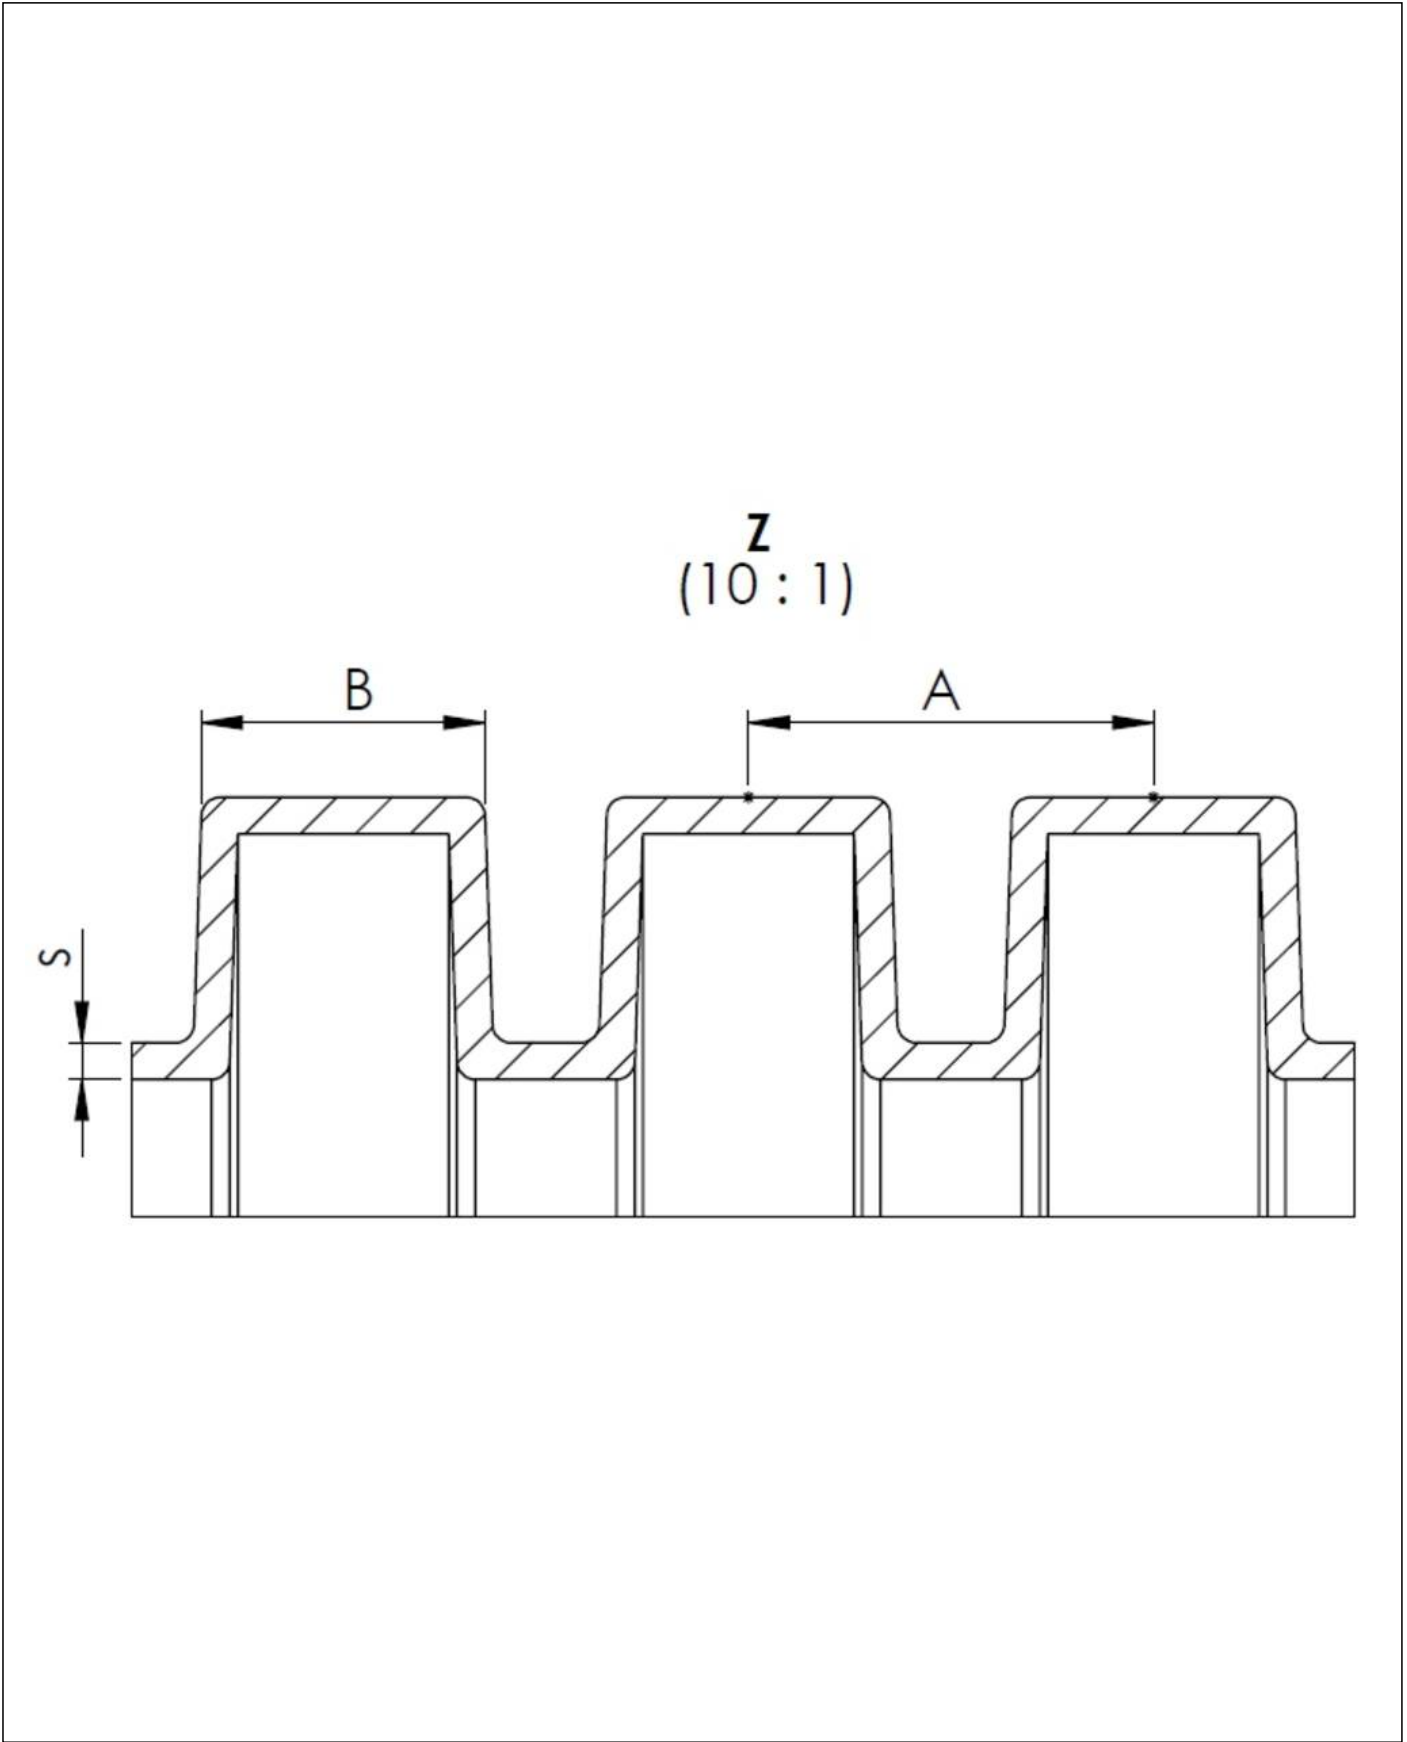

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com