


5000-4x40W-MV-WB-FN-1AA-G02

LED Floodlight 4x40W 100-240V stainless steel IP66/67



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

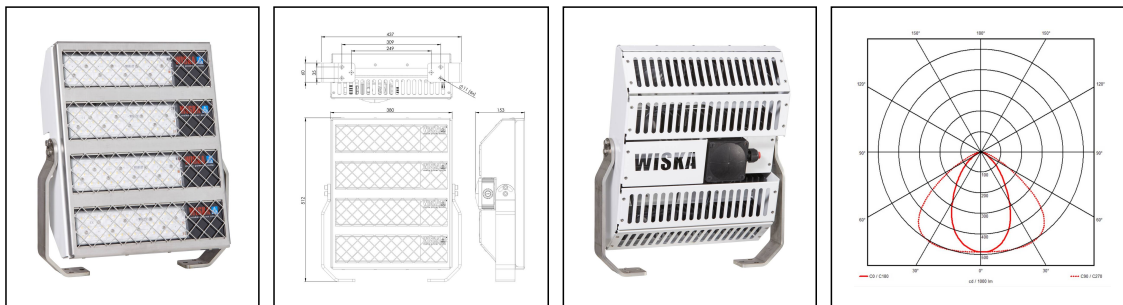

WISKA-Order no.	10110462
Type	5000-4x40W-MV-WB-FN-1AA-G02
Material	Plastic, Stainless steel
Wattage	160 W
Power[^]	4 x 40 W
Voltage	230 V
Voltage min. (V)	100 V
Voltage max. (V)	240 V
Type of Voltage	AC
Frequency	50/60 Hz
Protection class	IP66 / IP67
Temp. range min	-30 °C
Temp. range max	55 °C
Operational areas	Indoor / Outdoor
Mounting	Wall, Ceiling, Upside
Reflector	Wide beam
Lightsource	LED
Lightsource incl.	Yes
Luminous flux	16000 lm
Colour temperature	5600 K
Colour rendering index	≥ 80
Rated Lifetime	L70/B10 @Ta +45 °C
System Lifetime	120000 h
Type of cable gland	ESKV 25 / 9-17mm
Material cable gland	Polyamide

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Using for cable gland 	
Ø cable diameter min	9 mm
Ø cable diameter max	17 mm
External dimensions LxWxH	437x512x153mm
Equipment	Guard
Weight	18,62 kg

Remarks:

wide beam,
seawater resistant module housing
made of special heat conducting plastic,
stainless steel frame, back cover
and mounting bracket,
back cover white powder coated,
connection box COMBI 407,
1 cable gland ESKV25
for cable 9-17mm in diameter
2x3-pole terminal max. 4mm²
mounted hit grid


Spare parts

SP-5000 LED Light Engine WB 0,35m cable	22001206
---	----------

28.07.2026

Your Contact:

WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
 +49-4191-508-0 ·  +49-4191-508-209
contact@wiska.de · www.wiska.com

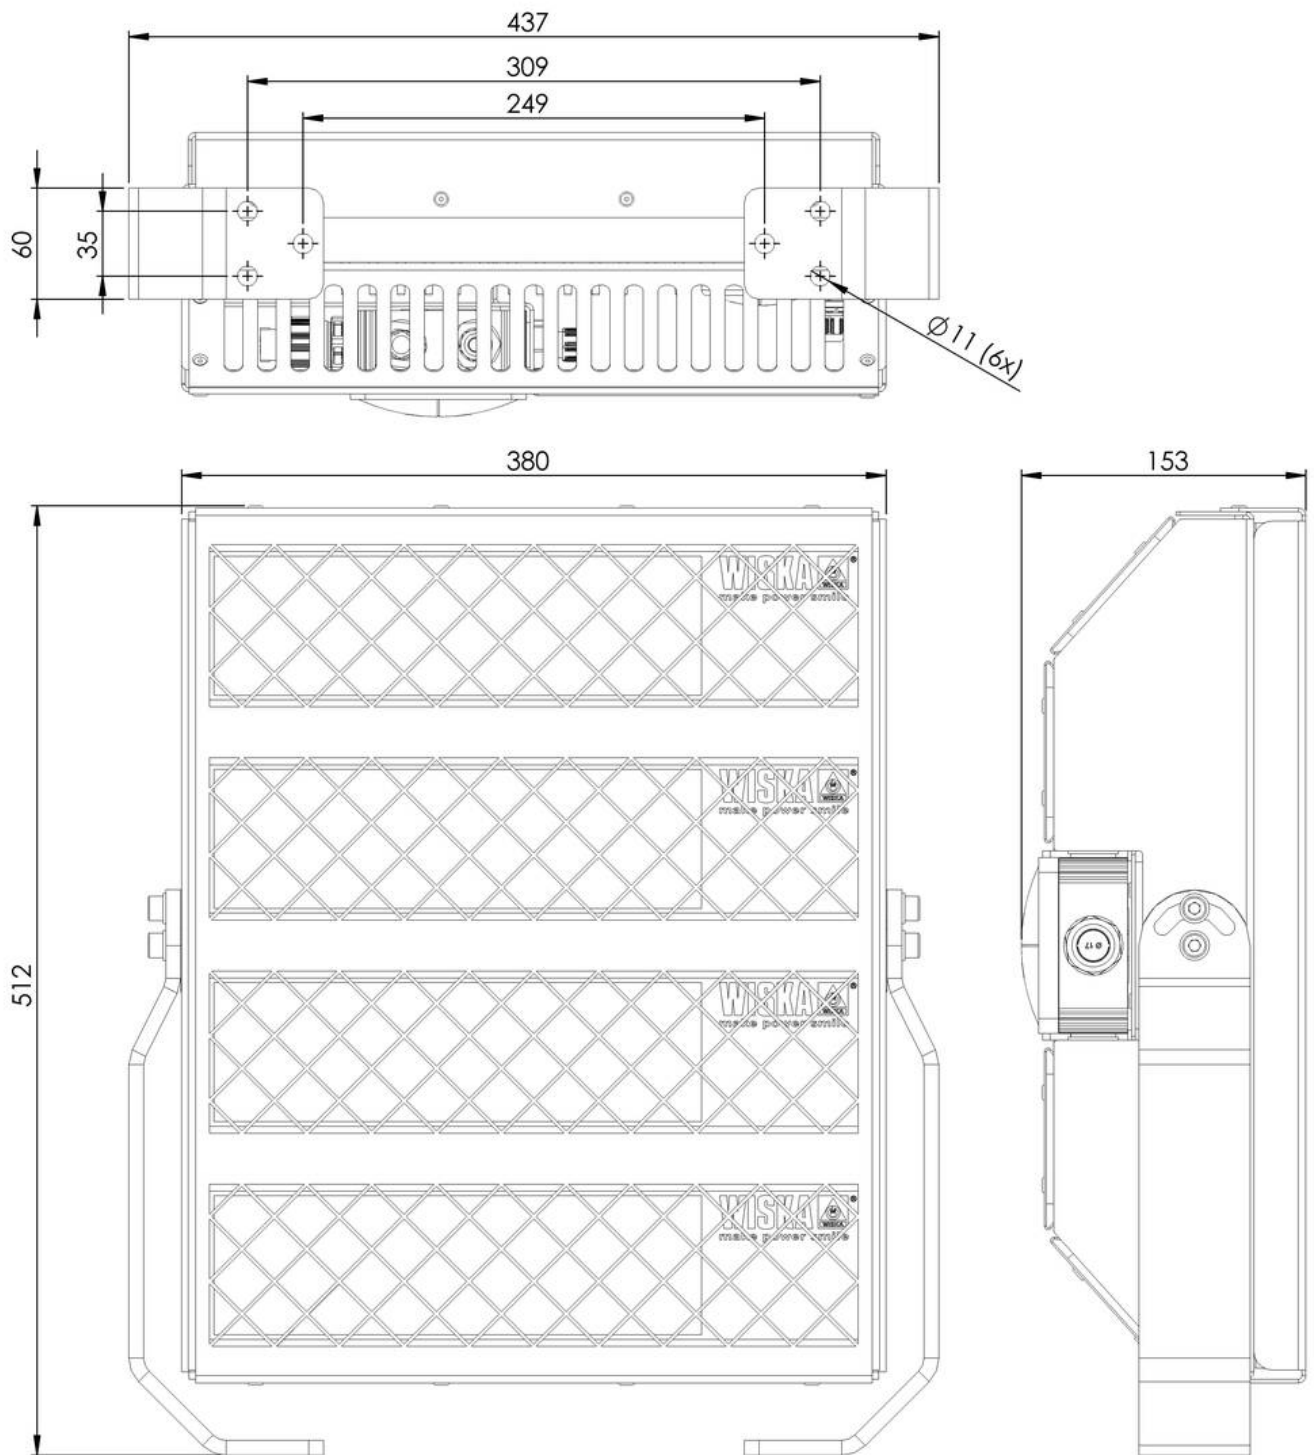


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

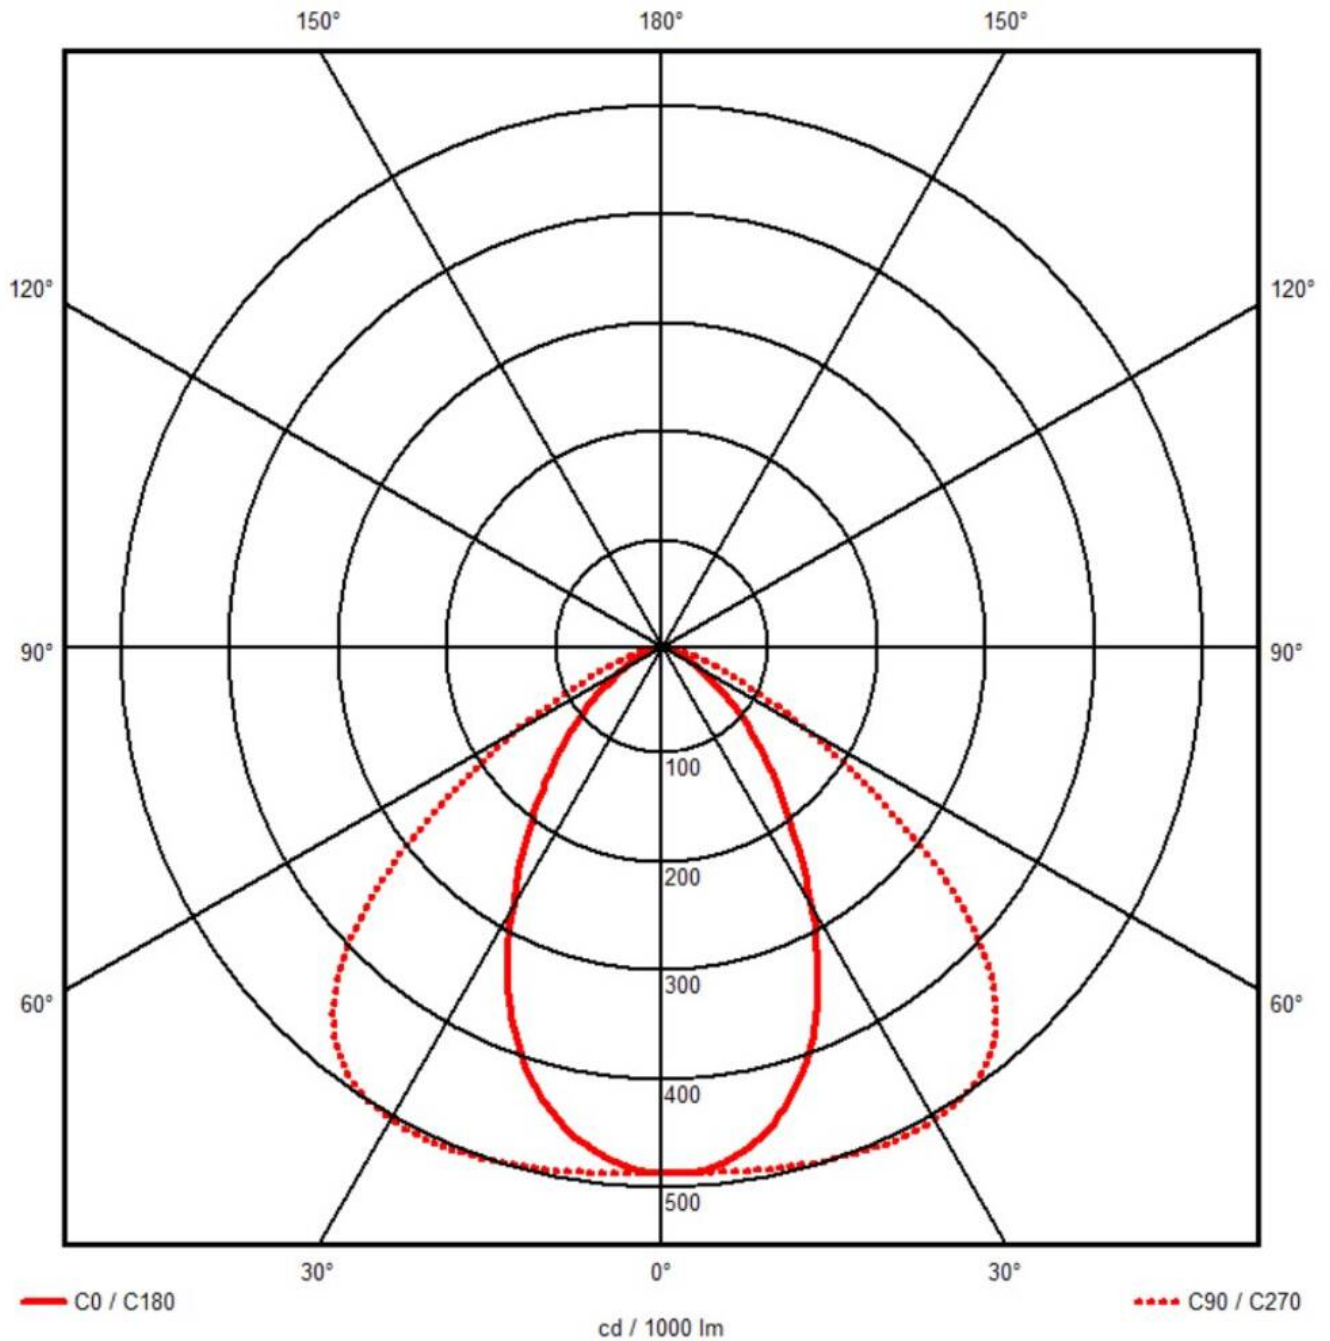

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice