


5000-1x40W-MV-MB-FN-1CC-G02

LED Floodlight 1x40W 100-240V stainless steel



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

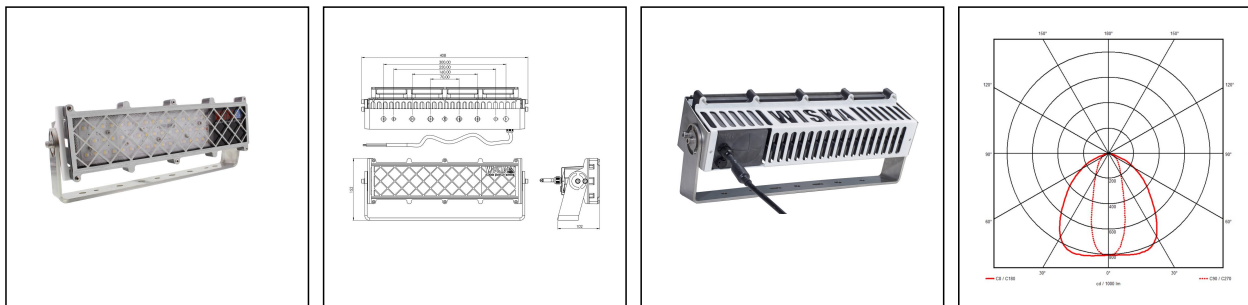

WISKA-Order no.	10110598
Type	5000-1x40W-MV-MB-FN-1CC-G02
Material	Plastic, Stainless steel
Wattage	40 W
Power[^]	1 x 40 W
Voltage	230 V
Voltage min. (V)	100 V
Voltage max. (V)	240 V
Type of Voltage	AC
Frequency	50/60 Hz
Protection class	IP66 / IP68
Temp. range min	-30 °C
Temp. range max	55 °C
Operational areas	Indoor / Outdoor
Mounting	Ceiling, Upside, Wall
Reflector	Medium beam
Lightsource	LED
Lightsource incl.	Yes
Luminous flux	4000 lm
Colour temperature	5600 K
Colour rendering index	≥ 80
Rated Lifetime	L70/B10 @Ta +45 °C
System Lifetime	120000 h
Using for cable gland	
External dimensions LxWxH	408x152x102mm

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Equipment	Guard
Weight	5 kg

Remarks:

medium beam,
seawater resistant module housing
made of special heat conducting plastic,
stainless steel frame, back cover and mounting bracket,
back cover white powder coated,
1,5m connection cable 3x0,75mm² outer Ø 6,8mm
mounted hit grid

Spare parts

SP-5000 LED Light Engine MB 1,5m cable	22001008
---	----------

28.07.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

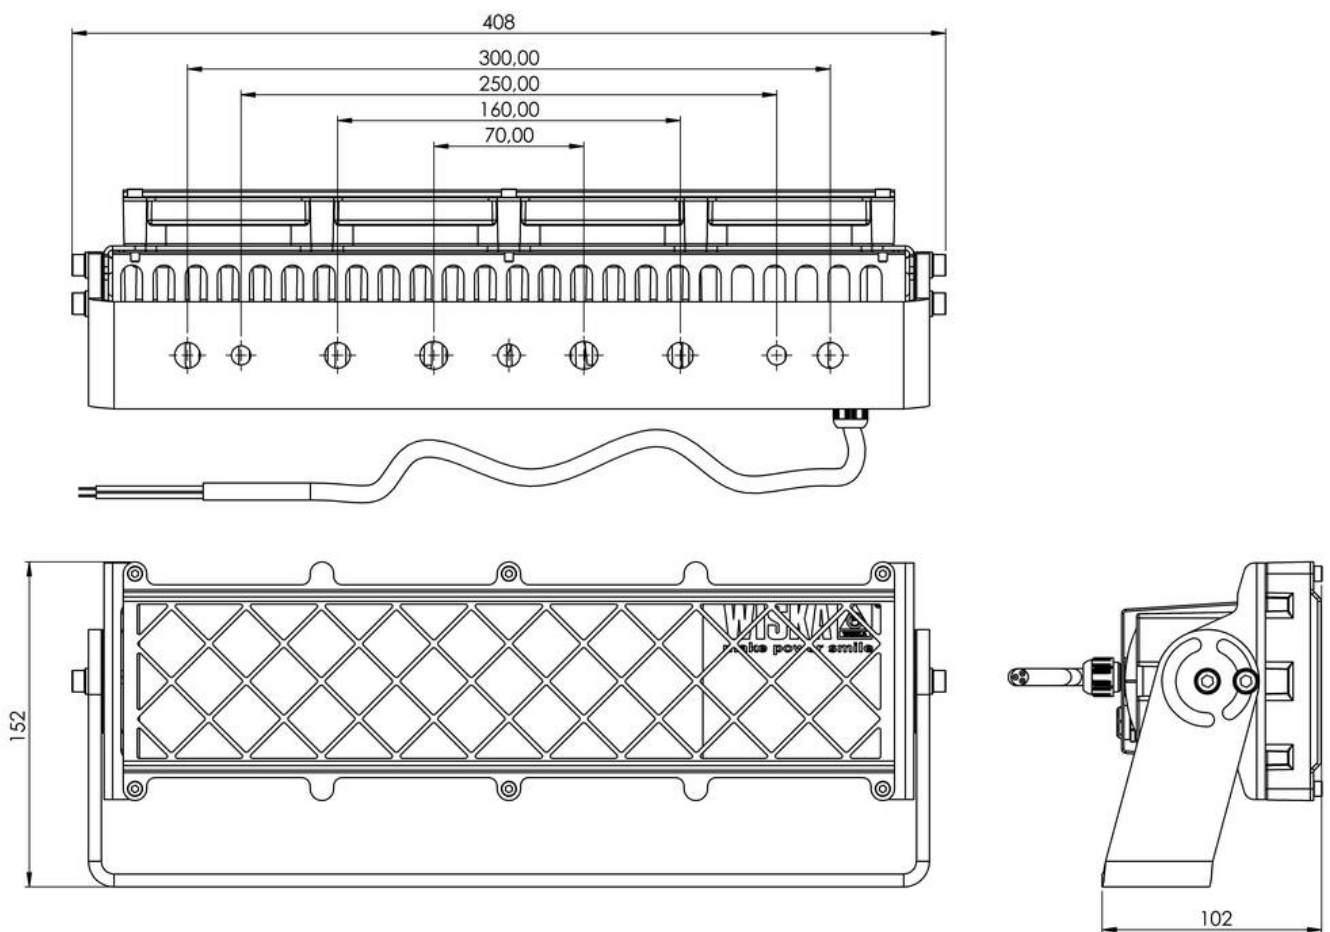

Your Contact:


WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

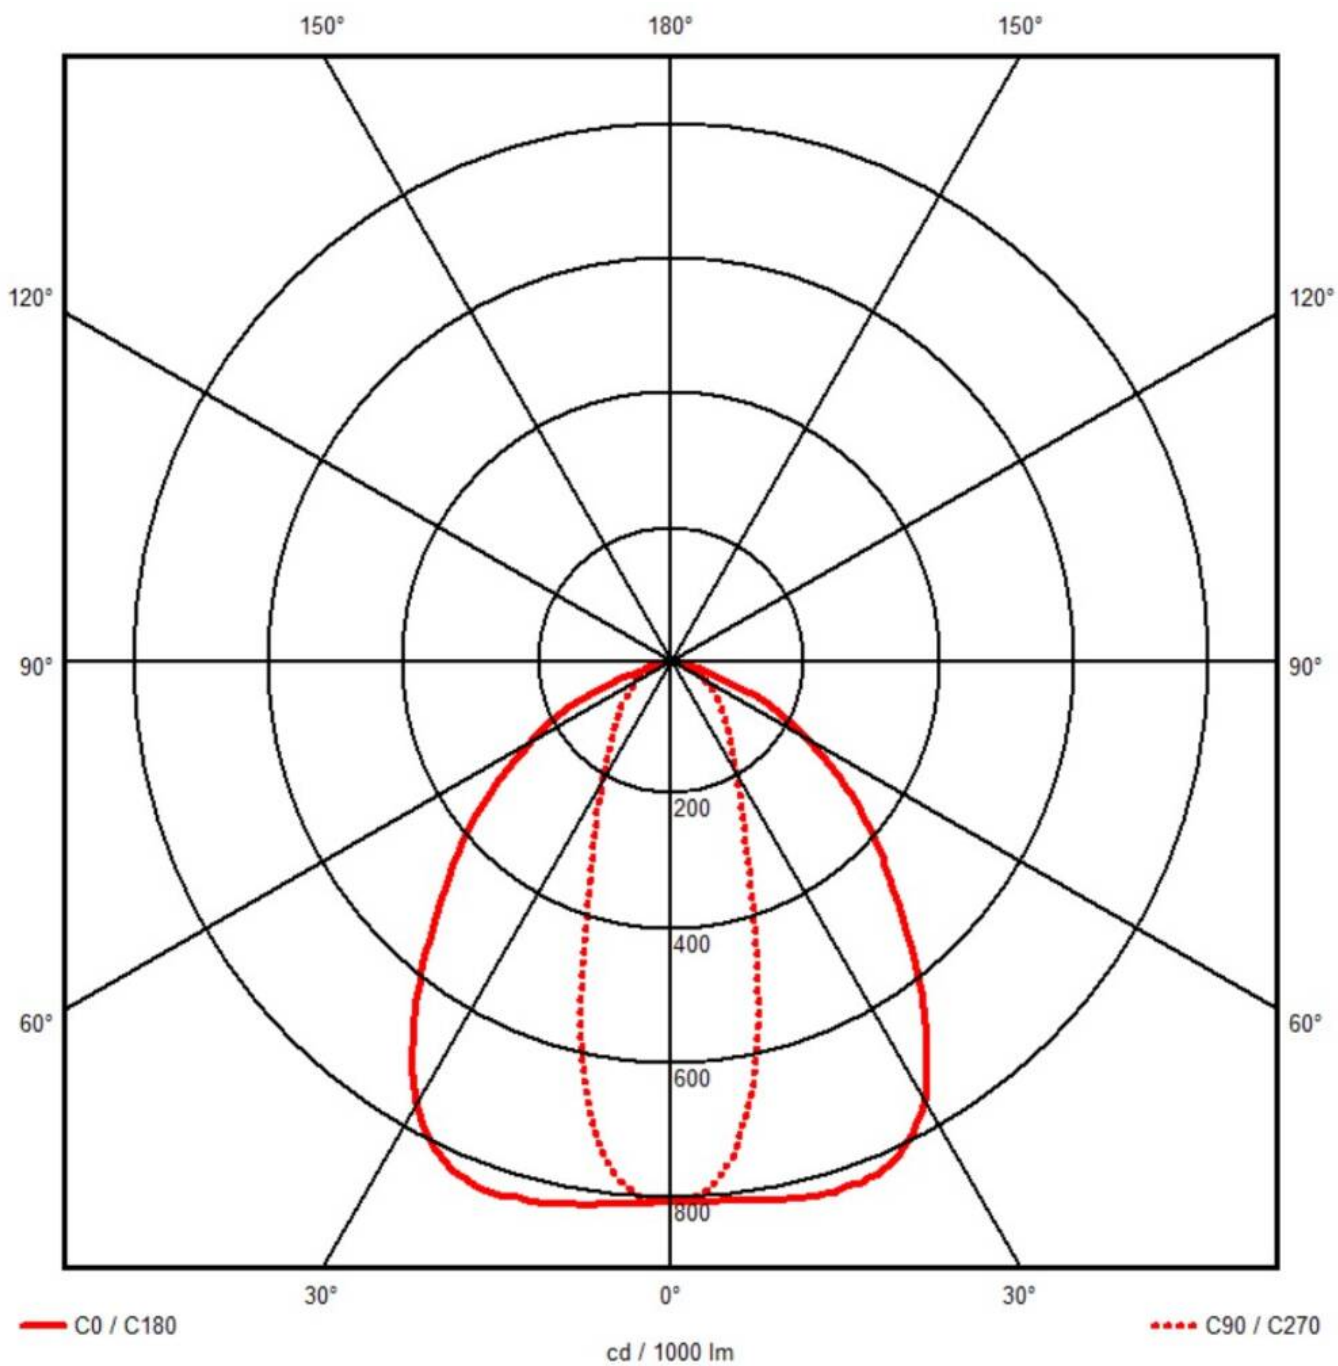

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice