


5200-2x40W-MV-MB-1AA-G02

Ex-LED Floodlight 5200, IP66/IP67



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

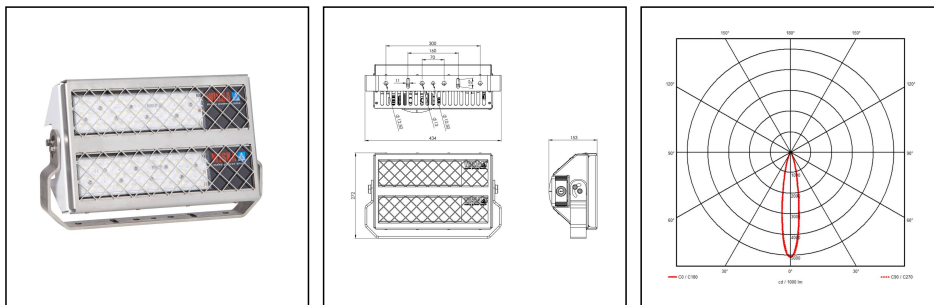

WISKA-Order no.

10112356

Type	5200-2x40W-MV-MB-1AA-G02
Material	Stainless steel, Plastic
Wattage	80 W
Power [^]	2 x 40 W
Voltage	230 V
Voltage min. (V)	100 V
Voltage max. (V)	240 V
Type of Voltage	AC
Frequency	50/60 Hz
Protection class	IP66 / IP67
Temp. range min	-30 °C
Temp. range max	55 °C
Operational areas	Indoor / Outdoor
Mounting	Wall, Ceiling, Upside
Approval	IECEx EPS 22.0096X, EPS 23 ATEX 1 151 X
Explosion Groups	IIC
Temp.-class	T4
Zone	22, 2
Reflector	Medium beam
Lightsource	LED
Lightsource incl.	Yes
Luminous flux	8000 lm
Colour temperature	5600 K
Colour rendering index	≥ 80

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Rated Lifetime	L70/B10 @Ta +45 °C
System Lifetime	120000 h
Type of cable gland	ESKV 25 / 9-17mm
Material cable gland	Polyamide
Using for cable gland	
Ø cable diameter min	9 mm
Ø cable diameter max	17 mm
External dimensions LxWxH	434x272x153mm
Equipment	Guard
Weight	12,7 kg
Tariff number	94054990

11.08.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

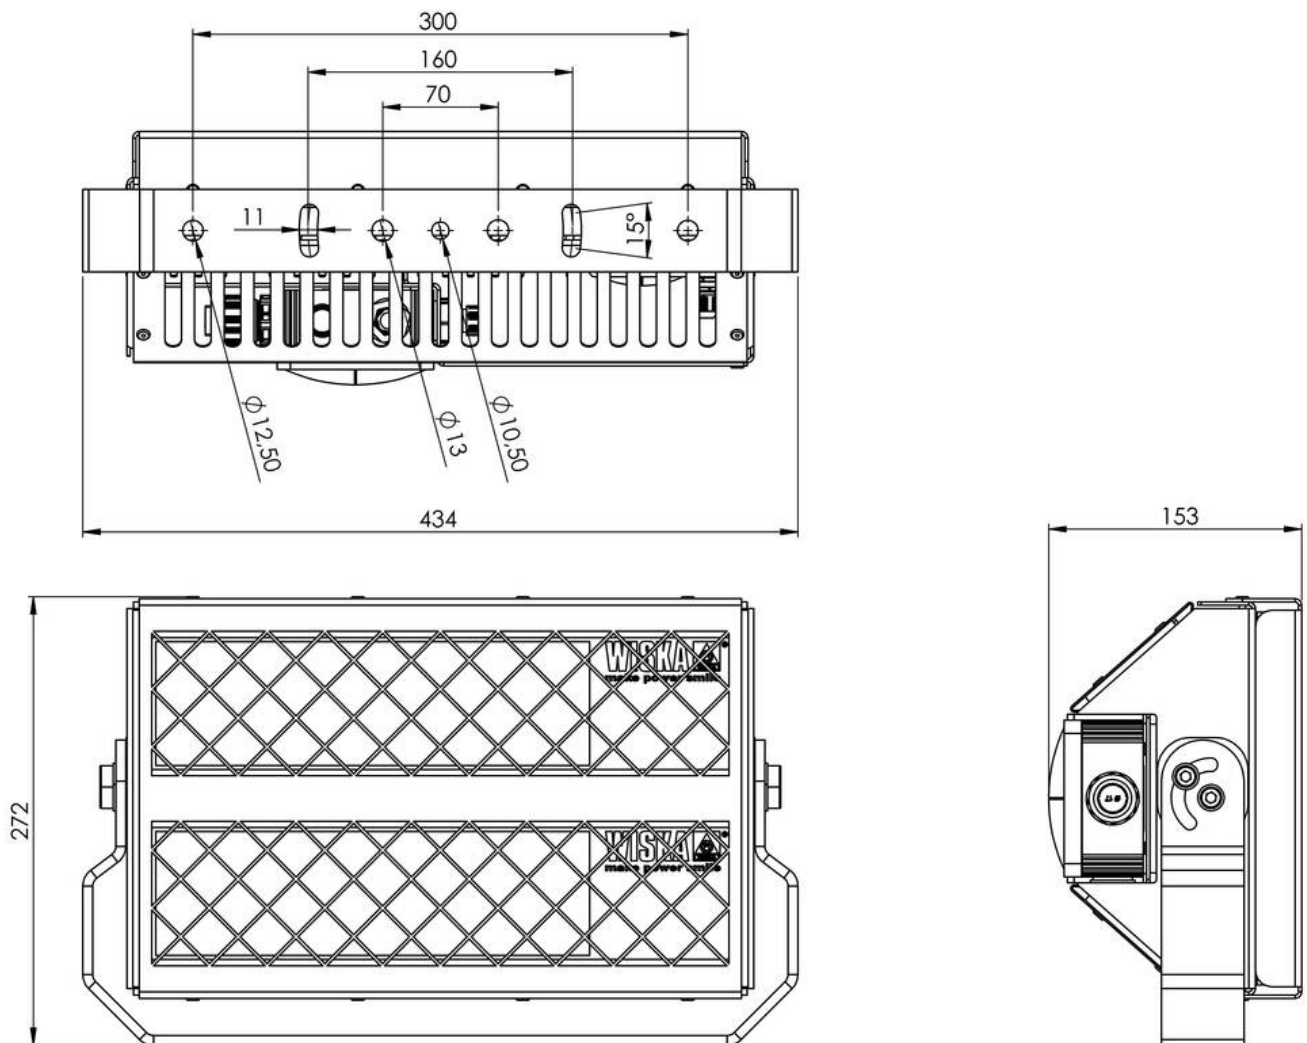

Your Contact:


WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

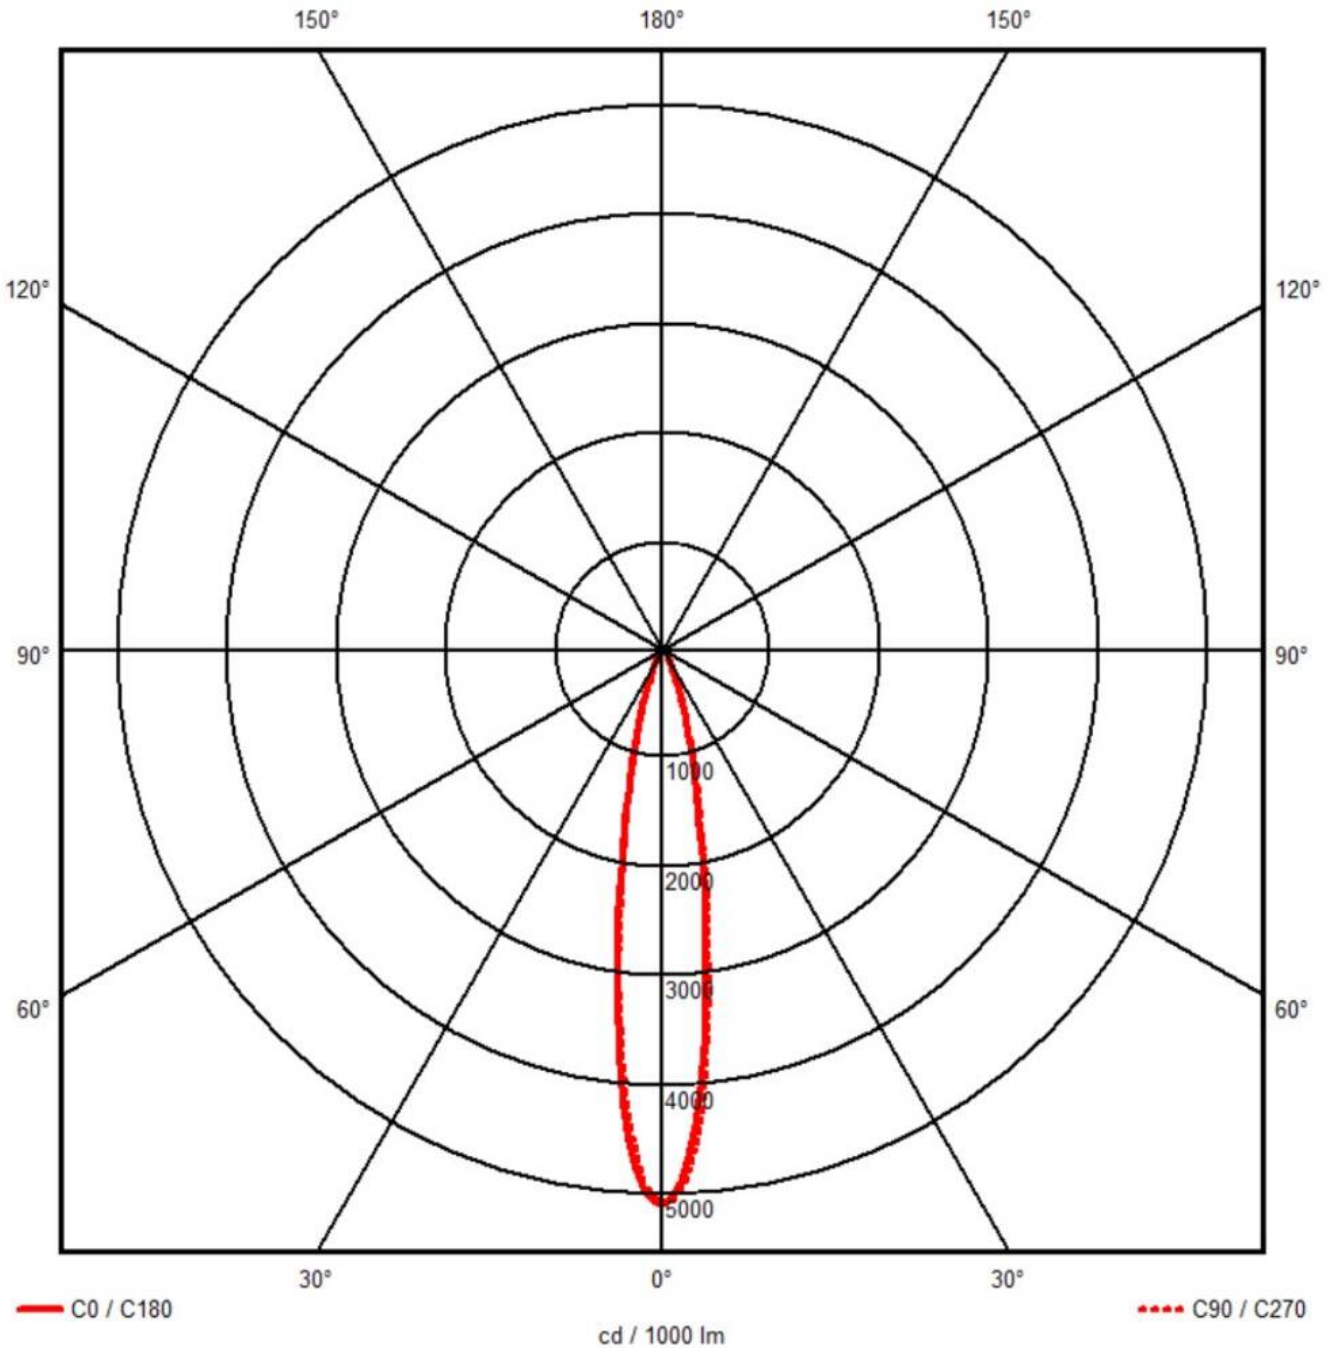

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice