


4000-2x13-230-2-CC-LE



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

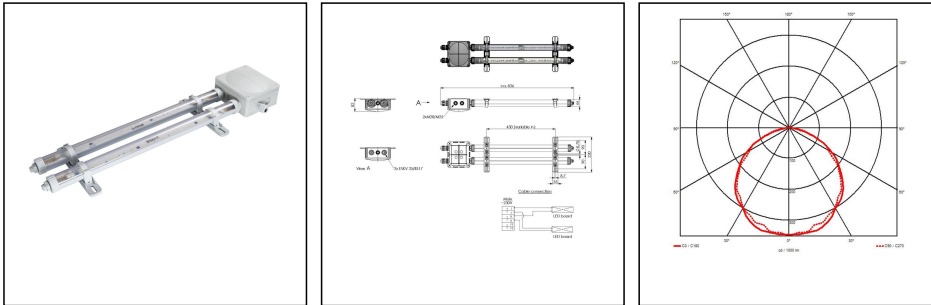

WISKA-Order no.	10112832
Type	4000-2x13-230-2-CC-LE
Material	Polycarbonate
Globe colour	Clear
Wattage	26 W
Power^	2 x 13 W
Voltage	230 V
Protection class	IP66 / IP67
Type of Voltage	AC
Frequence	50/60 Hz
Connection	connection box 1210
Operational areas	Outdoor, Engine room, Cargo hold
Temp. range min	-30 °C
Temp. range max	55 °C
Lightsource	LED
Lightsource incl.	Yes
Colour temperature	5600 K
Luminous flux	2800 lm
Colour rendering index	CRI > 80
Ø cable diameter min	9 mm
Ø cable diameter max	17 mm
Rated Lifetime	L70/B50 @Ta +35 °C
System Lifetime	100000 h
Mounting	Ceiling, Wall, Surface mounting
Material cable gland	Polyamide

Your Contact:

WISKA Hoppmann GmbH
 Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
 ☎ +49-4191-508-0 · 📠 +49-4191-508-209
 contact@wiska.de · www.wiska.com

Colour	RAL 7035
External dimensions LxWxH	791x220x83mm
Approval	RMRS, DNV-GL
Weight	1,2 kg

Remarks:

Connection box COMBI 1210
2 cable glands ESKV-L 25 included
Breathing via VentPLUG mounted in end cap
Mounting via 2 mounting rails

Recommended accessories

SP-MPL Vibration damper (2 pcs)	22000874
--	----------


Spare parts

SP-4000-Pipe clamps with rail	22000723
--------------------------------------	----------

23.05.2026

Your Contact:

WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com

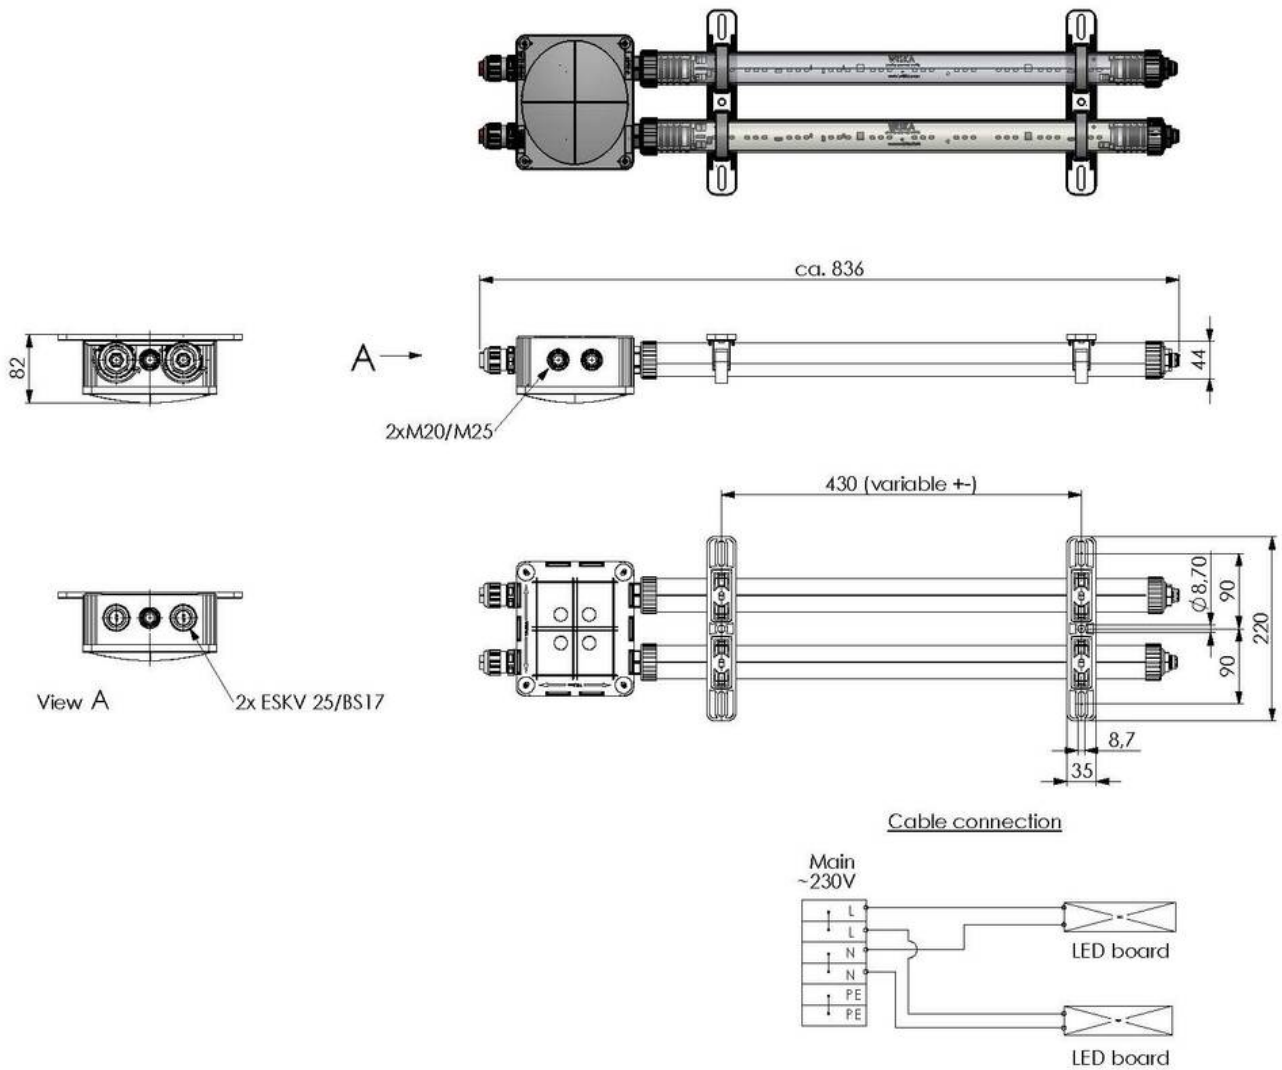


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

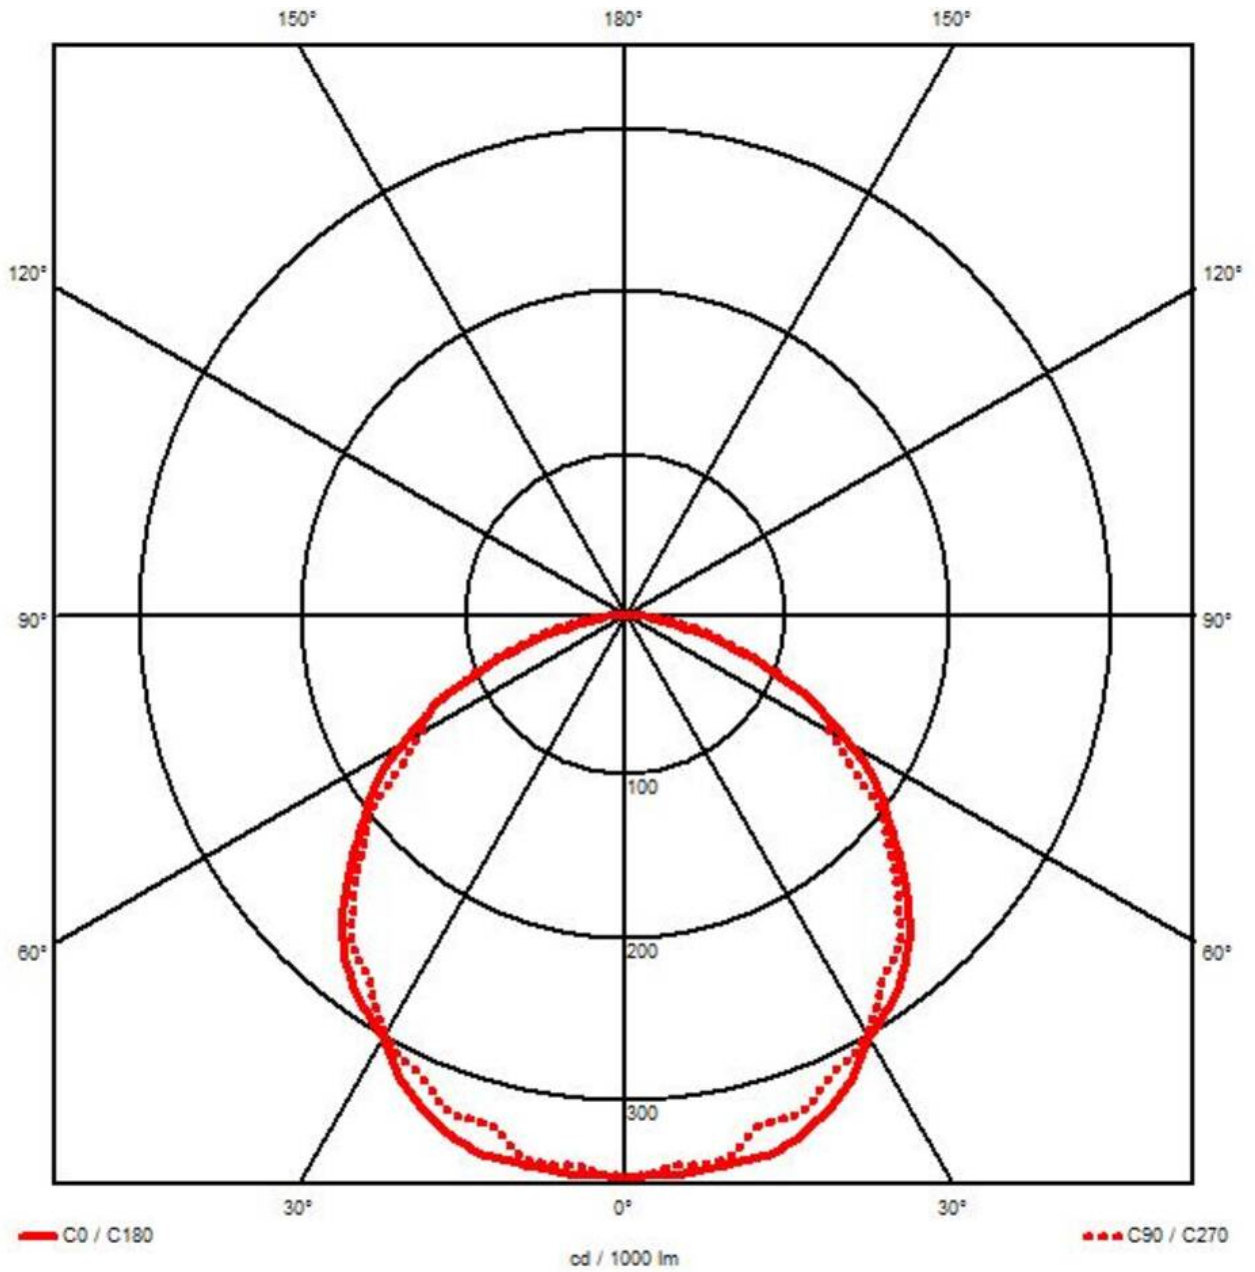

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

✉ contact@wiska.de · 🌐 www.wiska.com