


4000-2x13-230-4-S-SR2-LE

LED multi-purpose luminaire 4000, 2x13W 230V, plastic, IP68



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

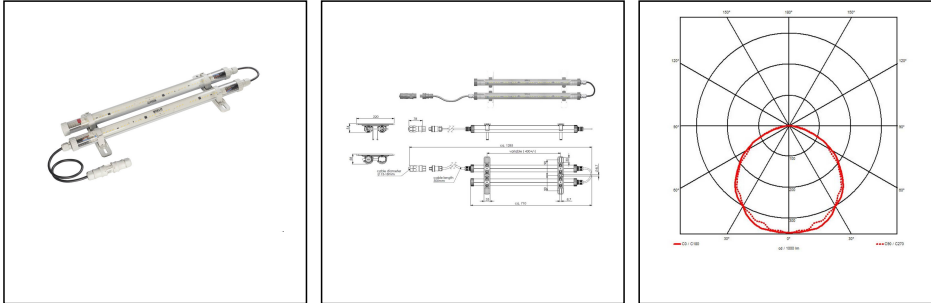

WISKA-Order no.	10112862
Type	4000-2x13-230-4-S-SR2-LE
Material	Polycarbonate
Globe colour	Clear
Wattage	26 W
Power[^]	2 x 13 W
Voltage	230 V
Protection class	IP66 / IP68 (0,2 bar 30min)
Type of Voltage	AC
Frequence	50/60 Hz
Connection	plug-cable-socket
Operational areas	Outdoor, Engine room, Cargo hold
Temp. range min	-30 °C
Temp. range max	55 °C
Lightsource	LED
Lightsource incl.	Yes
Colour temperature	5600 K
Luminous flux	2800 lm
Colour rendering index	CRI > 80
Ø cable diameter min	13 mm
Ø cable diameter max	18 mm
Rated Lifetime	L70/B50 @Ta +35 °C
System Lifetime	100000 h
Mounting	Ceiling, Wall, Surface mounting
Colour	RAL 7035

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

External dimensions LxWxH	755x220x54mm
Approval	RMRS, DNV-GL
Weight	0,6 kg

Remarks:

LED strip

0,5m connection cable 2x1,5mm²

with Wieland quick connector

male/female

for cable out diameter 13-18mm

without throughwiring

Breathing via VentGLAND® mounted

in end cap

Mounting via two rails

Recommended accessories

SP-MPL Vibration damper (2 pcs)	22000874
--	----------

Spare parts

SP-4000-Pipe clamps with rail	22000723
--------------------------------------	----------

23.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

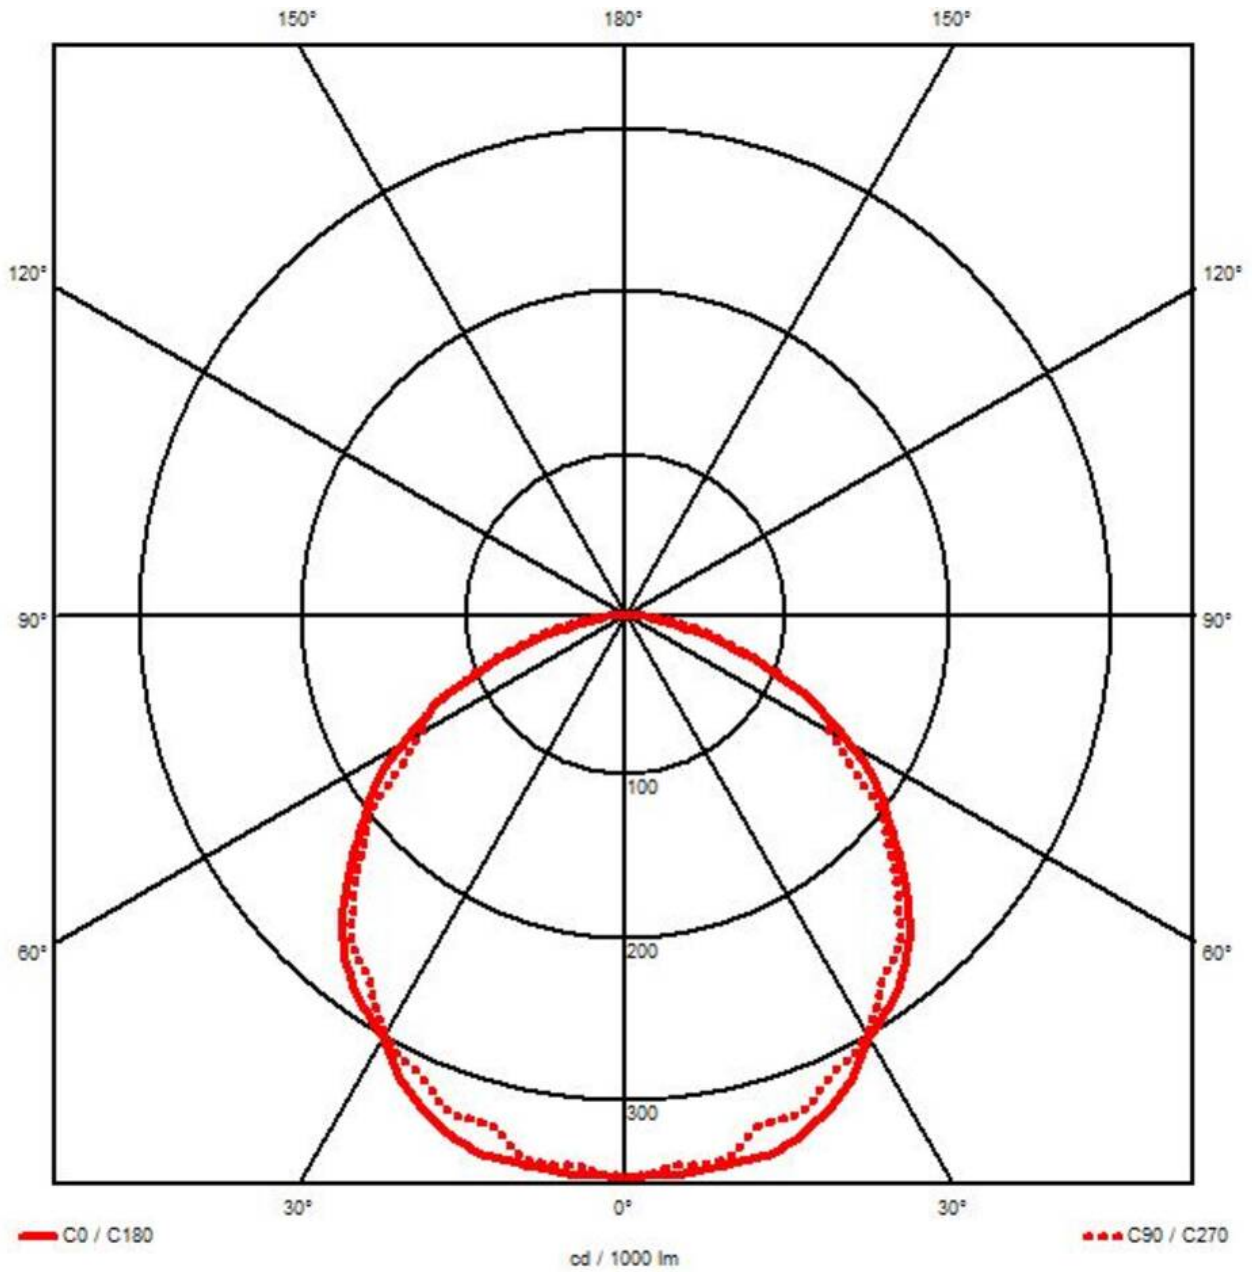

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice