


## 4000-2x13-230-4-T-SR0-LE

LED multi-purpose luminaire 4000, 2x13W 230V, plastic, IP68



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

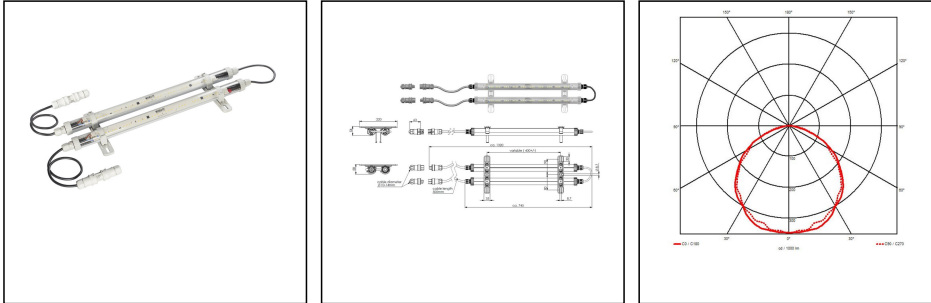

|                               |                                  |
|-------------------------------|----------------------------------|
| <b>WISKA-Order no.</b>        | 10112863                         |
| <b>Type</b>                   | 4000-2x13-230-4-T-SR0-LE         |
| <b>Material</b>               | Polycarbonate                    |
| <b>Globe colour</b>           | Clear                            |
| <b>Wattage</b>                | 26 W                             |
| <b>Power<sup>^</sup></b>      | 2 x 13 W                         |
| <b>Voltage</b>                | 230 V                            |
| <b>Protection class</b>       | IP66 / IP68 (0,2 bar 30min)      |
| <b>Type of Voltage</b>        | AC                               |
| <b>Frequence</b>              | 50/60 Hz                         |
| <b>Connection</b>             | plug-cable-socket                |
| <b>Operational areas</b>      | Outdoor, Engine room, Cargo hold |
| <b>Temp. range min</b>        | -30 °C                           |
| <b>Temp. range max</b>        | 55 °C                            |
| <b>Lightsource</b>            | LED                              |
| <b>Lightsource incl.</b>      | Yes                              |
| <b>Colour temperature</b>     | 5600 K                           |
| <b>Luminous flux</b>          | 2800 lm                          |
| <b>Colour rendering index</b> | CRI > 80                         |
| <b>Ø cable diameter min</b>   | 10 mm                            |
| <b>Ø cable diameter max</b>   | 14 mm                            |
| <b>Through wiring</b>         | 2x1,5mm <sup>2</sup>             |
| <b>Rated Lifetime</b>         | L70/B50 @Ta +35 °C               |
| <b>System Lifetime</b>        | 100000 h                         |
| <b>Mounting</b>               | Ceiling, Wall, Surface mounting  |

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

|                                  |                |
|----------------------------------|----------------|
| <b>Colour</b>                    | RAL 7035       |
| <b>Equipment</b>                 | Through wiring |
| <b>External dimensions LxWxH</b> | 750x220x54mm   |
| <b>Approval</b>                  | RMRS, DNV-GL   |
| <b>Weight</b>                    | 1,2 kg         |

Remarks:

LED strip  
 0,5m connection cable 2x1,5mm<sup>2</sup>  
 with two Wieland quick connector  
 male/female  
 for cable out diameter 10-14mm  
 with throughwiring  
 Breathing via VentGLAND®  
 mounted in end cap  
 Mounting via two rails

**Recommended accessories**

|  |          |
|--|----------|
| <b>SP-MPL Vibration damper (2 pcs)</b> | 22000874 |
|--|----------|


**Spare parts**

|                                      |          |
|--------------------------------------|----------|
| <b>SP-4000-Pipe clamps with rail</b> | 22000723 |
|--------------------------------------|----------|

23.05.2026

Your Contact:

**WISKA Hoppmann GmbH**  
 Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany  
 ☎ +49-4191-508-0 · 📠 +49-4191-508-209  
 contact@wiska.de · www.wiska.com

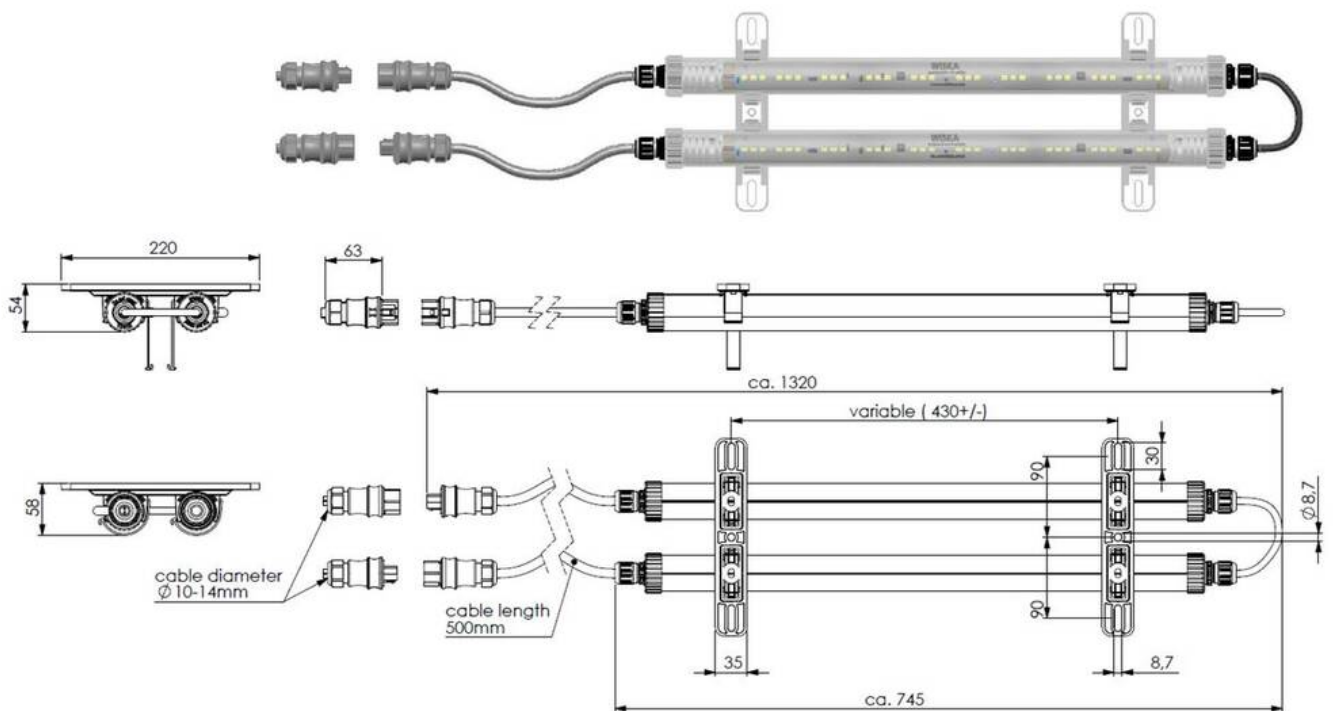


Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

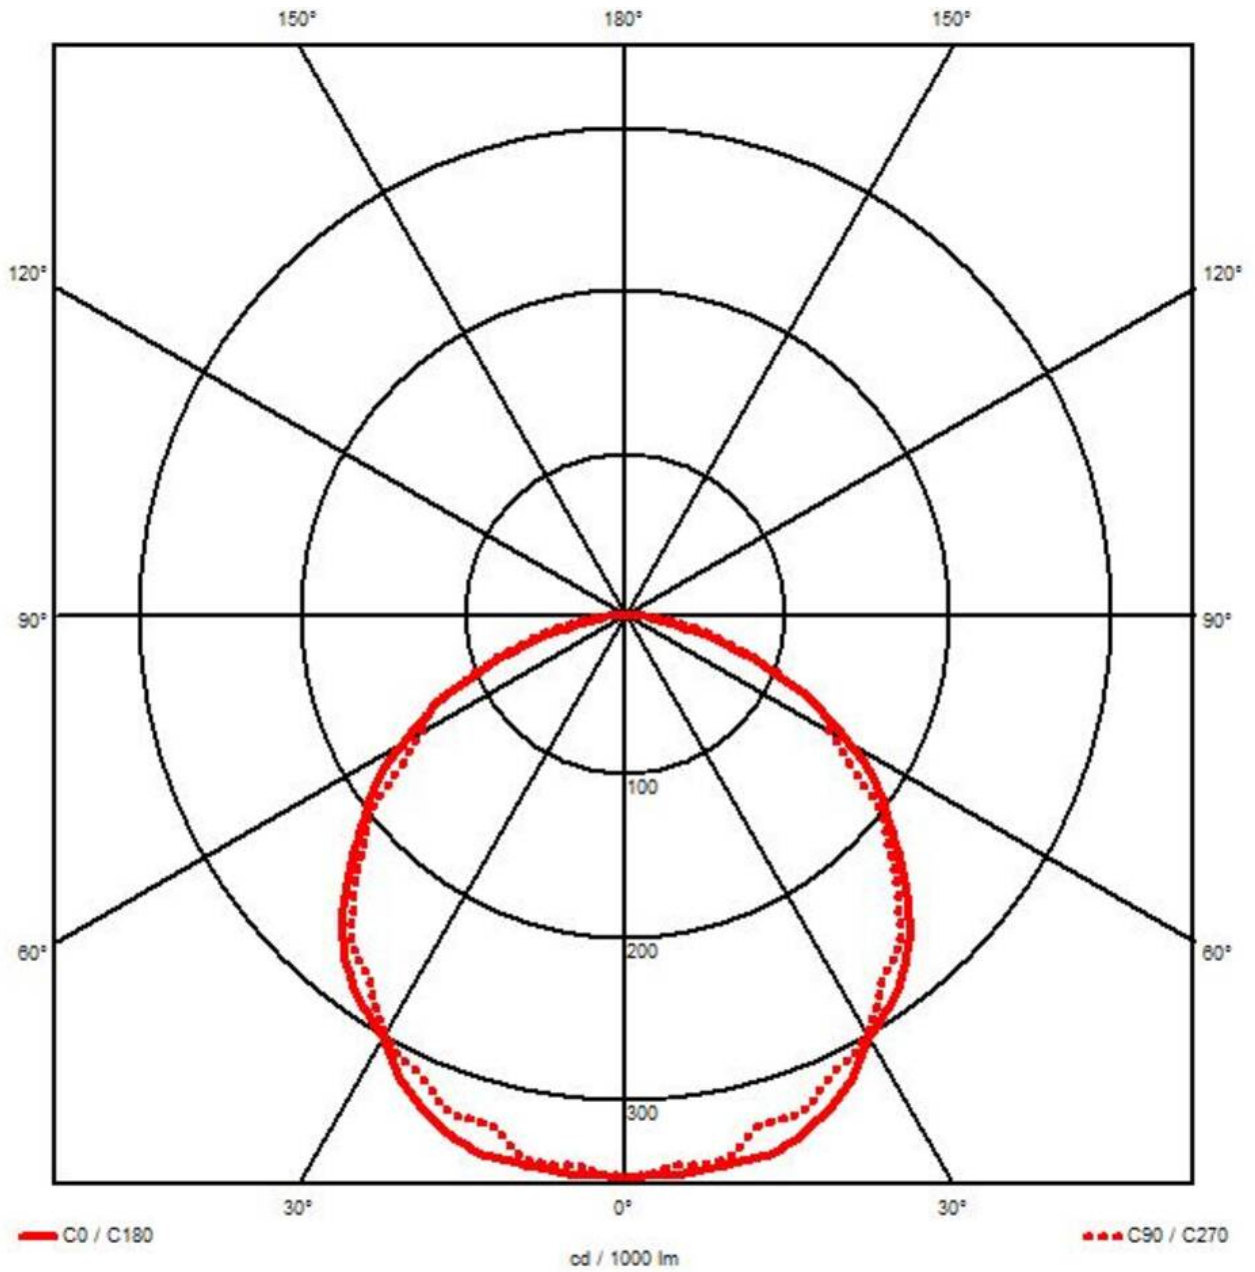

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

✉ contact@wiska.de · 🌐 www.wiska.com