


## 5010-PU-2x220W-230-AA-E01

Ballast Unit for LED Floodlight 5010 2x220W

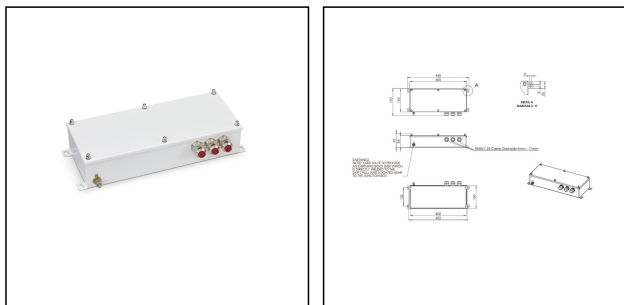

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

<b>WISKA-Order no.</b>	10113097
<b>Type</b>	5010-PU-2x220W-230-AA-E01
<b>Material</b>	Stainless steel
<b>Wattage</b>	440 W
<b>Power<sup>^</sup></b>	2 x 220 W
<b>Voltage min. (V)</b>	198 V
<b>Voltage max. (V)</b>	264 V
<b>Type of Voltage</b>	AC / DC
<b>Frequence</b>	50/60 Hz
<b>Protection class</b>	IP66 / IP67
<b>Operational areas</b>	Outdoor
<b>Temp. range min</b>	-25 °C
<b>Temp. range max</b>	45 °C
<b>Mounting</b>	Wall
<b>System Lifetime</b>	100000 h
<b>Type of cable gland</b>	M 25 x 1,5
<b>Material cable gland</b>	Brass nickel-plated
<b>Ø cable diameter min</b>	9 mm
<b>Ø cable diameter max</b>	17 mm
<b>External dimensions LxWxH</b>	440 x 160 x 90 mm
<b>Colour</b>	White
<b>Surface</b>	Powder coated
<b>Weight</b>	5,6 kg
<b>Tariff number</b>	85041080

Remarks:

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

## D4i-certificated ballast unit

The maximum cable length between the ballast unit and the floodlight must not exceed 50 metres.

## Spare parts

SP-5010-PU-2x220W-230 Mounting plate	22001430
SP-5010 LED Driver 220W	22001431

12.05.2026



Your Contact:

**WISKA Hoppmann GmbH**


Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209



contact@wiska.de · www.wiska.com

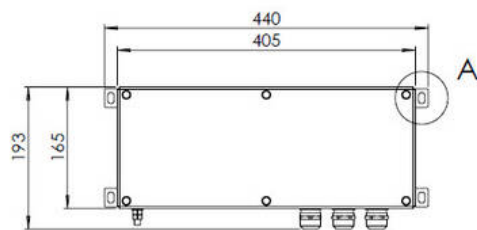

DETAIL A  
MAßSTAB 2 : 5

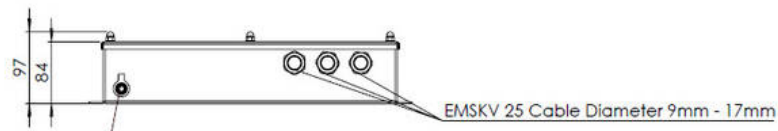

**EARTHING!**  
NOTE: YARD HAVE TO PROVIDE AN EARTHING BOLD (M8) WHICH IS DIRECTLY WELDED TO THE SHIP'S HULL AND LOCATED NEAR TO THE JUNCTION BOX.

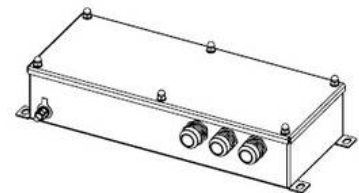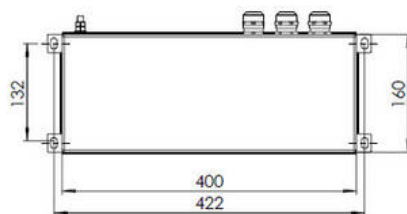

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com