


CH-S160-2/4032H/FIX

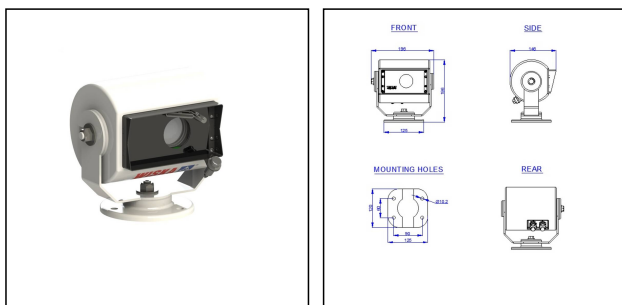

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Type	CH-S160-2/4032H/FIX
WISKA-Order no.	10113231
Material	Stainless Steel 316L (1.4404)
Surface	Powder coated
Colour	RAL 9016
Operational areas	Outdoor
Weight	5 kg
Protection class	IP66 / IP68 (0,2 bar 30min)
Temp. range min	-55 °C
Temp. range max	55 °C
Humidity	100 %
Wash&Wipe	No
Resolution	max. 4MP (2560x1440)
Image Sensor	1/2.8" Starvis CMOS
Video Standard	Digital
Video Streaming	H.264/H.265/MJPEG
Zoom	Yes
Zoom (opt. x digi.)	512 (opt: 32x digi: 16x)
Frames per Second	30
Lighting Conditions	Low light
Min. illumination	0,005 lx / 0,0005 lx (b/w)
Angle of View (horizontal)	55.8° - 2.3°
Angle of View (vertical)	31.9° - 1.3°
Pan/Tilt	Hand operated
Presets P/T	No

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Rotation horizontal	360 °
Rotation vertical	+70° / -90°
Mounting	Upside, Upside down
Vibration (0-100Hz)	DNV class A / C (0,7 / 2,3g)
Voltage	24 V
Type of Voltage	DC
Wattage	45 W
Junction box required	Yes
CCTV add-on	BLC, HLC, DWDR
Tariff number	85258100

Remarks:

IP Outdoor Camera station CH-S160-2,
IP66/IP68, FIX,
Resolution 2560x1440 (4MP),
32x optical zoom, low light, RAL9016,
SUS316L, -55°C/55°C,
with manual pan/tilt device
Cable length 5m
Junction box type IBSxx20 not included!

12.08.2026

Your Contact:


WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany


☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com


FRONT

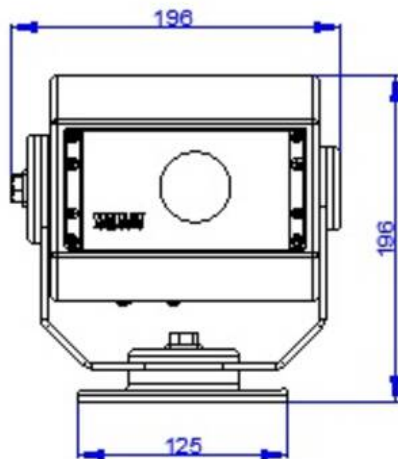


SIDE

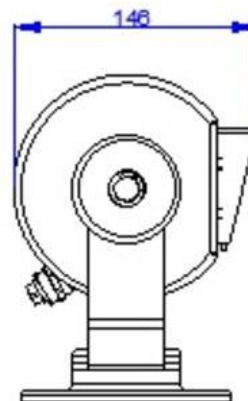

MOUNTING HOLES

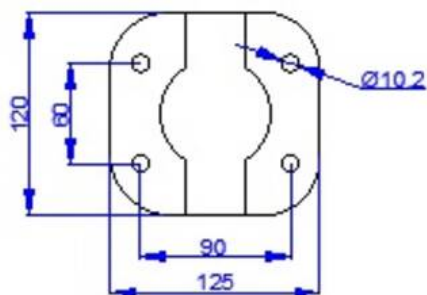

REAR



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com