
CS-S160-2/TM5401-35/PTZ





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Type	CS-S160-2/TM5401-35/PTZ
WISKA-Order no.	10113244
Material	Stainless steel
Surface	Powder coated
Colour	RAL 9016
Operational areas	Outdoor
Weight	20 kg
Protection class	IP66 / IP68 (0,2 bar 30min)
Temp. range min	-30 °C
Temp. range max	55 °C
Humidity	100 %
Resolution	400x300
Image Sensor	Uncooled Micro bolometer
Video Standard	Digital
Video Streaming	H.264/MJPEG
Zoom	Yes
Zoom (opt. x digi.)	digital zoom
Frames per Second	25
Lighting Conditions	Thermal image uncooled
Wash&Wipe	No
Min. illumination	0.0 lx
Angle of View (horizontal)	11,1°
Angle of View (vertical)	8,3°
Detection	2288m
Pan/Tilt	Remote operated

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

P/T-Type	included
Presets P/T	Yes
Rotation horizontal	endless
Rotation vertical	+90° / -70°
Mounting	Upside, Upside down
Vibration (0-100Hz)	DNV class A / C (0,7 / 2,3g)
Voltage	230 V
Type of Voltage	AC
Wattage	70 W
Junction box required	No
CCTV add-on	Multistreaming
Tariff number	85258100


Remarks:

IP Thermal Image Camera Outdoor, CH-S160-2,
IP66/IP68, FIX, Uncooled micro bolometer,
resolution 400x300, H.264/Motion JPEG
Up to 30fps (export control regulations refers),
RAL9016, SUS316L, -30°C/55°C,
Detection range: ~2288m,
Object size: 4,0x1,4m,
Lens: 35mm,
Spectral range: 8 ~ 14 µm,
Manual pan&tilt mounting bracket
Cable length 5m
Junction box type IBSxx20 not included!

20.11.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

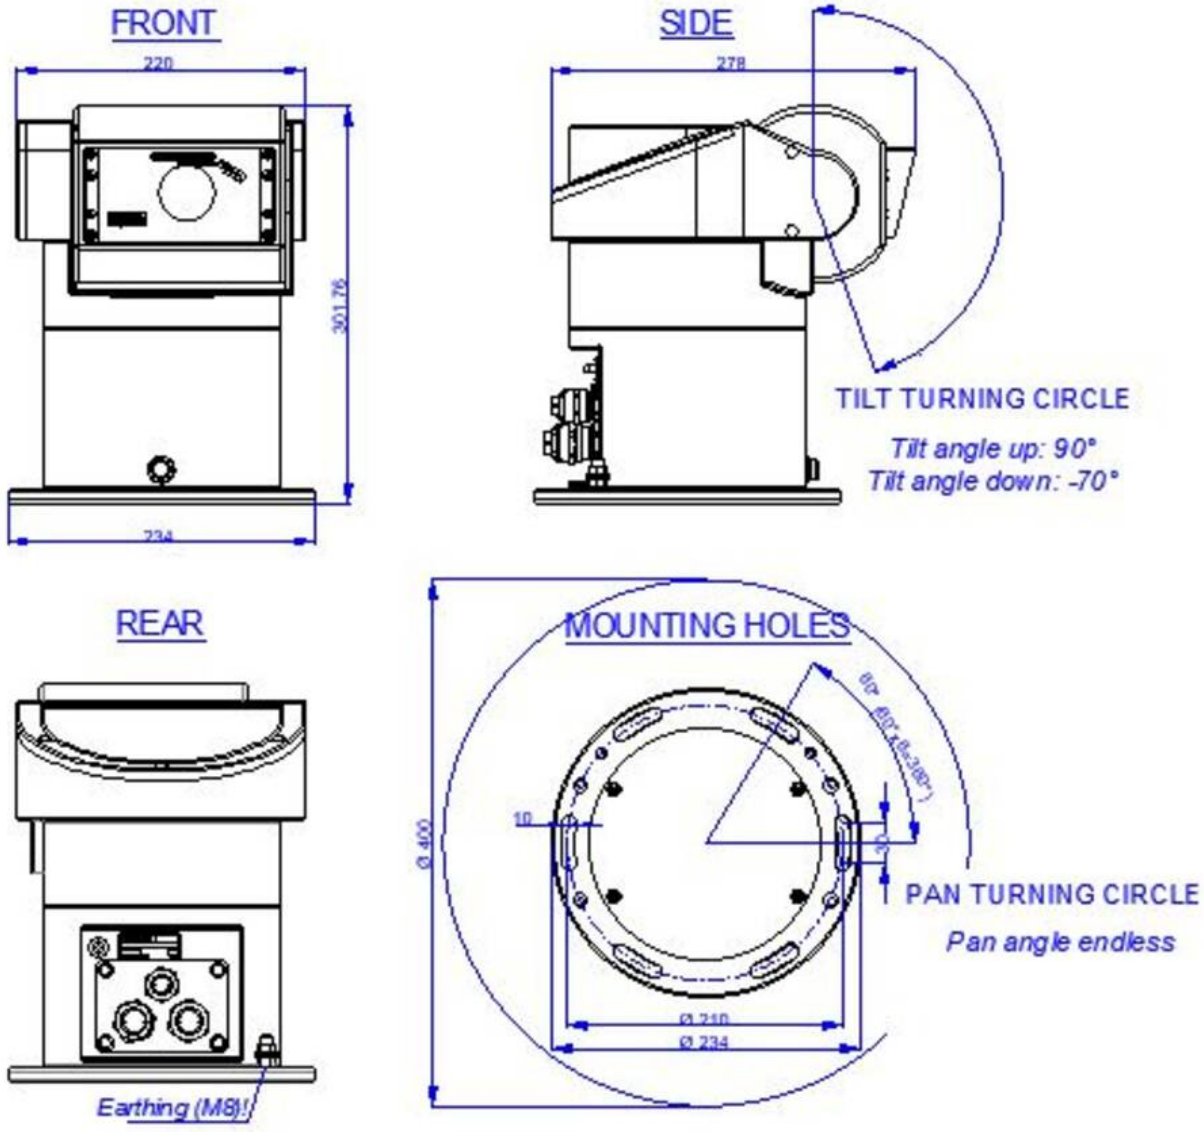

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice