


GM 16

Locknut, brass according to DIN 89280, M16



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

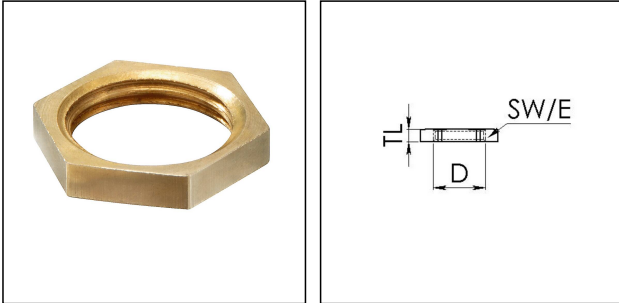

Material	Brass
Temp. range min	-150 °C
Temp. range max	250 °C
Thread type	M
Ø Connection thread D	16
Lead	1,5
Key width SW	22 mm
Collar diameter (E)	25 mm
Total length TL	4 mm
Advice	* Similar to DIN 89280
Surface	Bright
Order no. bright	50013662
Type	GM 16
Packing unit	1
ETIM-Classification	EC000940

23.05.2026

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com