


OSAJ 75 / M63(M)*M75(F)

Ex d enlargement adaptor, brass nickel-plated, M63-M75



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

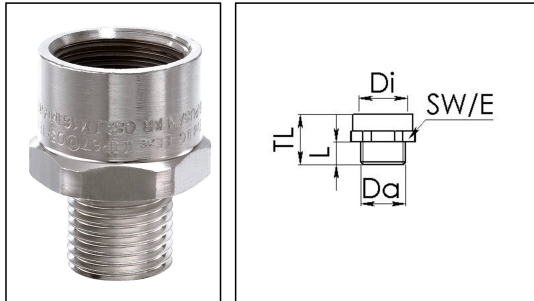

Material	Brass nickel-plated
Temp. range min	-60 °C
Temp. range max	110 °C
Protection class	IP66 / IP67
Type of protection	Ex eb, Ex db, Ex tb
Ex-Certificate	IECEx, ATEX
Thread type outer	M
Ø outer thread	63
Lead outer	1,5
Thread type inner	M
Ø inner thread	75
Lead inner	1,5
Length screw-in thread L	15 mm
Key width SW	82 mm
Collar diameter (E)	88 mm
Total length TL	42 mm
Surface	Nickel-plated
Order no. nickel-plated	50065703
Type	OSAJ 75 / M63(M)*M75(F)
Packing unit	1
Tariff number	74198090
EAN number	4007685657037
ETIM-Classification	EC000938

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

28.07.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com

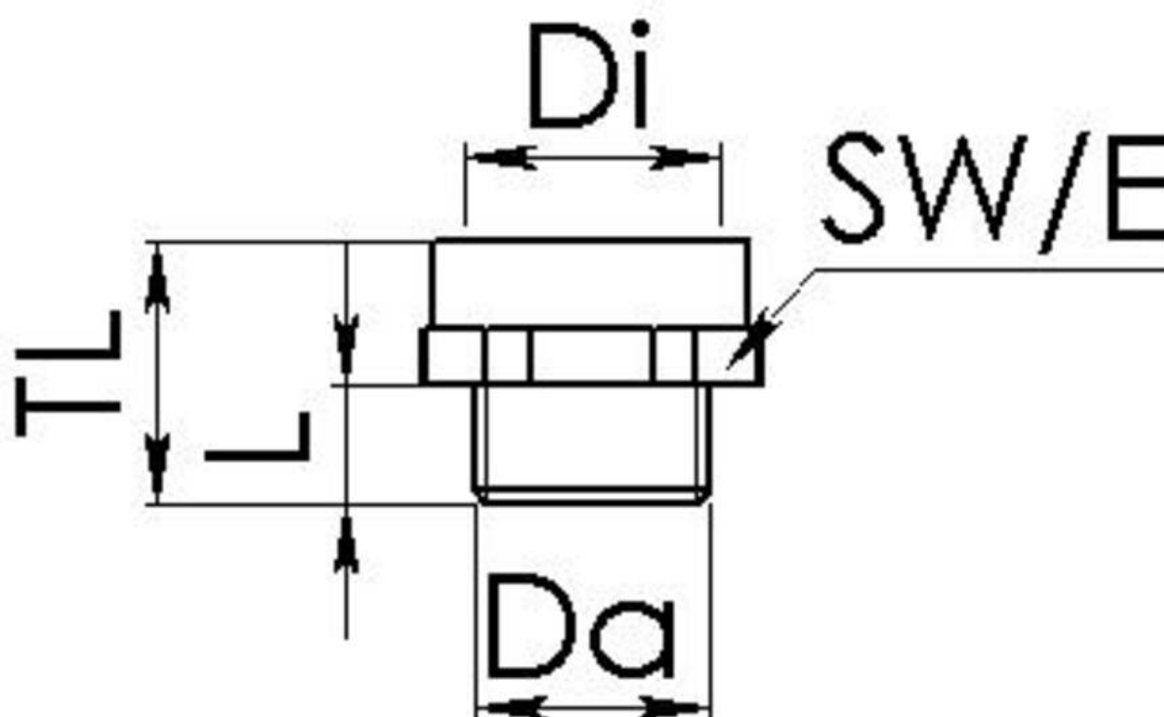

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice