


TKL-Tellus-R/W-34530DIM-SUNNEX

LED Chart table light 5W 12-24V AC/DC IP20

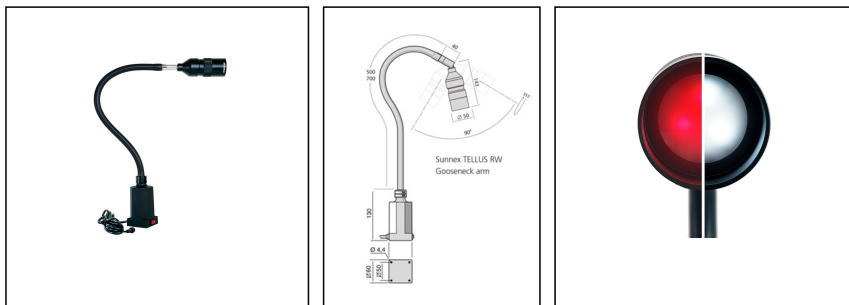

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

WISKA-Order no.	50109500
Type	TKL-Tellus-R/W-34530DIM-SUNNEX
Wattage	5 W
Power[^]	1 x 5 W
Voltage	24 V
Voltage min. (V)	12 V
Voltage max. (V)	24 V
Type of Voltage	AC / DC
Protection class	IP20
Lightsource	LED
Lightsource incl.	Yes
Bulb shape	reflector
Colour temperature	6500 K
Average lamp durability	30000 h
Mounting	Desktop
External dimensions LxWxH	970x60x68mm
Type of switch	On-Off, 2-pole
Colour	Black
Weight	1,2 kg

Remarks:

LED Chart table light - TELLUS R/W
 Light source: LED 5W inclusive and dimmable
 Red and white light colour
 Color Rendering Index: CRI 80
 Base: Equipped with four mouting holes

Your Contact:

WISKA Hoppmann GmbH
 Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
 ☎ +49-4191-508-0 · 📠 +49-4191-508-209
 contact@wiska.de · www.wiska.com

Power Switch and Rotary Dimmer

placed in the base

Cable length: 2m

Arm length: 700mm



Lamp head with joint

12.05.2026


Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com

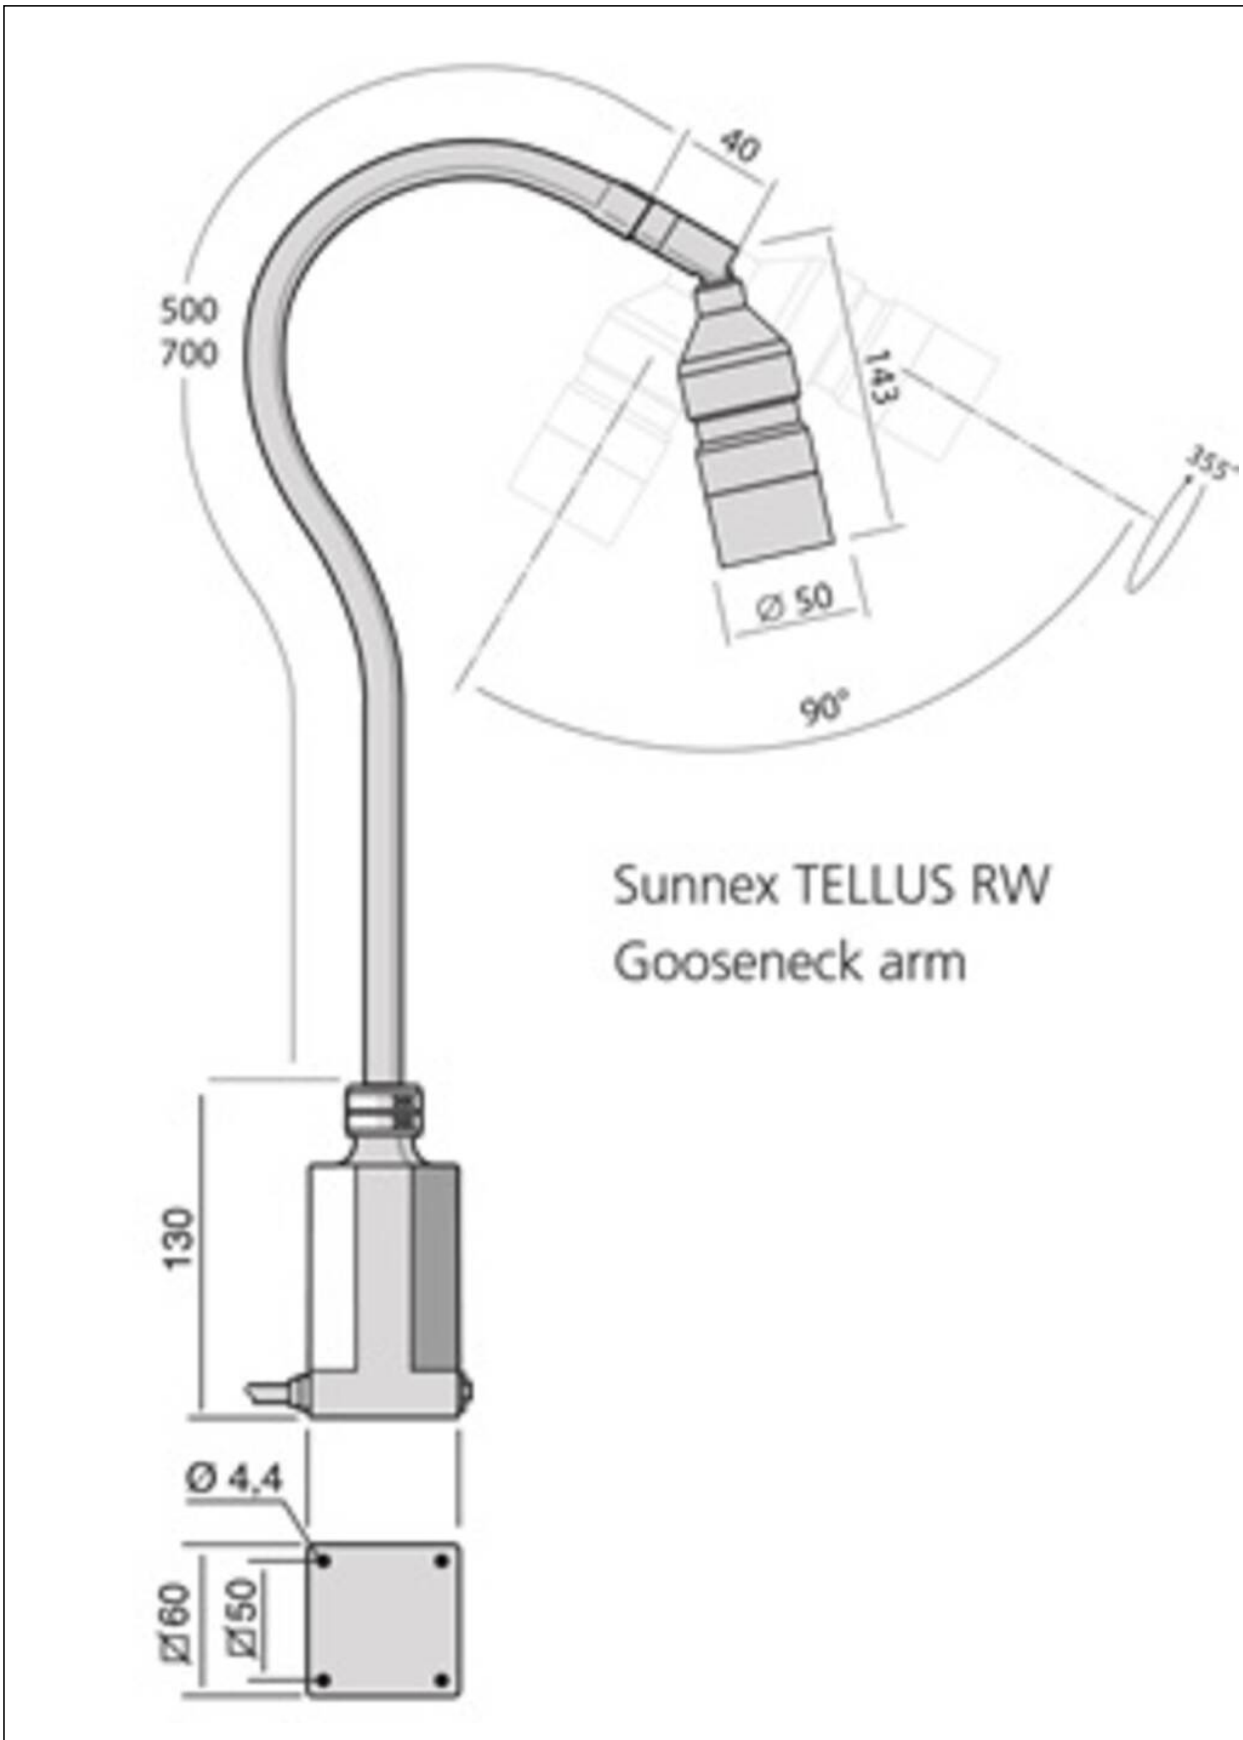

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com