


KVMP 36/36-W24

Cable gland, brass according to DIN 89280, M36-Pg36



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

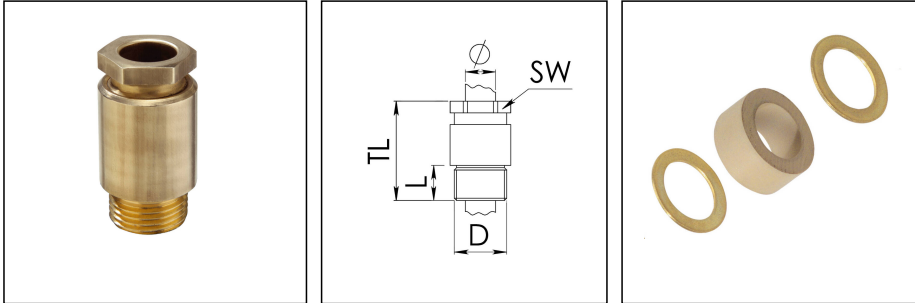

Material cable gland	Brass
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	PG
Ø Connection thread D	36
Length screw-in thread L	11 mm
Ø cable diameter min	22 mm
Ø cable diameter max	24,5 mm
Key width SW	36 mm
Collar diameter (E)	40 mm
Total length TL	56 mm
Install. torques fitting	15 N m
Install. torques cap nut	15 N m
Surface	Bright
Order no. bright	10011105
Type	KVMP 36/36-W24
Packing unit	1
Tariff number	74198090
EAN number	4007685111058

28.07.2026

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com